


I-LSM-TU-FP-4

INVERTED LIFT SYSTEM MEDIUM WITH TELESCOPE



future automation

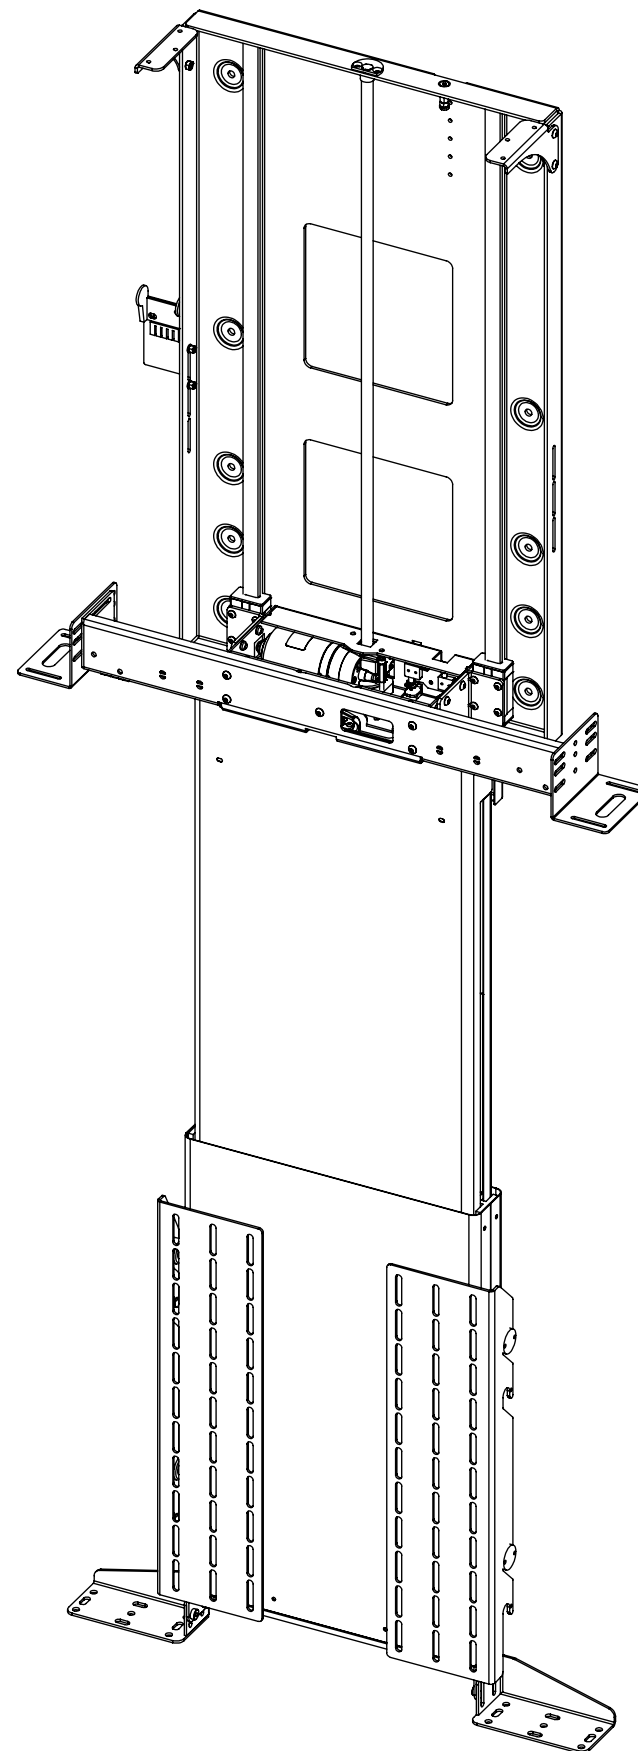

I-LSM-TU-FP-4

INVERTED LIFT SYSTEM MEDIUM WITH TELESCOPE



future automation

SPECIFICATION	MEASUREMENTS
Maximum Screen Height	680mm (26 3/4")
Maximum Lifting Capacity	30Kg (66lb)
Maximum Lift Distance	1147mm (45 3/16") from top of screen to cabinet top
Internal Cabinet Height	820mm (32 5/16")
Decibel Rating	52dB
Movement Type	Motorised
Power Supply Required	110V - 240V AC
Power Consumption	250 - 500W
Power Consumption Standby	3W
Mounting Patterns Supported	VESA 400, 300, 200 W x 400, 300, 200 H
Control Options	IR Remote, RS232, Contact Closure
Product Options / Features	Specific B&O and Loewe mounts / adapters, Custom RAL paint finishes
Package Contents	Mechanism, IR remote control
Marine Suitable	No

I-LSM-TU-FP-4

INVERTED LIFT SYSTEM MEDIUM WITH TELESCOPE




future automation


CABLE ROUTING

Screen Cables enter the top of the Telescopic Unit and are fed down through the Cable Track within. This can be accessed by removing the two front covers of the Telescopic Unit. The cables then pass through the LSM Beam and into the LSM Cable Track. Cables must be routed carefully to prevent any interference with the LSM beam as it operates.

Screen and Mechanism cables should be routed to a control box outside of the cabinet via an opening in the back of the cabinet or a conduit leading to the bottom.

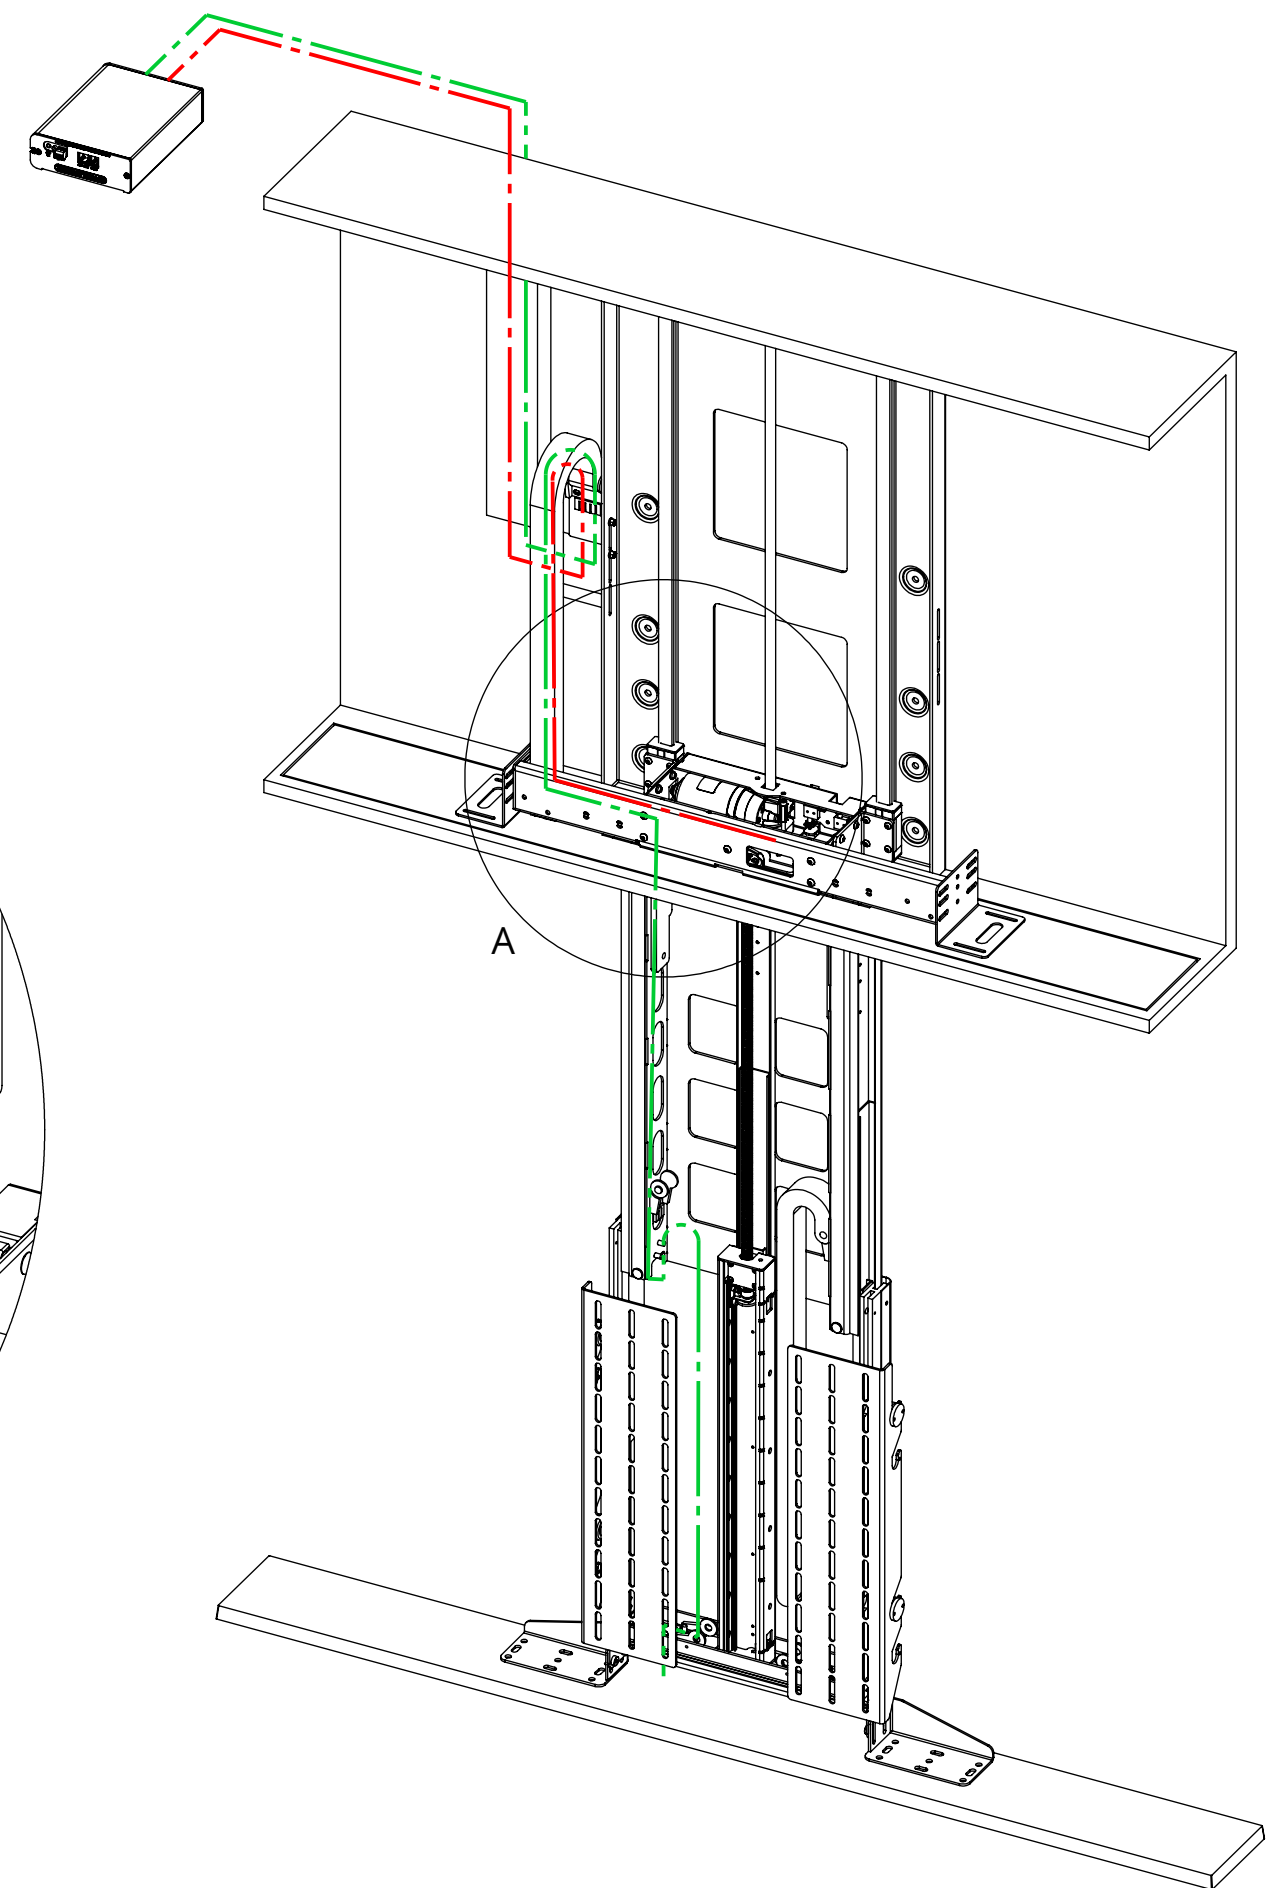

DETAIL A

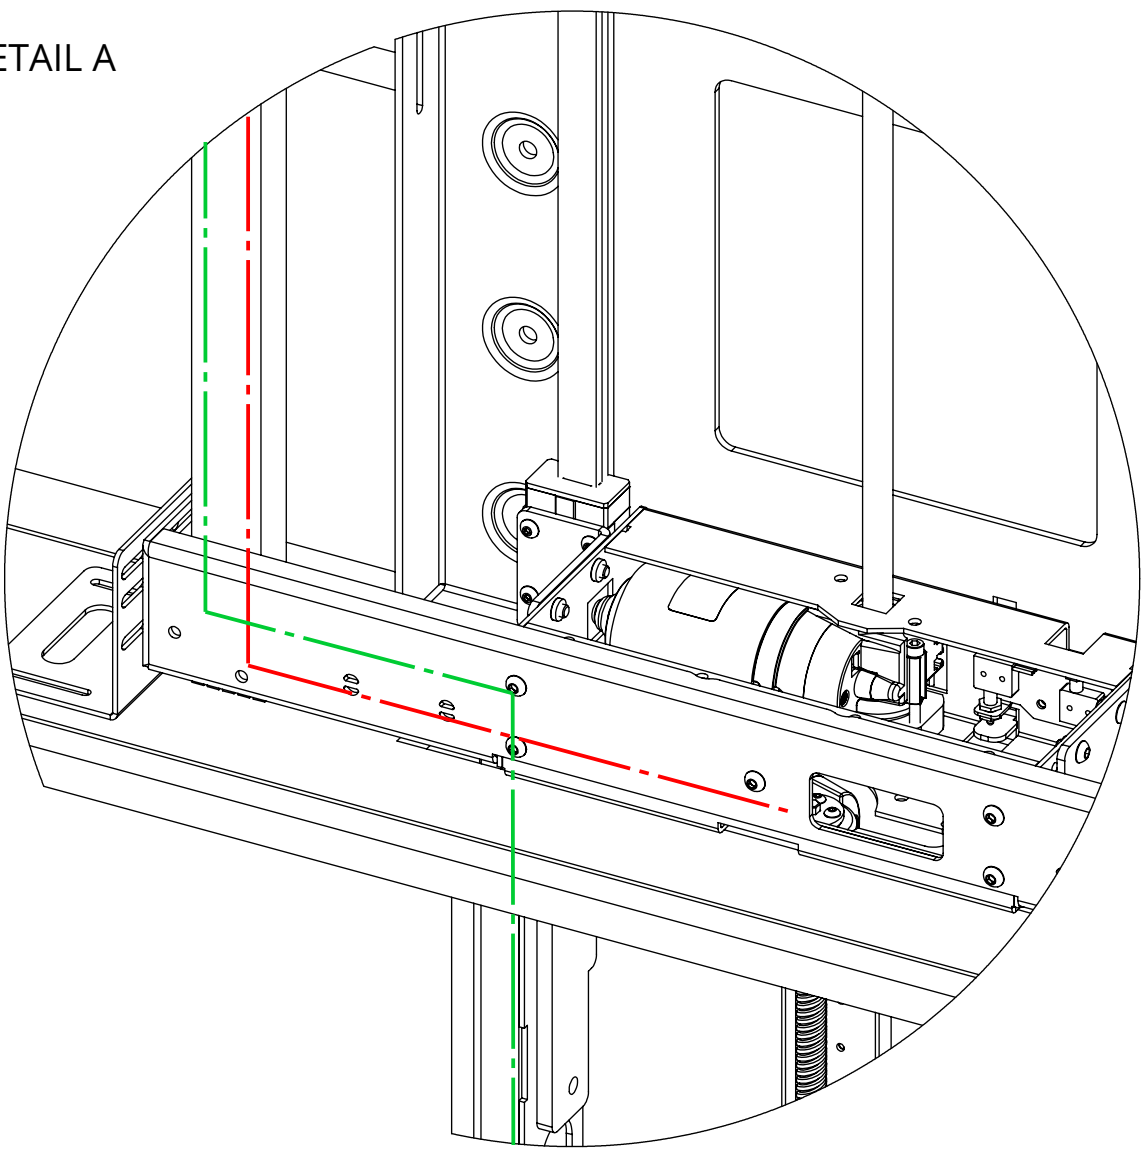



I-LSM-TU-FP-4

INVERTED LIFT SYSTEM MEDIUM WITH TELESCOPE



future automation

MECHANISM DOWN

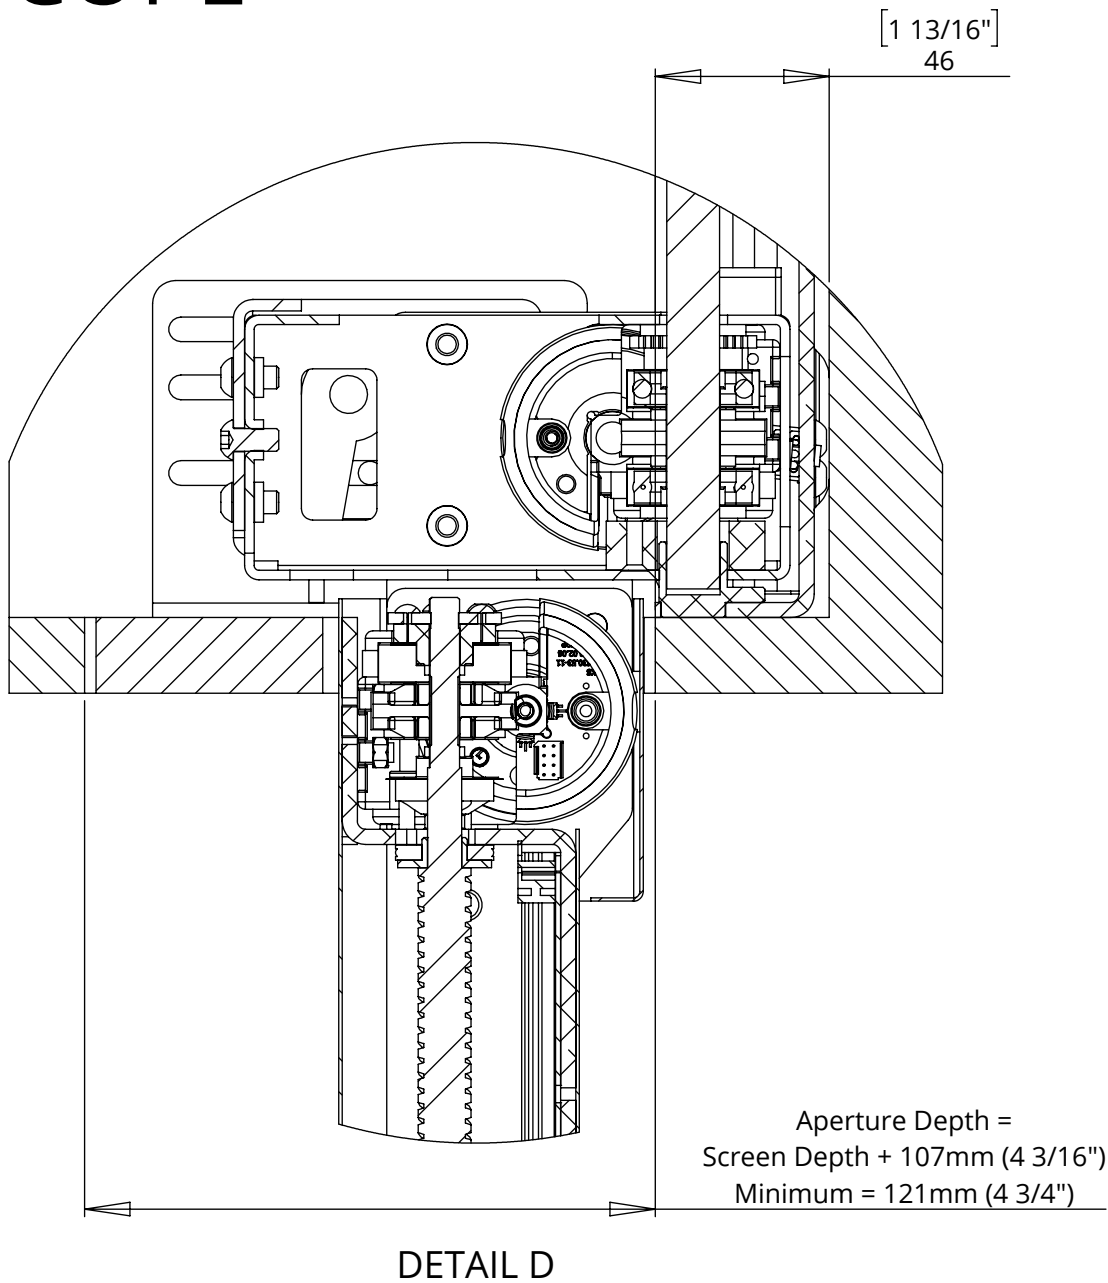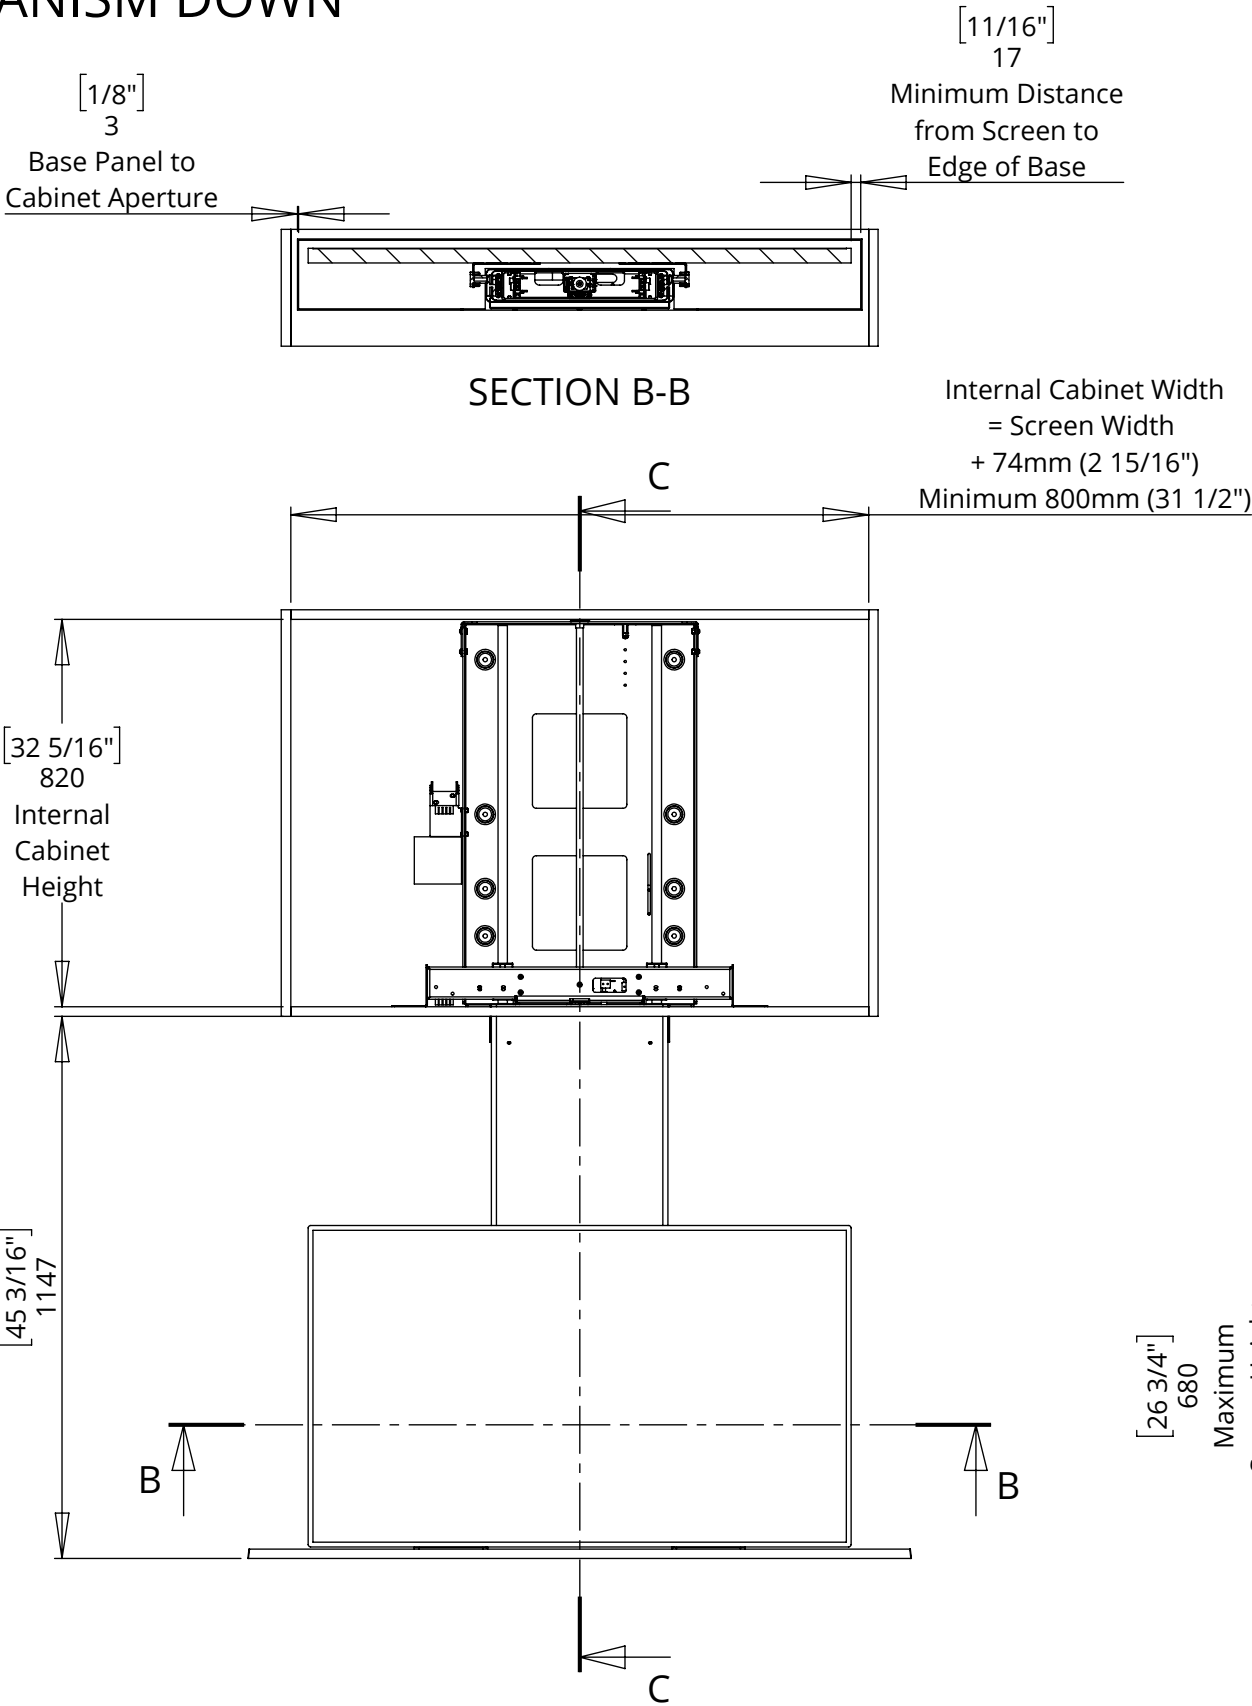

I-LSM-TU-FP-4



INVERTED LIFT SYSTEM MEDIUM WITH TELESCOPE





future automation

MECHANISM UP - IN CABINET

Aperture Depth =
Screen Depth + 107mm (4 3/16")
Minimum = 121mm (4 3/4")

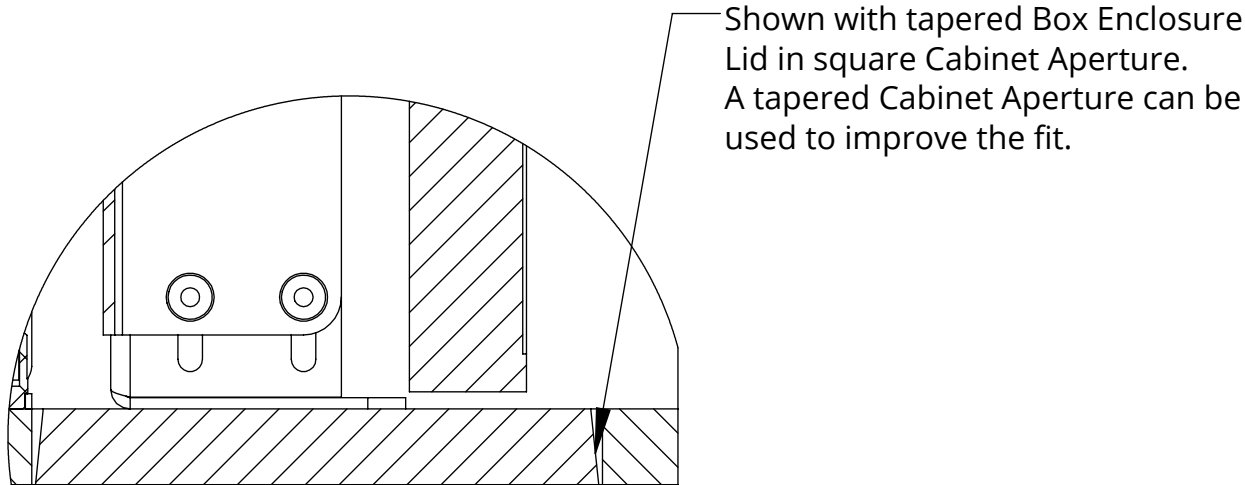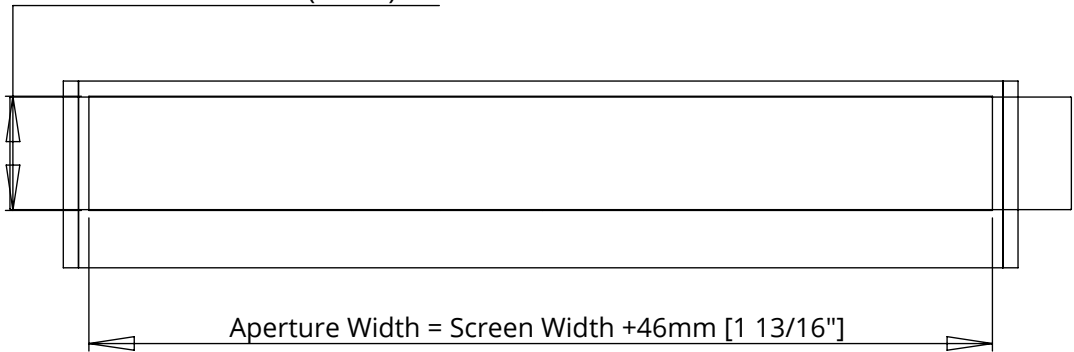

DETAIL F

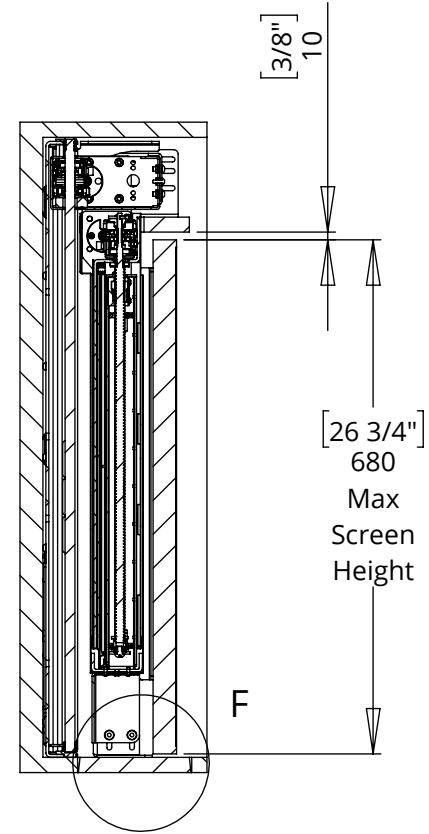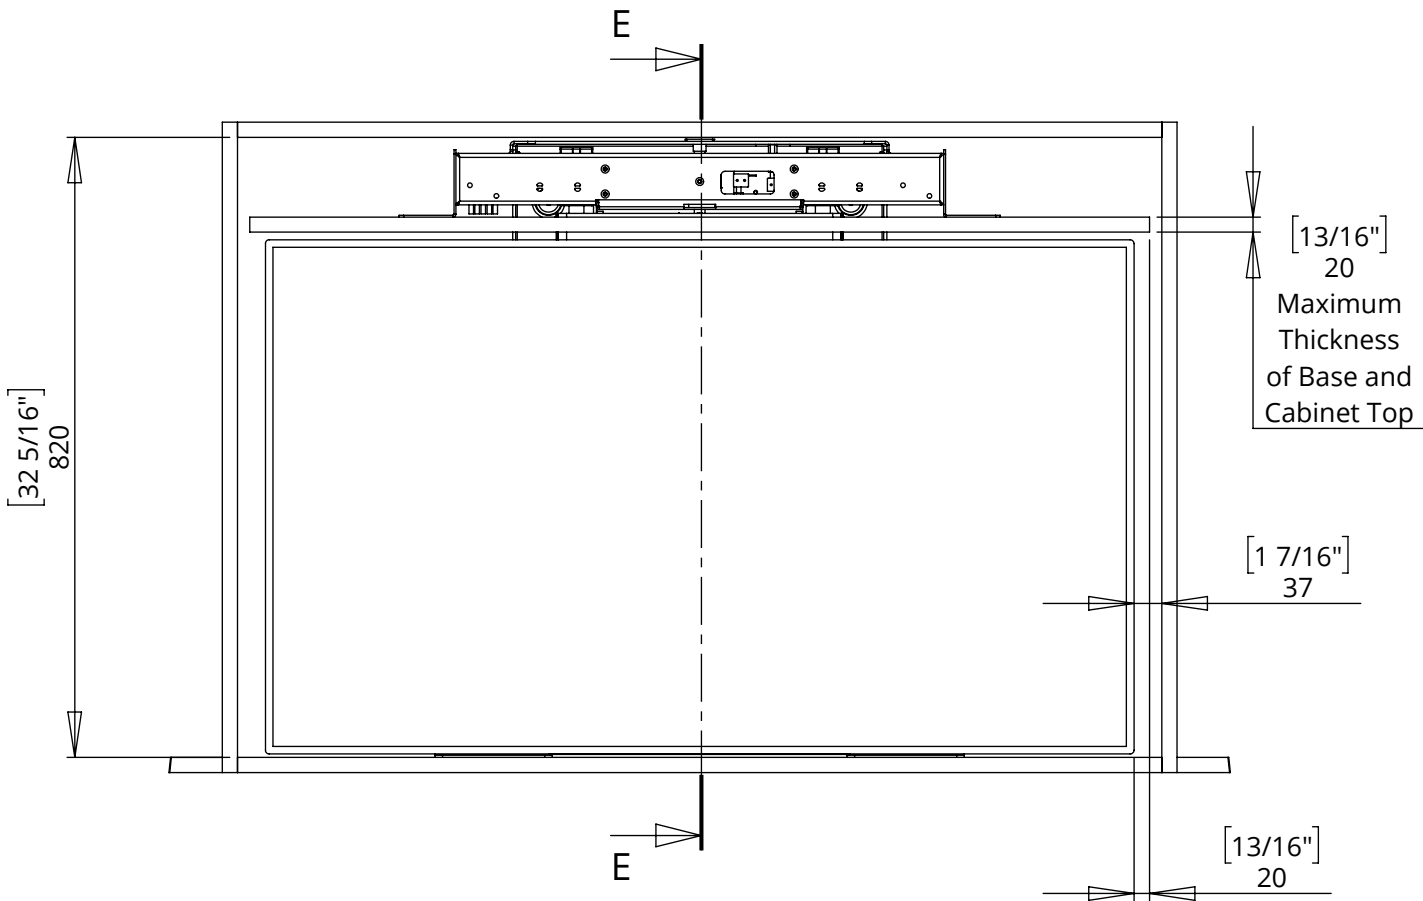

SECTION E-E


I-LSM-TU-FP-4

INVERTED LIFT SYSTEM MEDIUM WITH TELESCOPE



future automation

BASE PANEL AND FLAP PANEL DETAILS

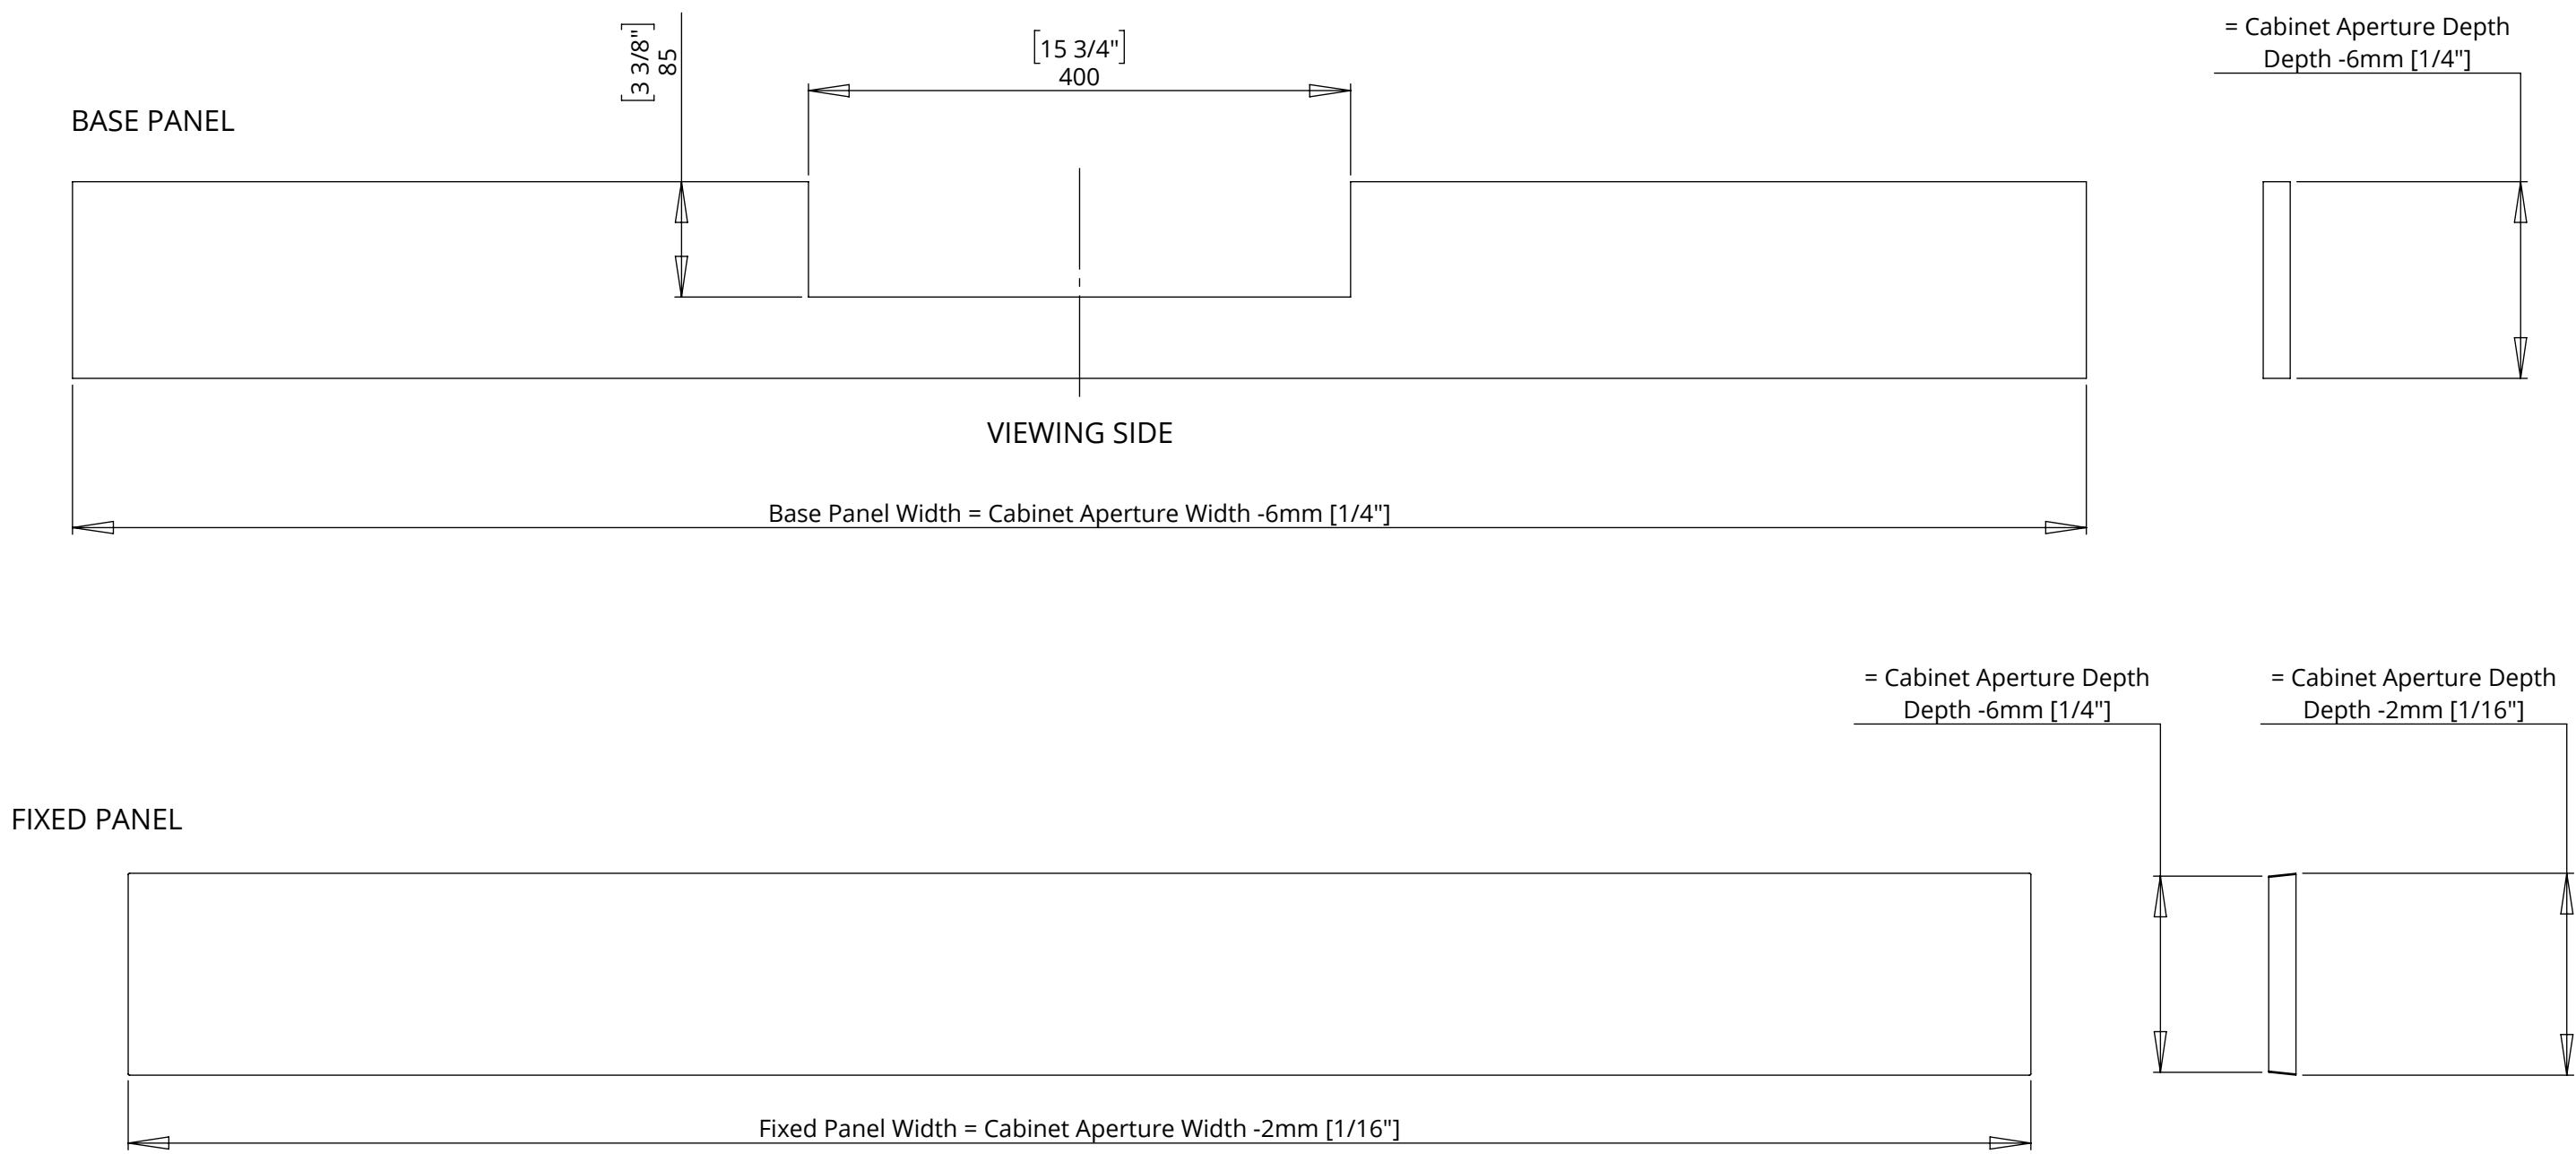

I-LSM-TU-FP-4



INVERTED LIFT SYSTEM MEDIUM WITH TELESCOPE



future automation

SCREEN MOUNT ADJUSTABILITY

A standard adjustable height VESA 400 mount is included. This is also compatible with VESA 300 and 200 mounting patterns

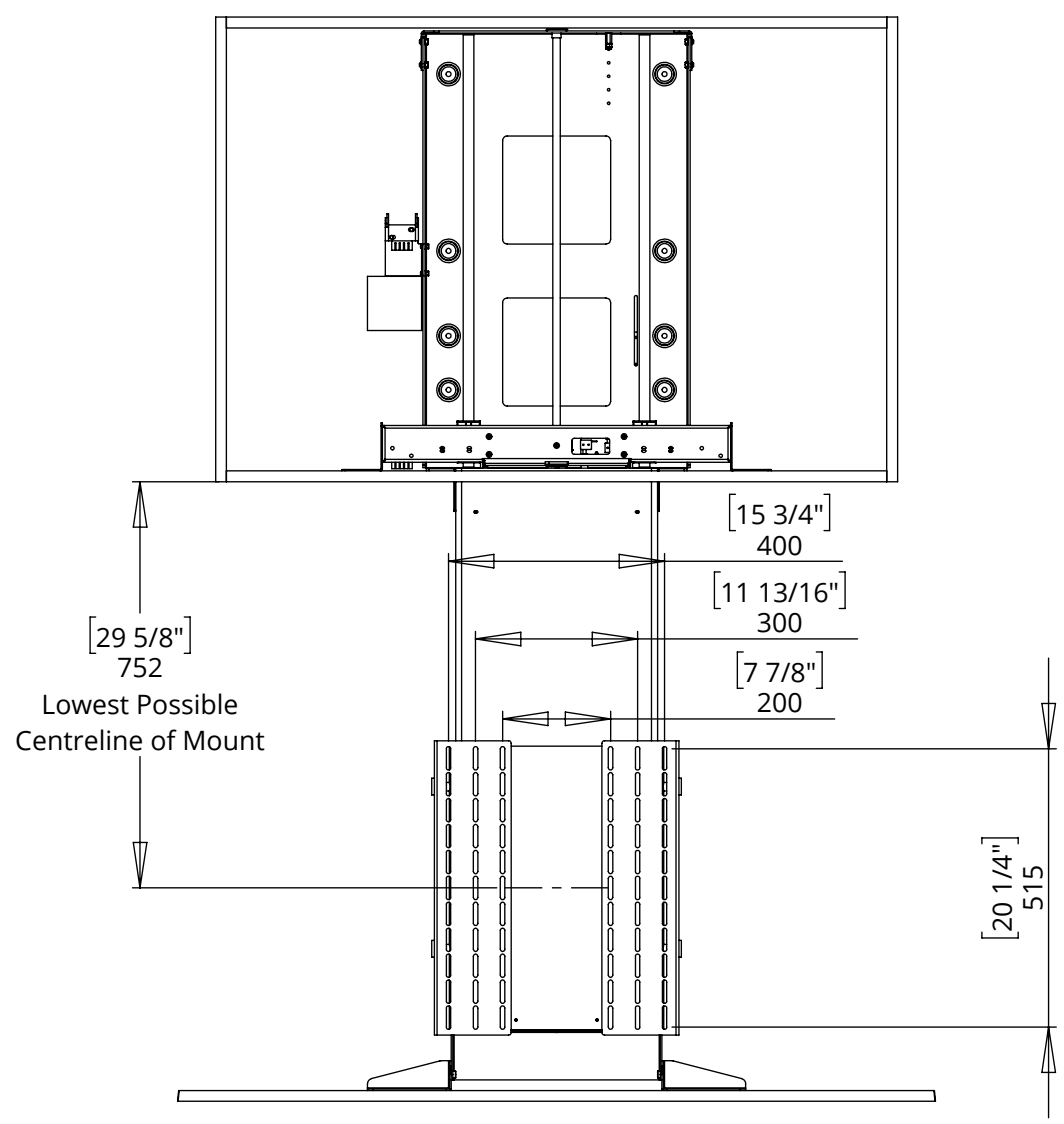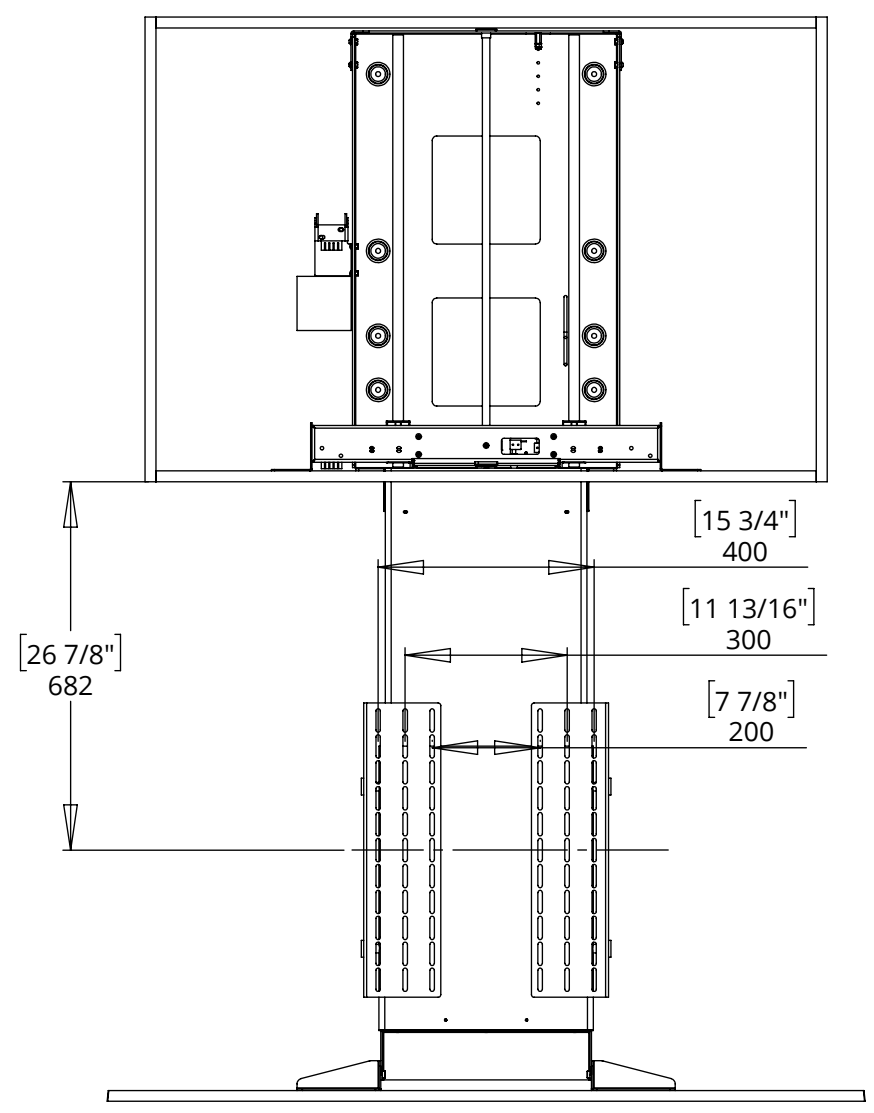

I-LSM-TU-FP-4

INVERTED LIFT SYSTEM MEDIUM WITH TELESCOPE



future automation

OVERALL MECHANISM DIMENSIONS

