





SPECIFICATION	MEASUREMENTS
Screen Sizes (Approx)	19" - 32"
Maximum Weight Capacity	25Kg (55lb)
Maximum Weight Capacity (Marine)	16Kg (35lb)
Maximum Screen Height	410mm (16.14")
Packaging Dimensions	920mm (36.2") x 550mm (21.7") x 250mm (9.8")
Shipping Weight	15Kg (33lb)
Movement Type	Motorised
Power Supply Required	110V or 240V AC
Power Consumption	250-500W
Power Consumption Standby	3W
Decibel Rating	58dB
Mounting Patterns Supported	VESA 200 W x 300, 200 H
Control Options	IR Remote, RS232, Contact Closure
Product Options / Features	Specific B&O and Loewe mounts / adapters, Custom RAL paint finishes, Outdoor version
Package Contents	Mechanism, IR remote control
Marine Suitable	Yes (Indoor)




### **CABLE ROUTING**

Screen cables are routed behind the Base Panel and out the right side of the Beam into the Cable Track. Cables must be routed carefully to prevent any interference with the LSL beam as it operates.

Screen and Mechanism cables should be routed to a control box in the bottom of the cabinet.

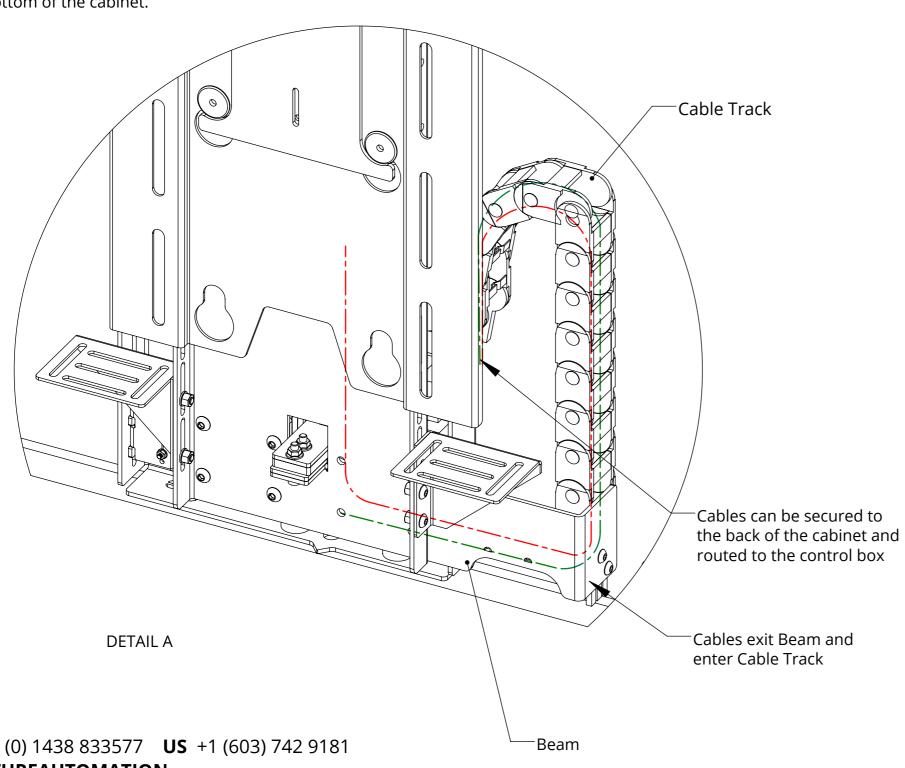

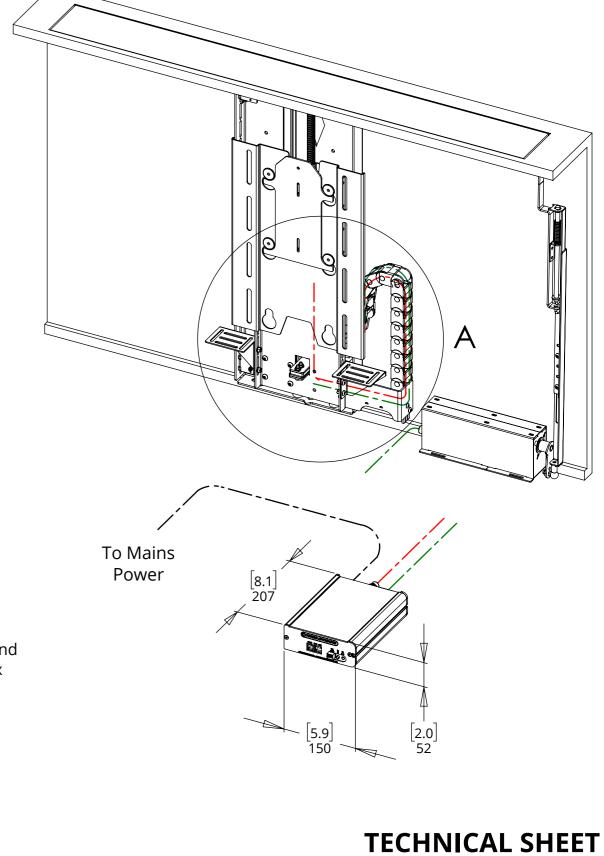


SHEET 3

**UK** +44 (0) 1438 833577 **US** +1 (603) 742 9181

WWW.FUTUREAUTOMATION.NET


### fa future automation


**MECHANISM UP - IN CABINET** 

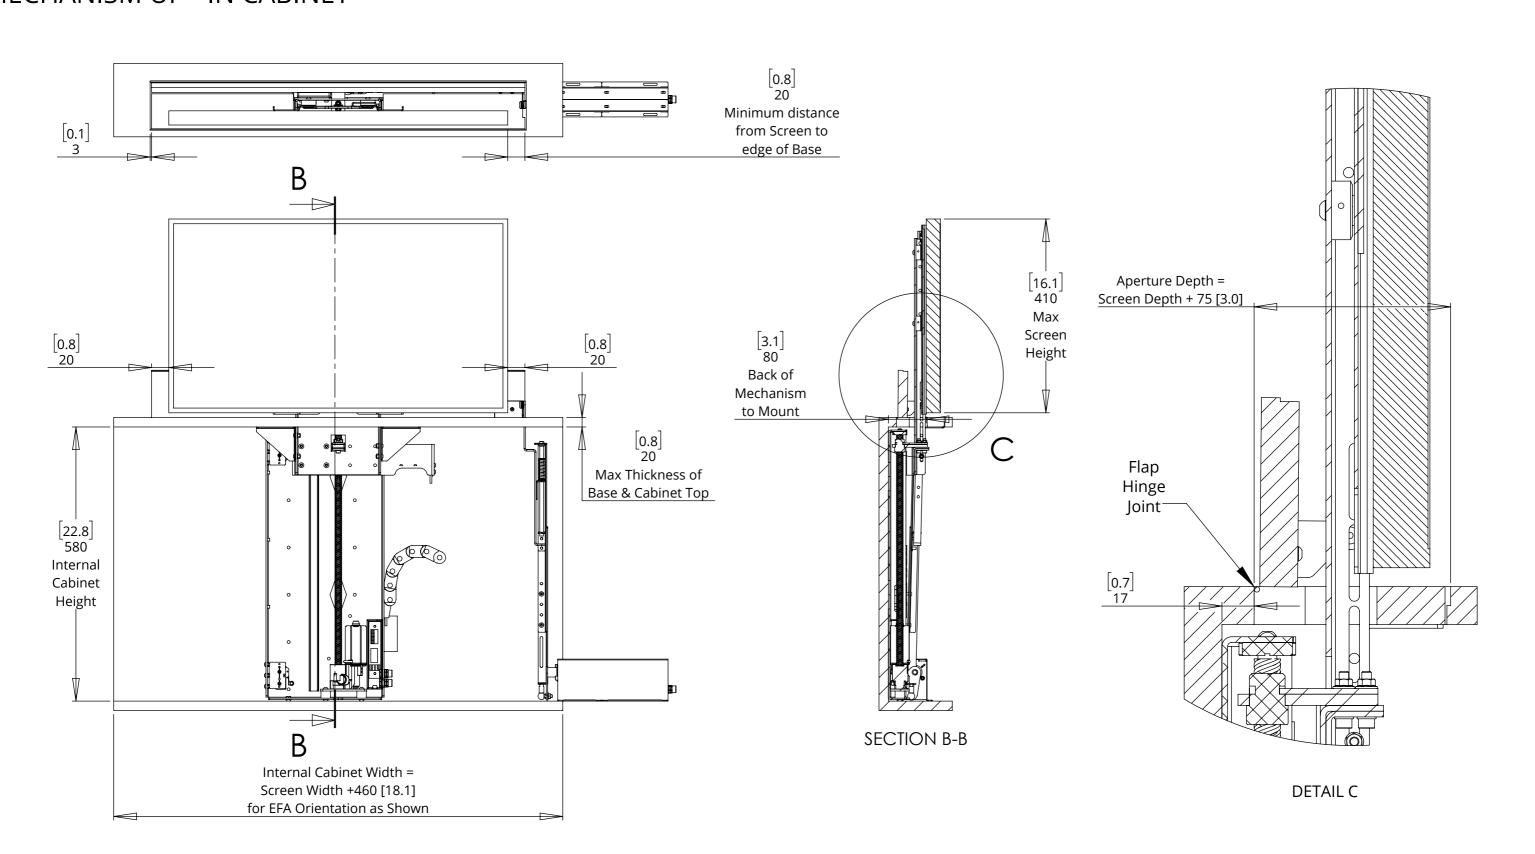

## fa future automation


### **MECHANISM DOWN - IN CABINET**

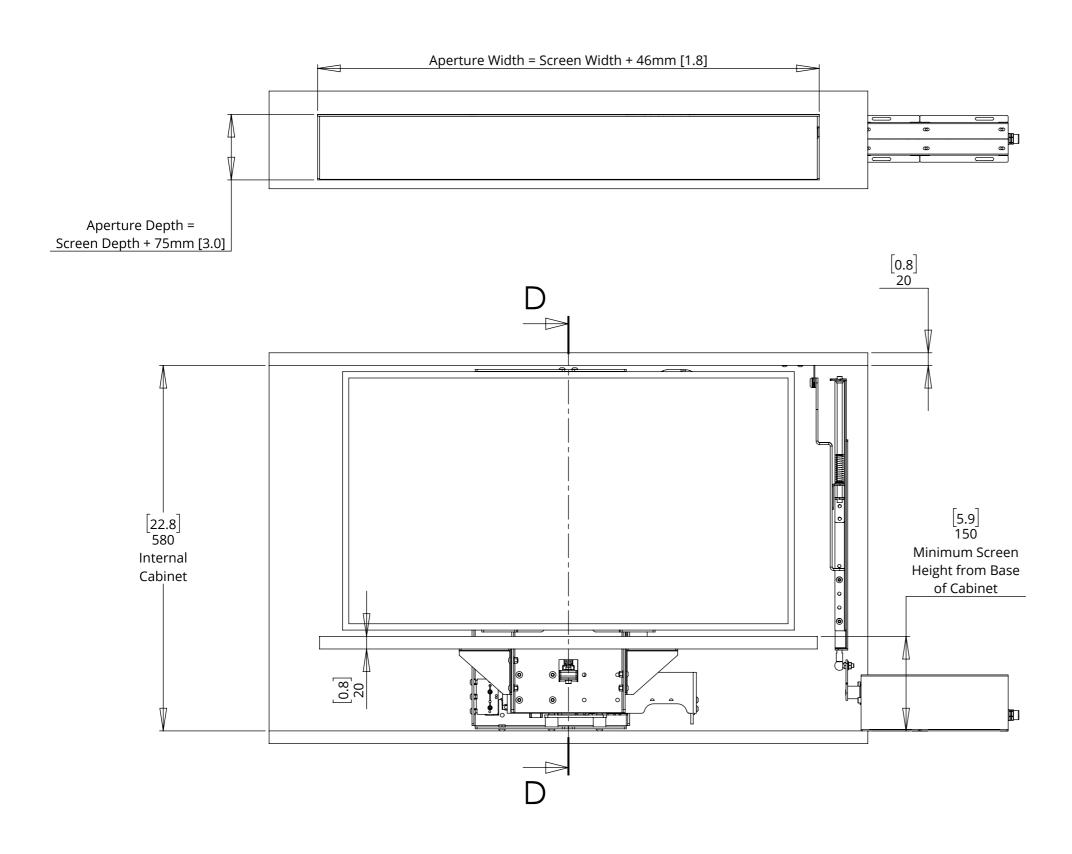

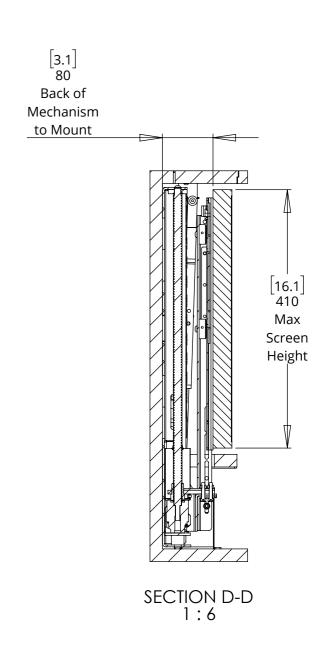

SHEET 5



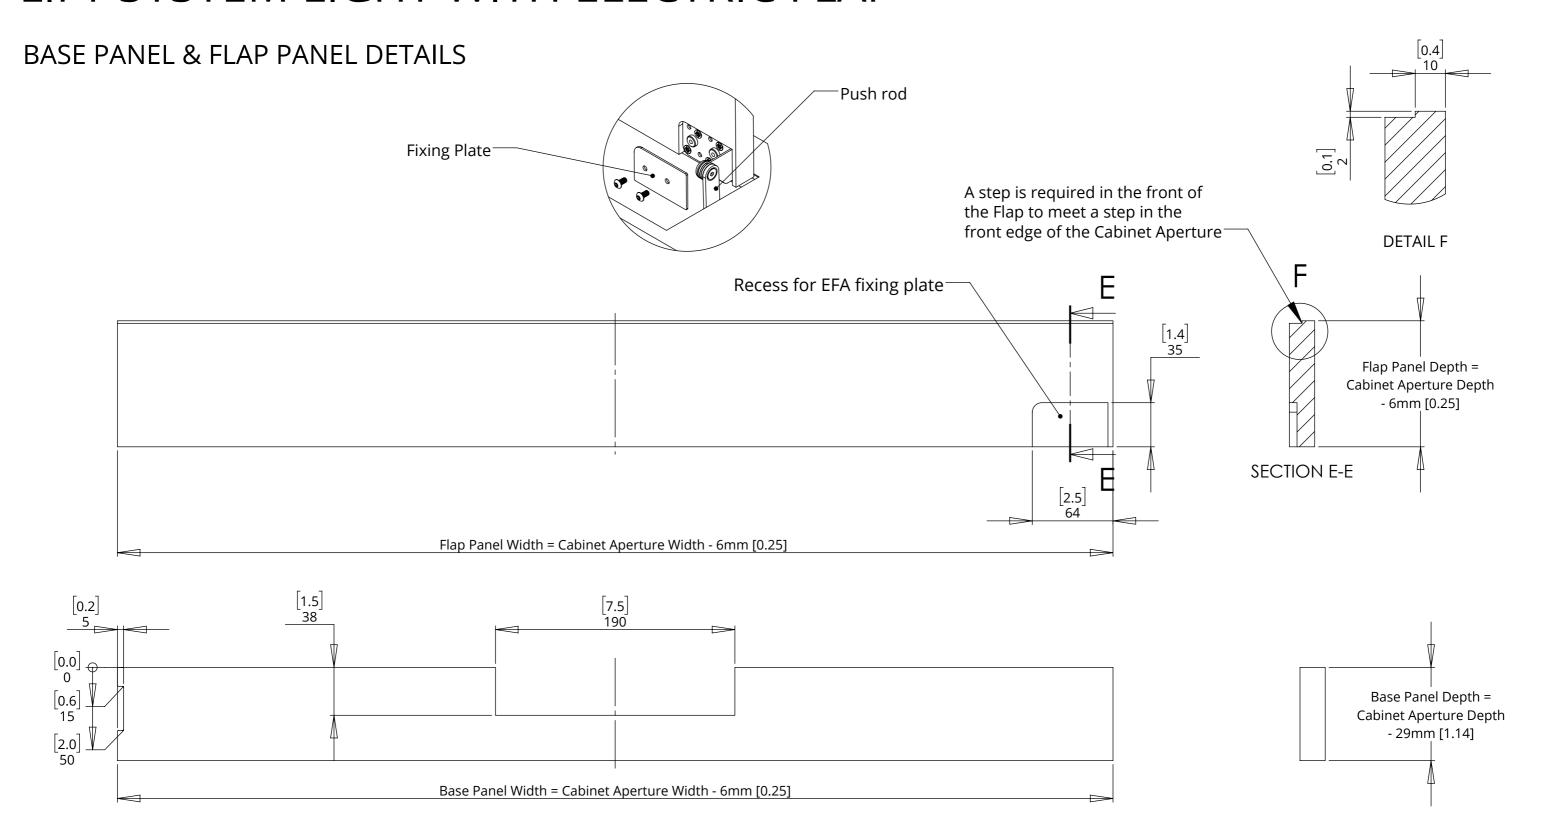




[13.8] 350

#### POSITIONING THE EFA TO ACCOMADATE SMALLER SCREENS

A Base Panel of less than 1050mm [41.3] wide will cause the EFA to interfere with the LSL beam.


This can be avoided by orientating the EFA away from the LSL. It will however require more space for the EFA to be positioned to the side of the cabinet.

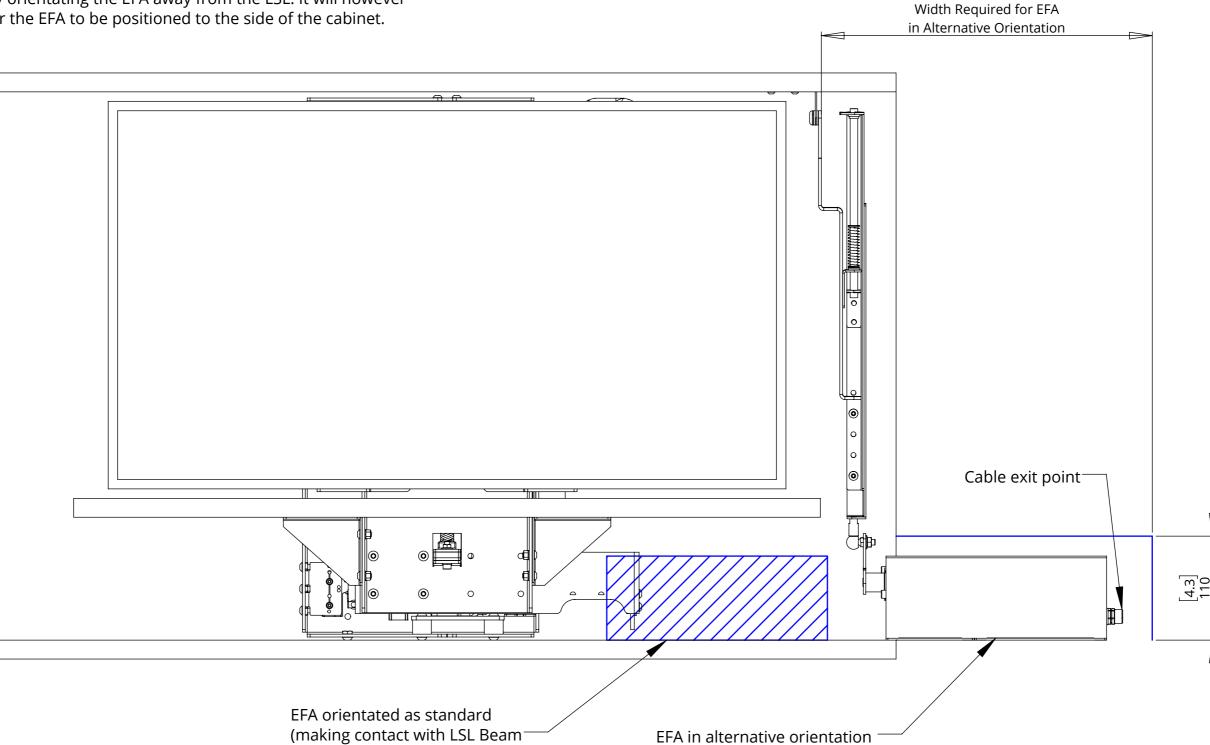



future automation





#### **MECHANISM UP**

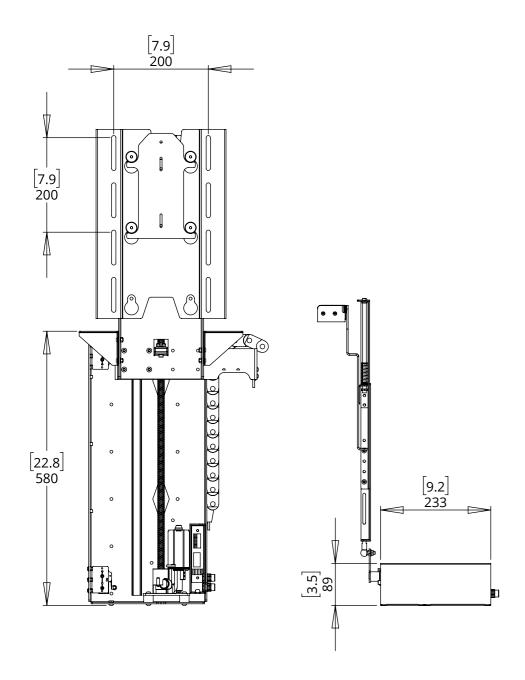

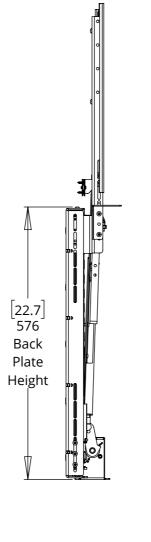

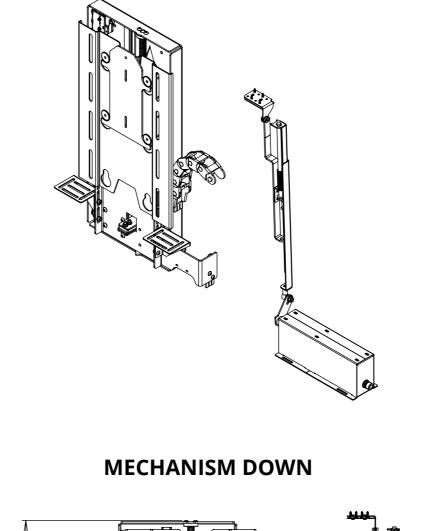

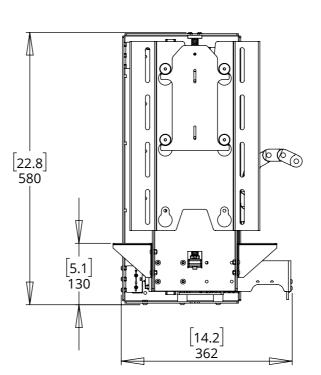

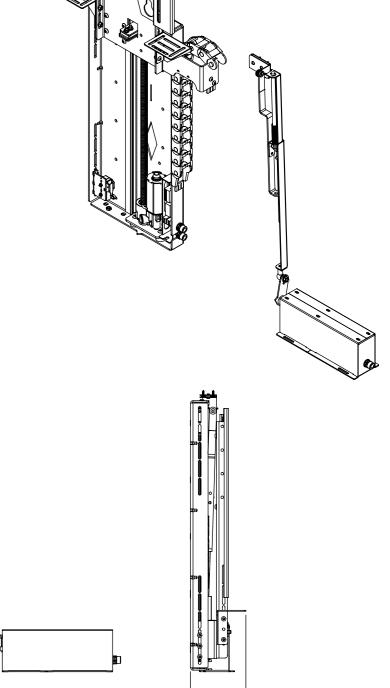

TECHNICAL SHEET
ISSUE 005
SHEET 8

4.6

**UK** +44 (0) 1438 833577 **US** +1 (603) 742 9181

www.FUTUREAUTOMATION.NET