

PCS6.5

Pendant Ceiling Speaker


INTENDED USE

- ✓ Indoor Applications: Restaurants, Offices, Auditoriums, Gymnasiums and more
- ✓ Outdoor Applications: Atriums, Pool Side, Sun Rooms, Patios, Backyards and more
- ✓ Contractors, Custom Installers & Retailers
- ✓ Marine and RV Compatible



SPECIFICATIONS:

Frequency Range (-3dB)	40 Hz - 20 kHz
Frequency Response (-10dB)	30 Hz - 22 kHz
Sensitivity (1W/1M)	90 dB
Power Handling	20 - 40 WRMS
Nominal Impedance	8-Ohms
Transformer Taps	8 Ohms 25V: 2.5W/1.3W/0.7W/0.4W/0.2W 70V: 20W/10W/5W/2.5W/1.3W 100V: 20W/10W/5W/2.5W
Woofers	6.5" Polypropylene
Tweeter	1" Aluminum Dome
Finish	Matte Black Paintable

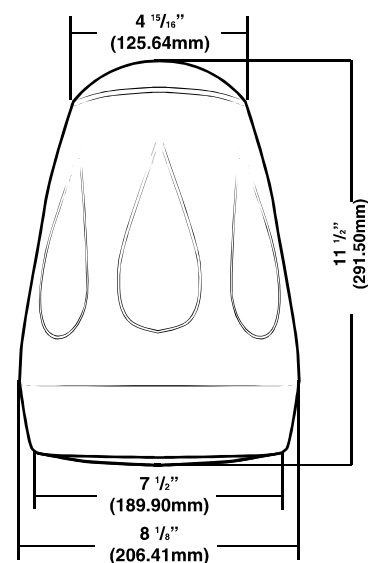

**EARTHQUAKE
EARTHQUAKE**
SOUND
The Sound That Will Move You