LSL-BE/PF 1
LIFT SYSTEM FOR BOX ENCLOSURE/PUSH FLAP

future automation

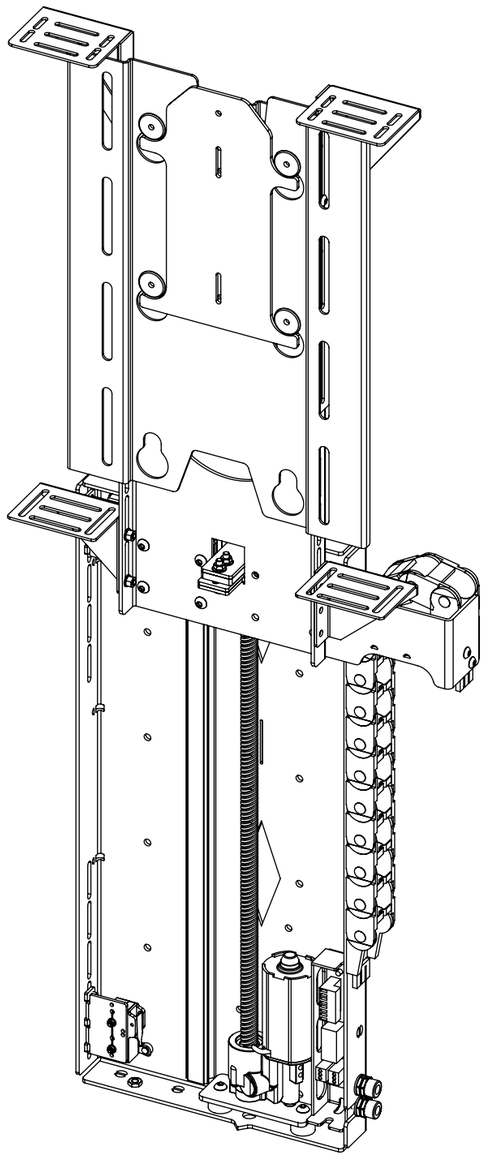

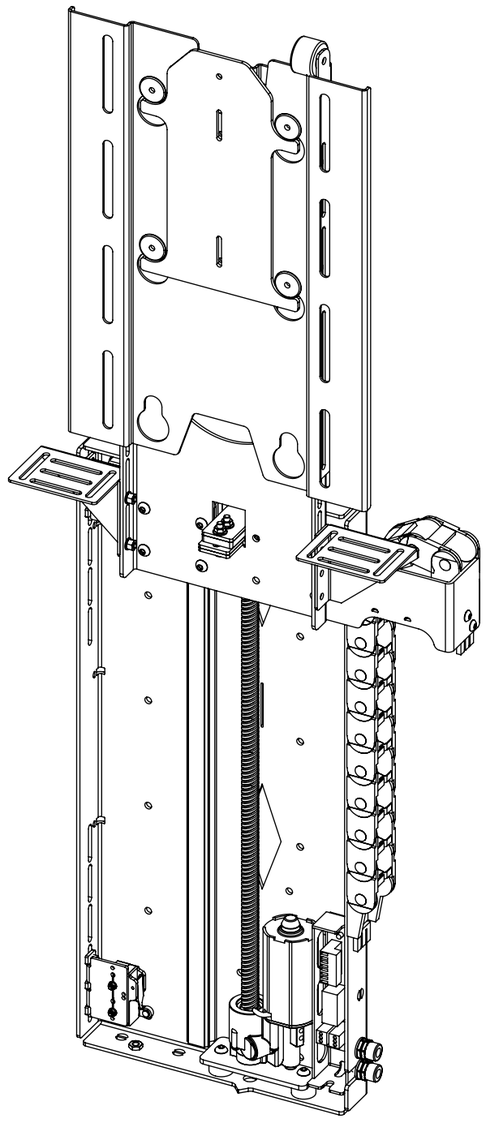

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

TECHNICAL SHEET
ISSUE 003
SHEET 1

LSL-BE/PF 1
LIFT SYSTEM FOR BOX ENCLOSURE/PUSH FLAP

future automation

SPECIFICATION	MEASUREMENTS
Screen Sizes (Approx)	19" - 32"
Maximum Weight Capacity	25Kg (55lb)
Maximum Weight Capacity (Marine)	16Kg (35lb)
Maximum Screen Height	410mm (16.14")
Packaging Dimensions	920mm (36.2") x 550mm (21.7") x 250mm (9.8")
Shipping Weight	15Kg (33lb)
Movement Type	Motorised
Power Supply Required	110V or 240V AC
Power Consumption	250-500W
Power Consumption Standby	3W
Decibel Rating	58dB
Mounting Patterns Supported	VESA 200 W x 300, 200 H
Control Options	IR Remote, RS232, Contact Closure
Product Options / Features	Specific B&O and Loewe mounts / adapters, Custom RAL paint finishes, Outdoor version
Package Contents	Mechanism, IR remote control, Push Flap Kit, Box Enclosure Kit
Marine Suitable	Yes (Indoor)

LSL-BE/PF 1
LIFT SYSTEM FOR BOX ENCLOSURE/PUSH FLAP

future automation

CABLE ROUTING

Screen cables are routed behind the Base Panel and out the right side of the Beam into the Cable Track. Cables must be routed carefully to prevent any interference with the LSL beam as it operates.

Screen and Mechanism cables should be routed to a control box in the bottom of the cabinet.

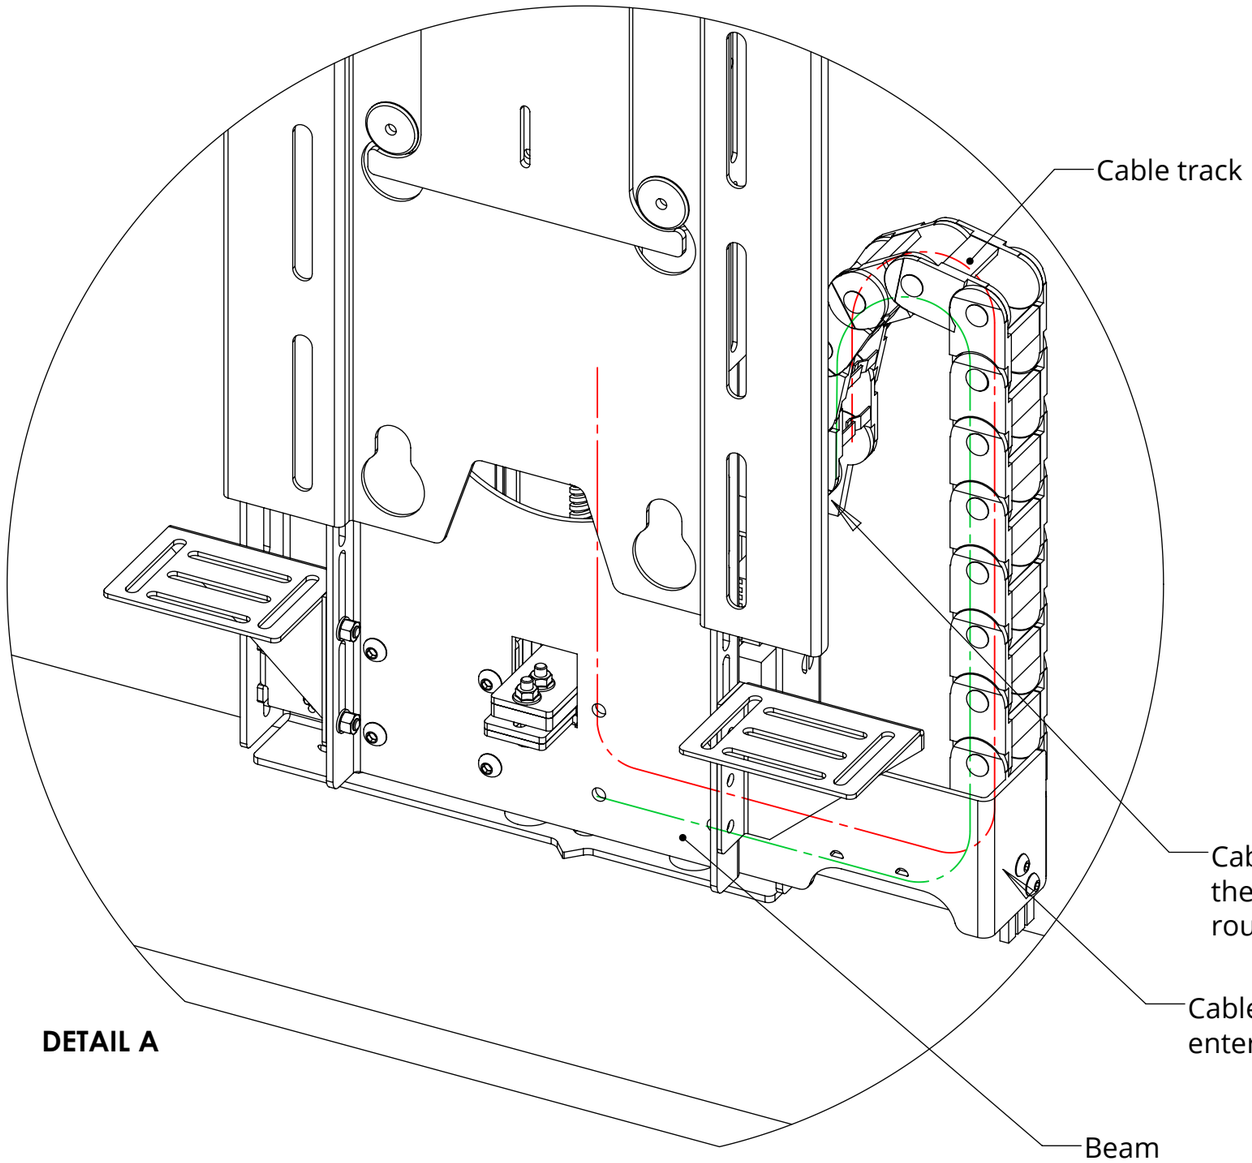

DETAIL A

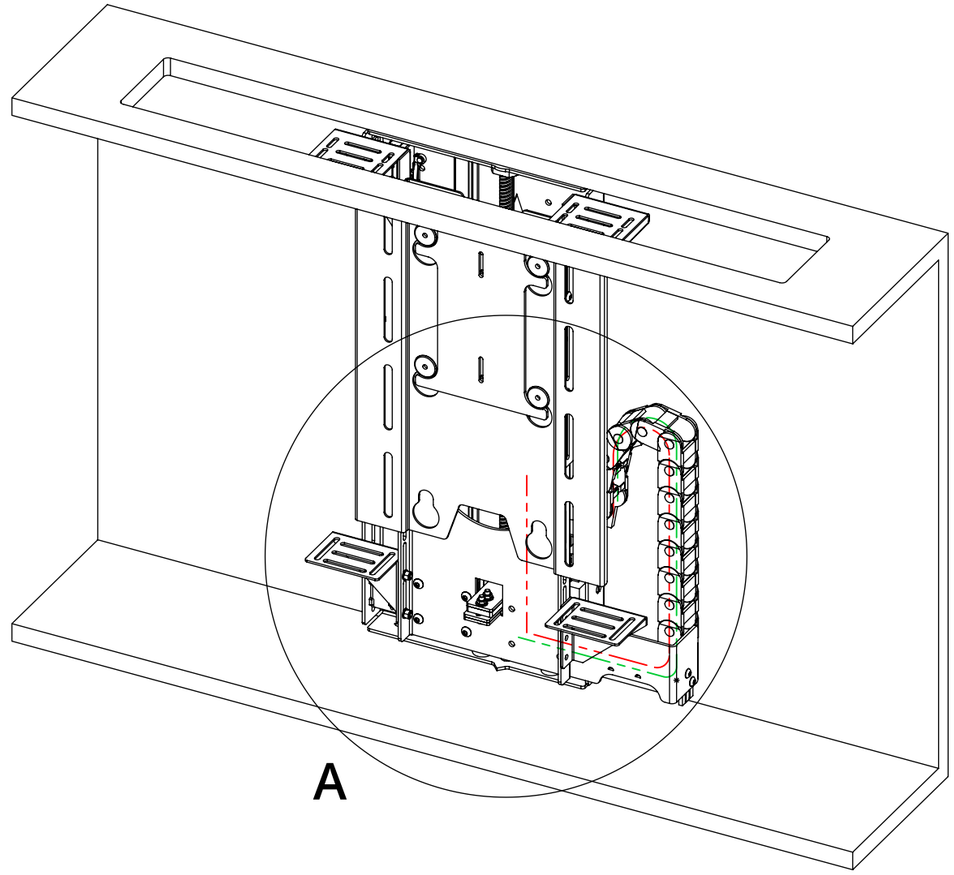

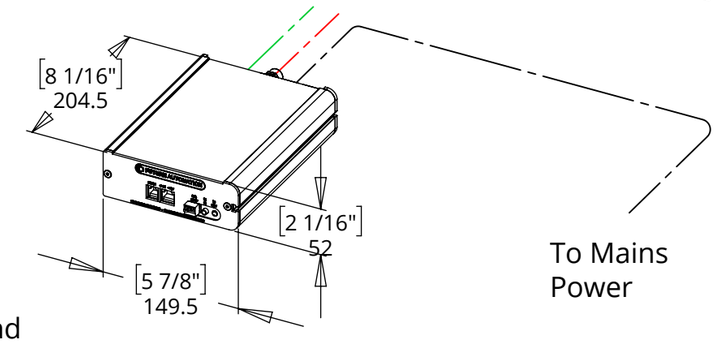

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

TECHNICAL SHEET
ISSUE 003
SHEET 3

LSL-BE/PF 1
LIFT SYSTEM FOR BOX ENCLOSURE/PUSH FLAP

LSL-BE 1 - MECHANISM UP - IN CABINET

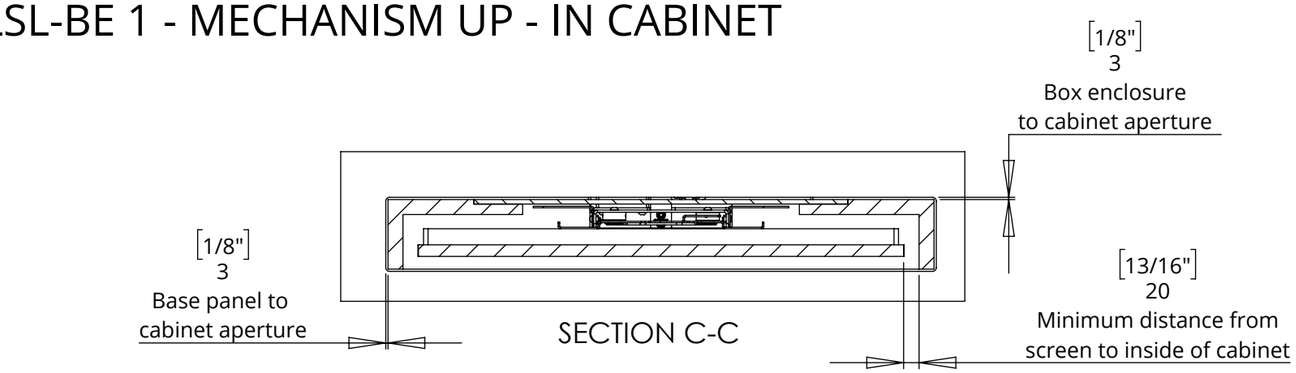

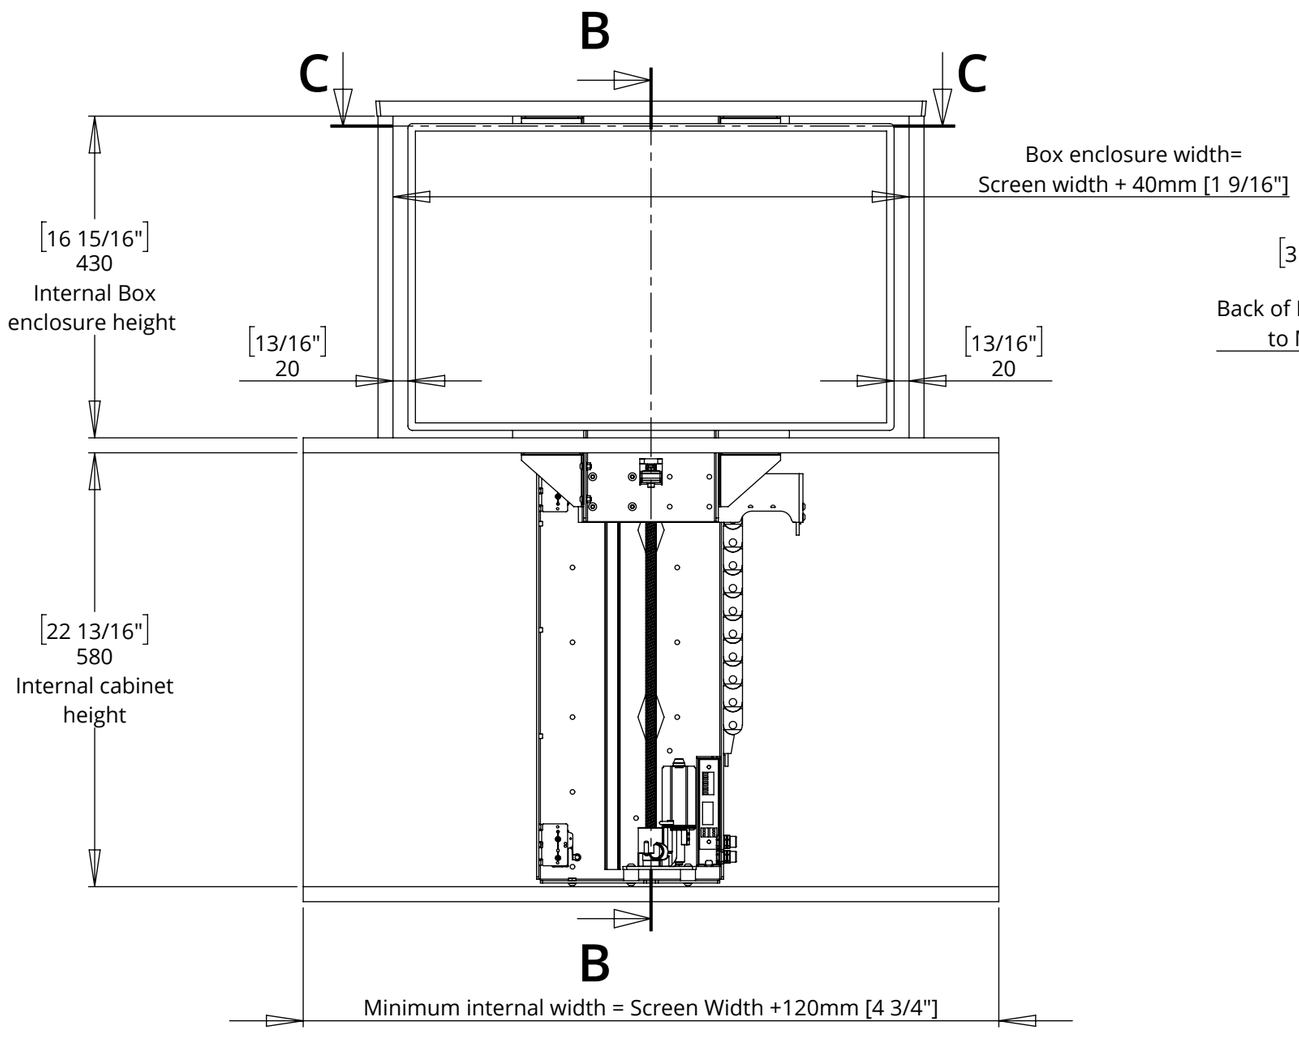

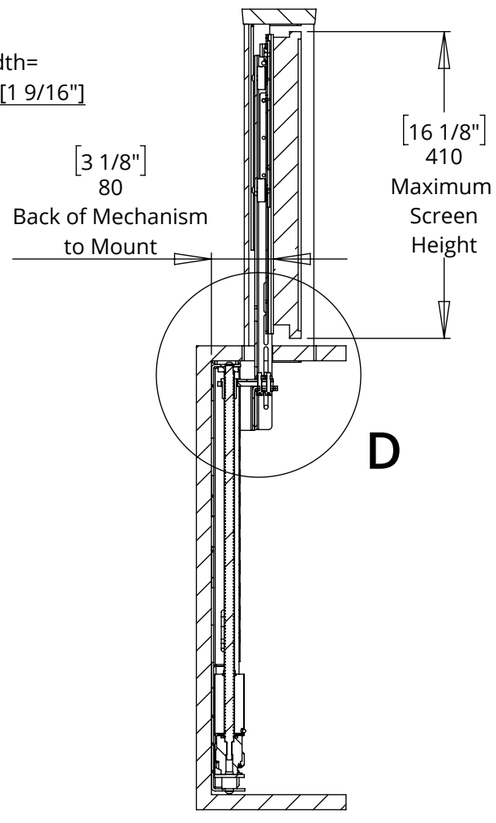

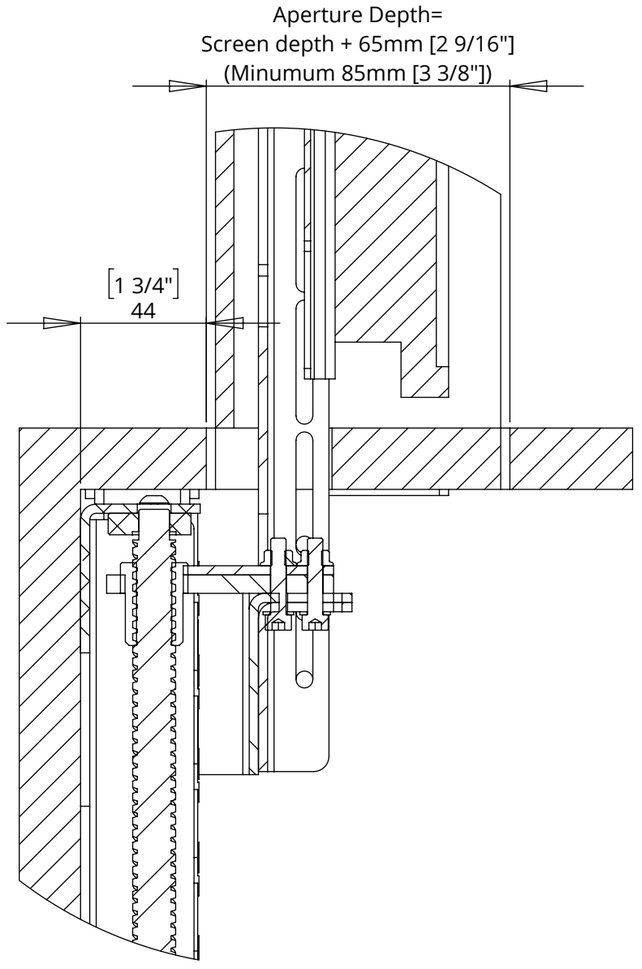

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

TECHNICAL SHEET
ISSUE 003
SHEET 4

LSL-BE/PF 1
LIFT SYSTEM FOR BOX ENCLOSURE/PUSH FLAP

LSL-BE 1 - MECHANISM DOWN - IN CABINET

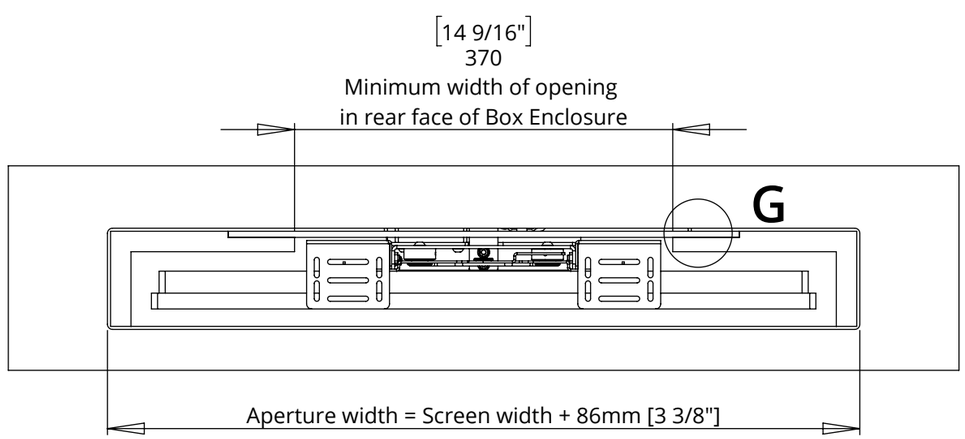

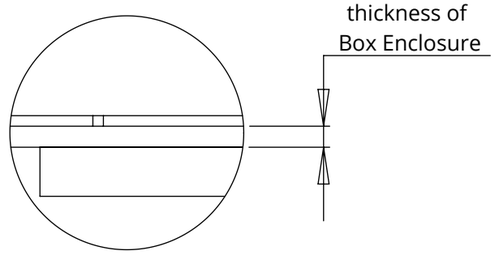

DETAIL G

Shown with a tapered Box Enclosure
Lid in a square Cabinet Aperture.

A tapered Cabinet Aperture can be used to improve the fit

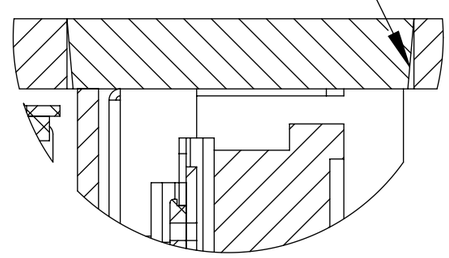

DETAIL F

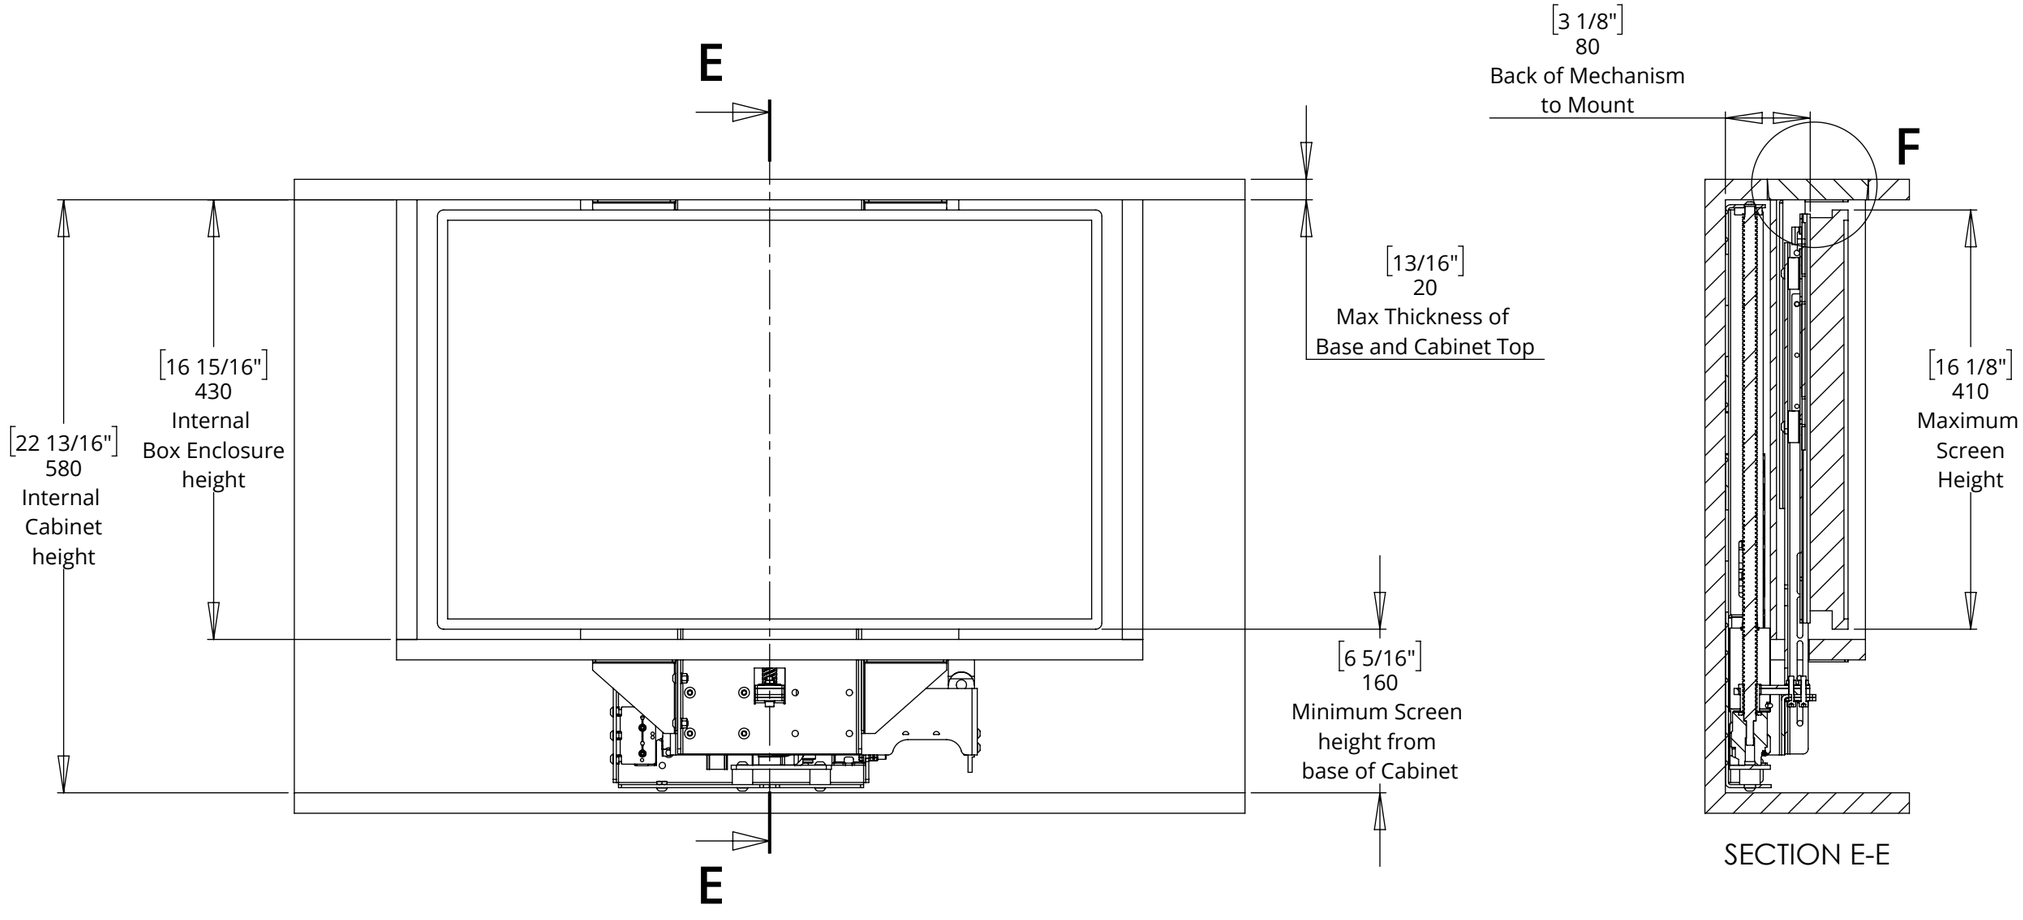

SECTION E-E

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

TECHNICAL SHEET
ISSUE 003
SHEET 5

LSL-BE/PF 1
LIFT SYSTEM FOR BOX ENCLOSURE/PUSH FLAP

LSL-BE 1 - BASE PANEL & LID DETAILS

NOTE: A tapered Box Enclosure Lid creates a good fit in the Cabinet Aperture and helps theBox Enclosure to locate within the Cabinet.

BOX ENCLOSURE LID (TAPERED) - TOP VIEW

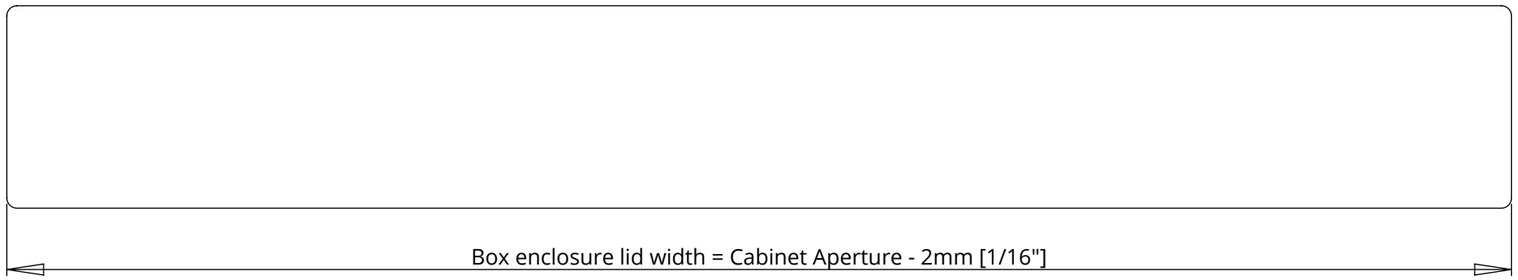

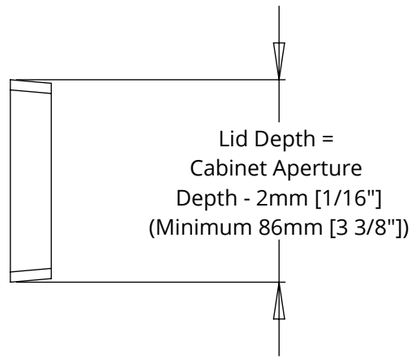

BASE PANEL - TOP VIEW

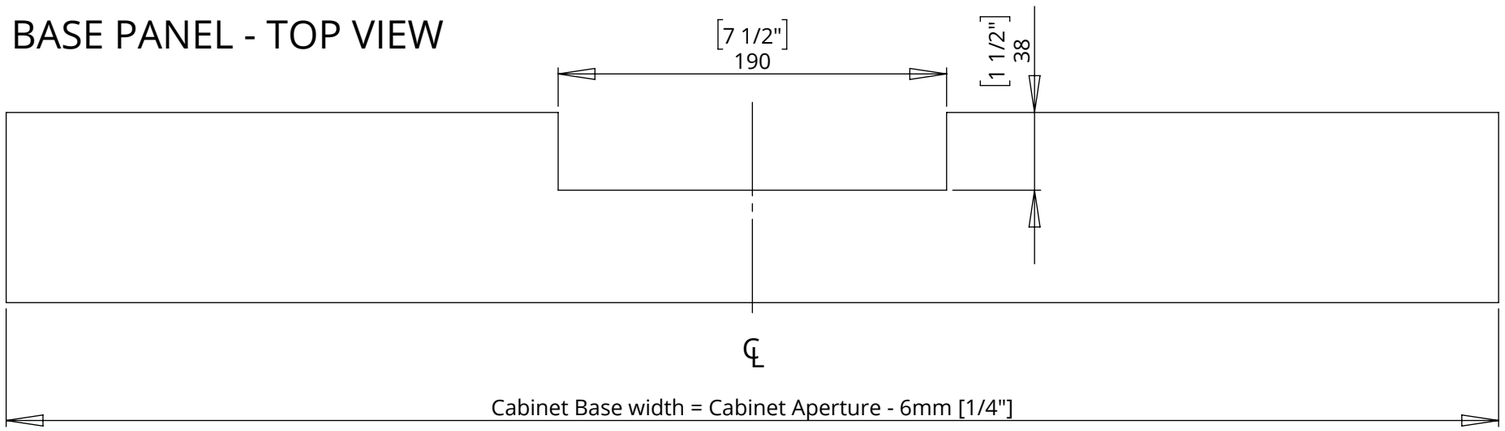

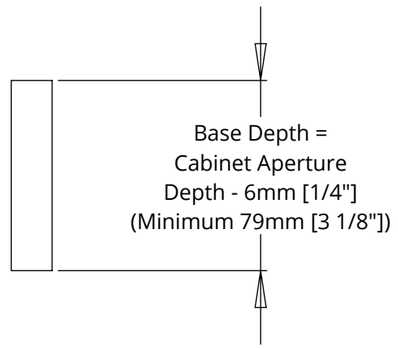

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

TECHNICAL SHEET
ISSUE 003
SHEET 6

LSL-BE/PF 1
LIFT SYSTEM FOR BOX ENCLOSURE/PUSH FLAP

LSL-PF 1 - MECHANISM UP - IN CABINET

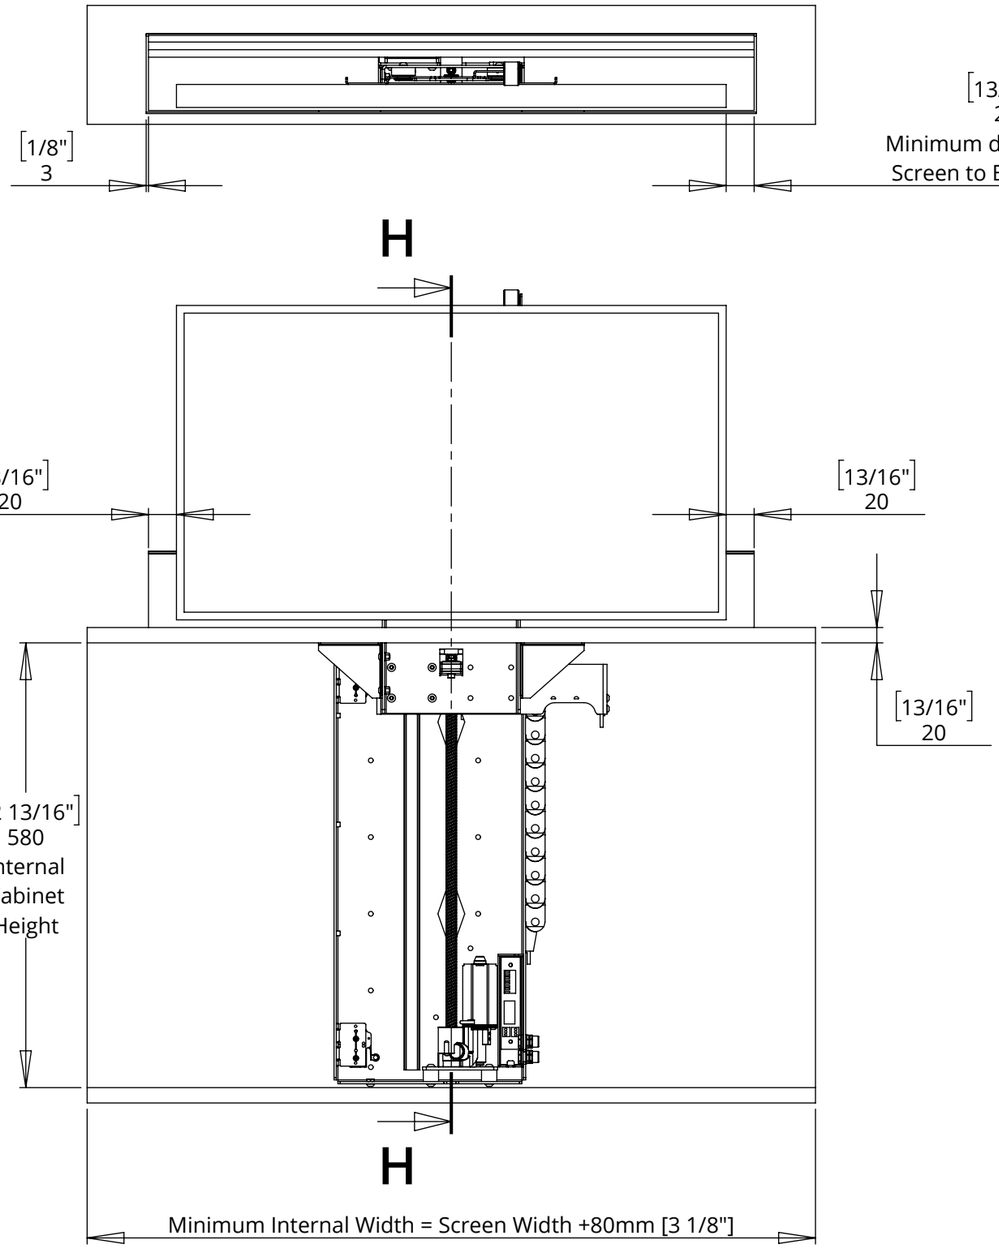

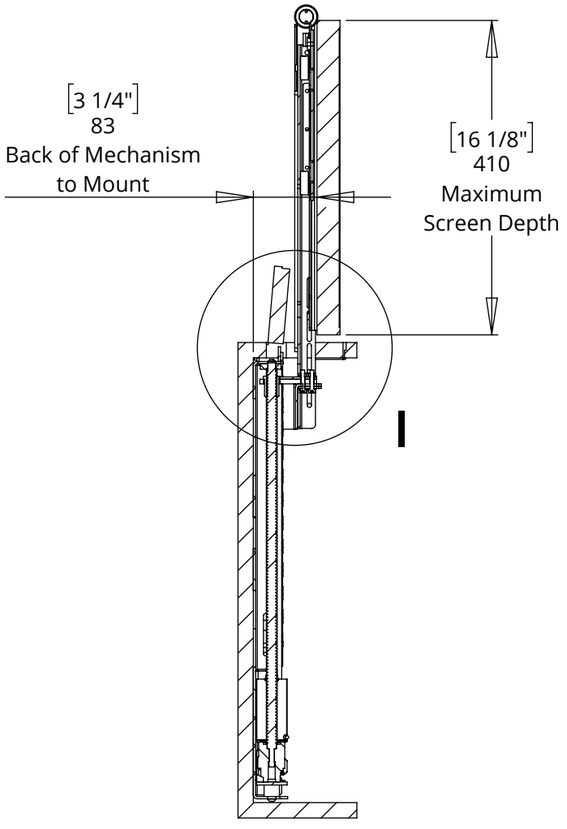

SECTION H-H

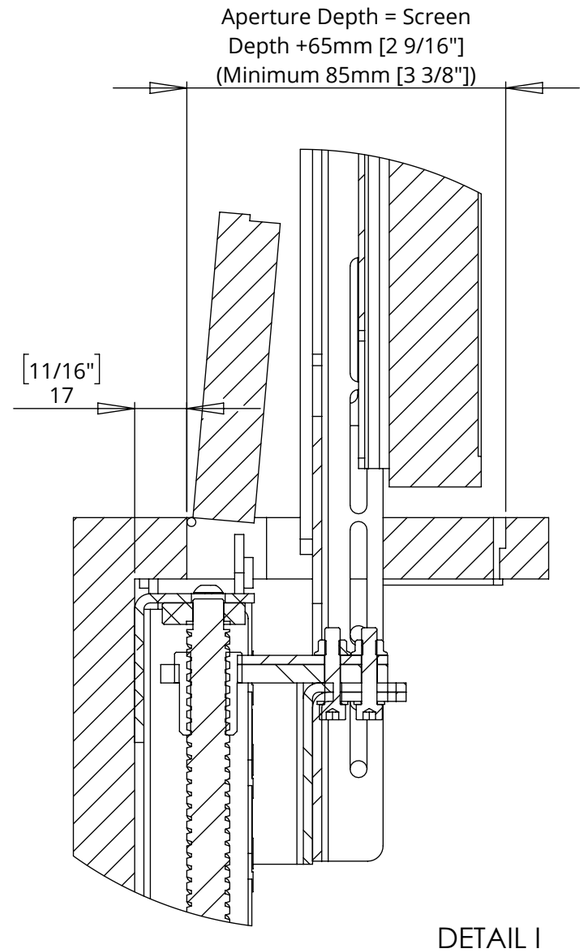

DETAIL I

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

LSL-BE/PF 1
LIFT SYSTEM FOR BOX ENCLOSURE/PUSH FLAP

LSL-PF 1 - MECHANISM DOWN - IN CABINET

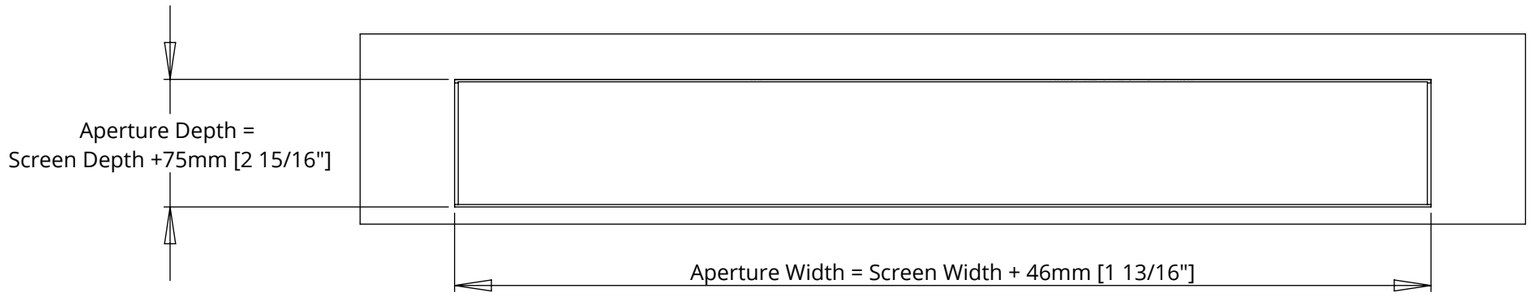

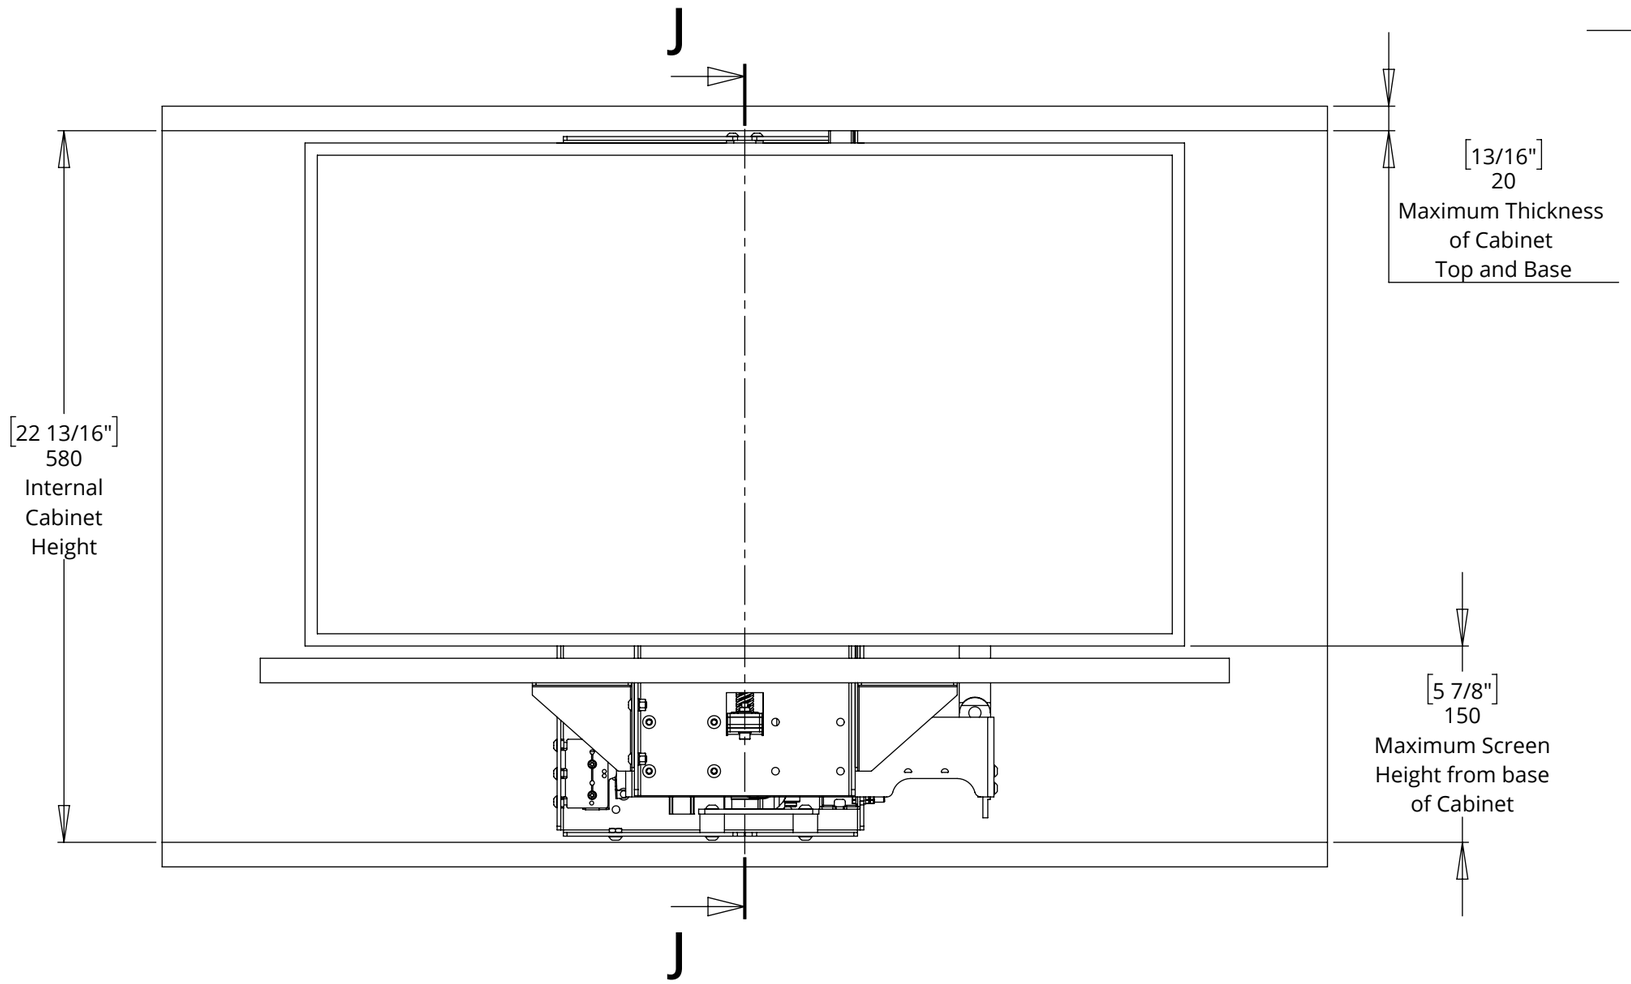

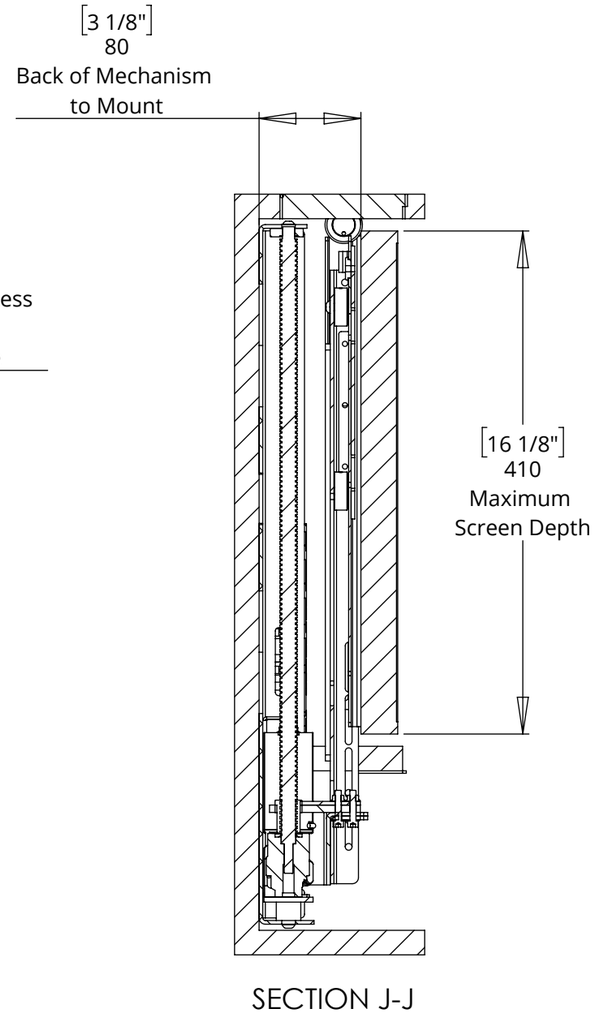

SECTION J-J

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

TECHNICAL SHEET
ISSUE 003
SHEET 8

LSL-BE/PF 1
LIFT SYSTEM FOR BOX ENCLOSURE/PUSH FLAP

LSL-PF 1 - BASE PANEL & FLAP DETAILS

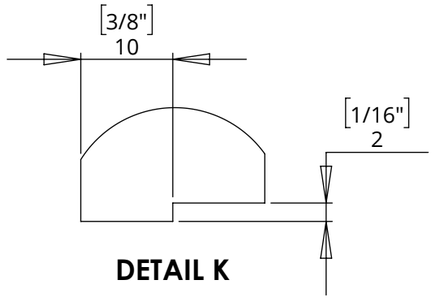

DETAIL K

FLAP PANEL - TOP VIEW

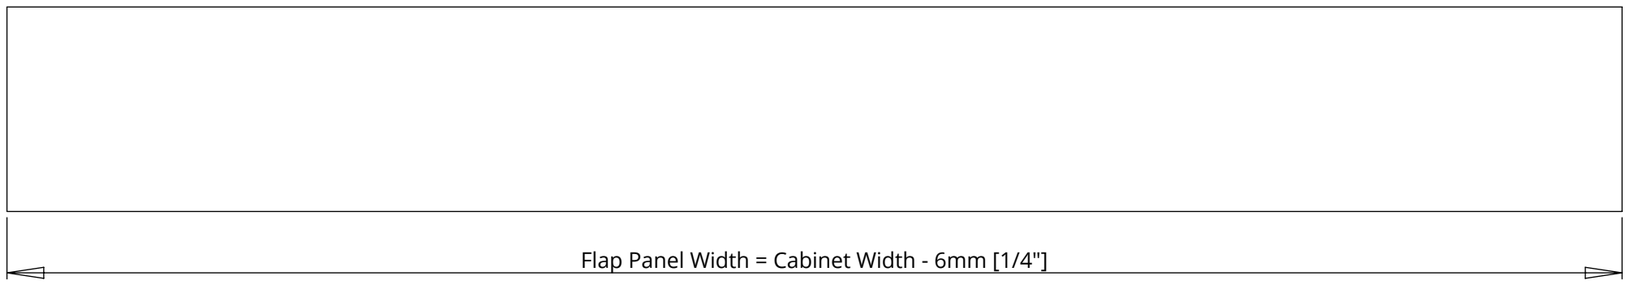

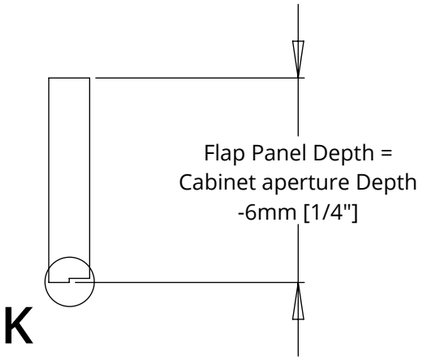

BASE PANEL - TOP VIEW

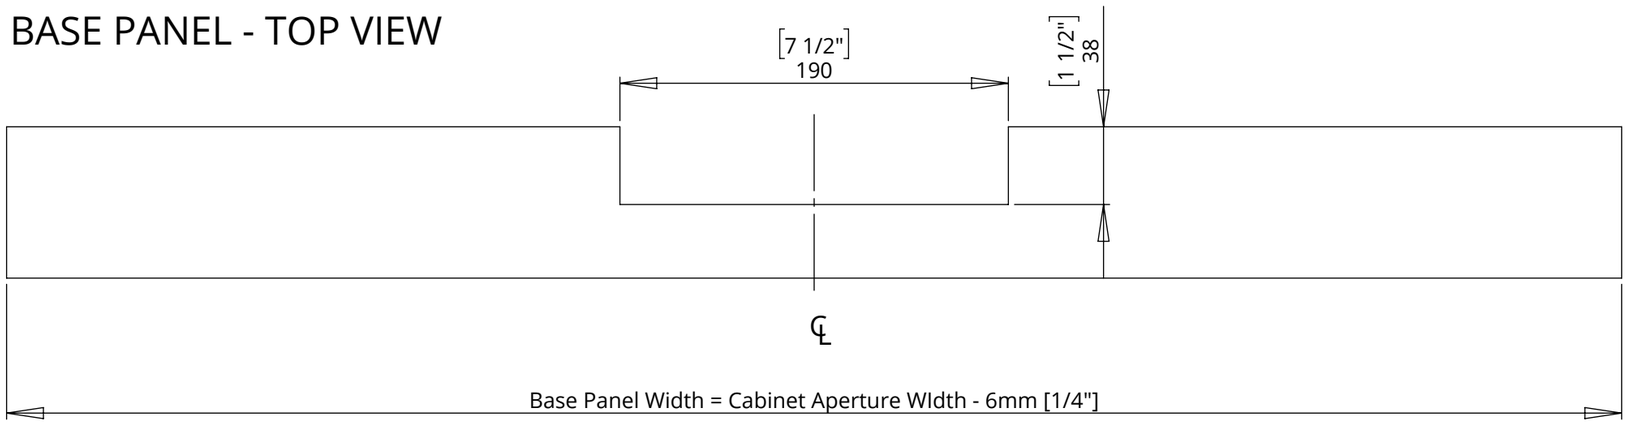

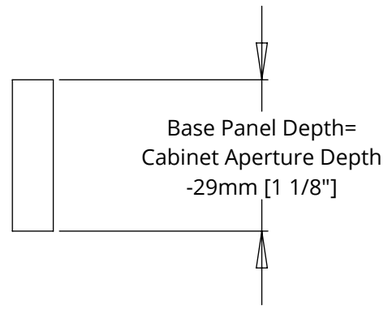

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

TECHNICAL SHEET
ISSUE 003
SHEET 9

LSL-BE/PF 1
LIFT SYSTEM FOR BOX ENCLOSURE/PUSH FLAP

MECHANISM INSTALATION OVERVIEW

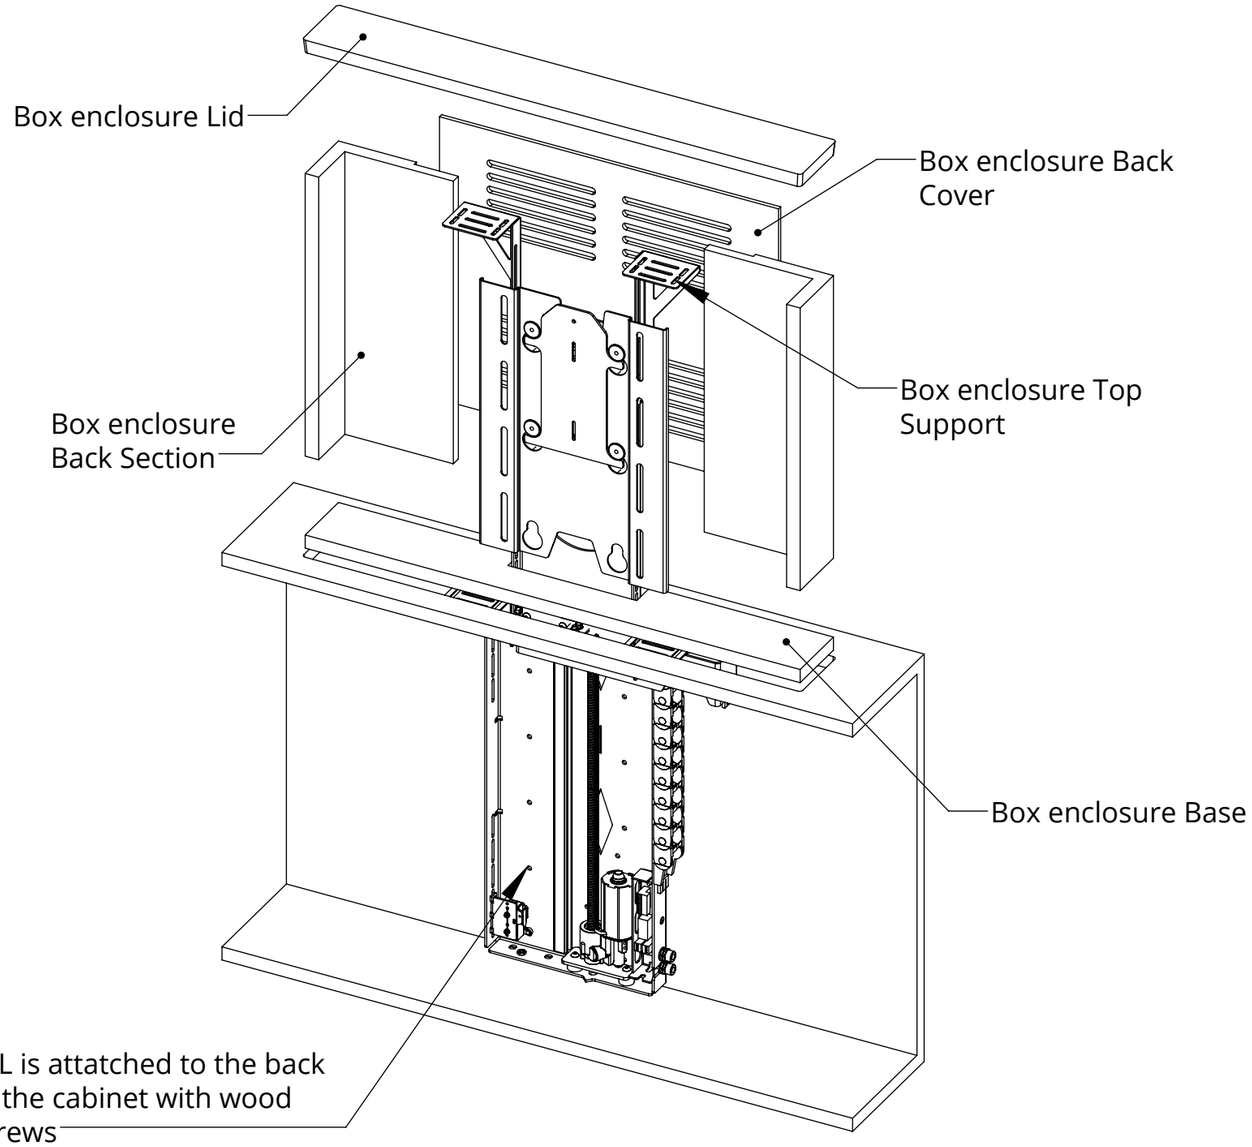

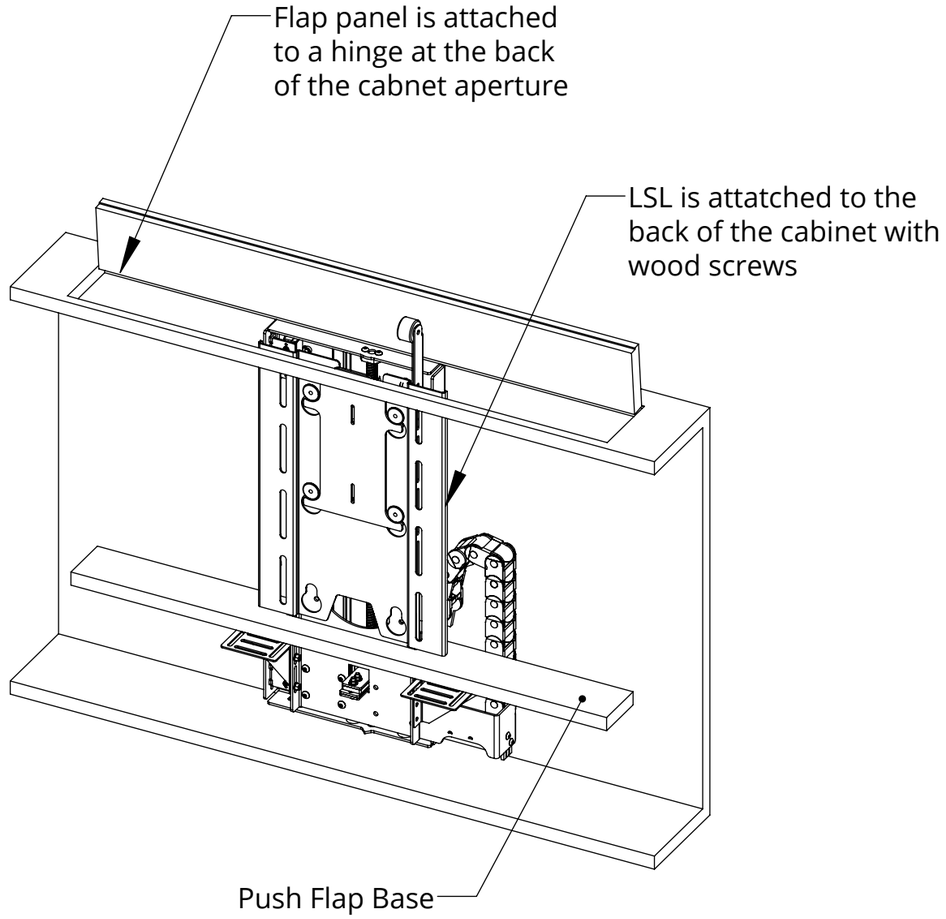

LSL-BE/PF 1
LIFT SYSTEM FOR BOX ENCLOSURE/PUSH FLAP

OVERALL MECHANISM DIMENTIONS

MECHANISM UP

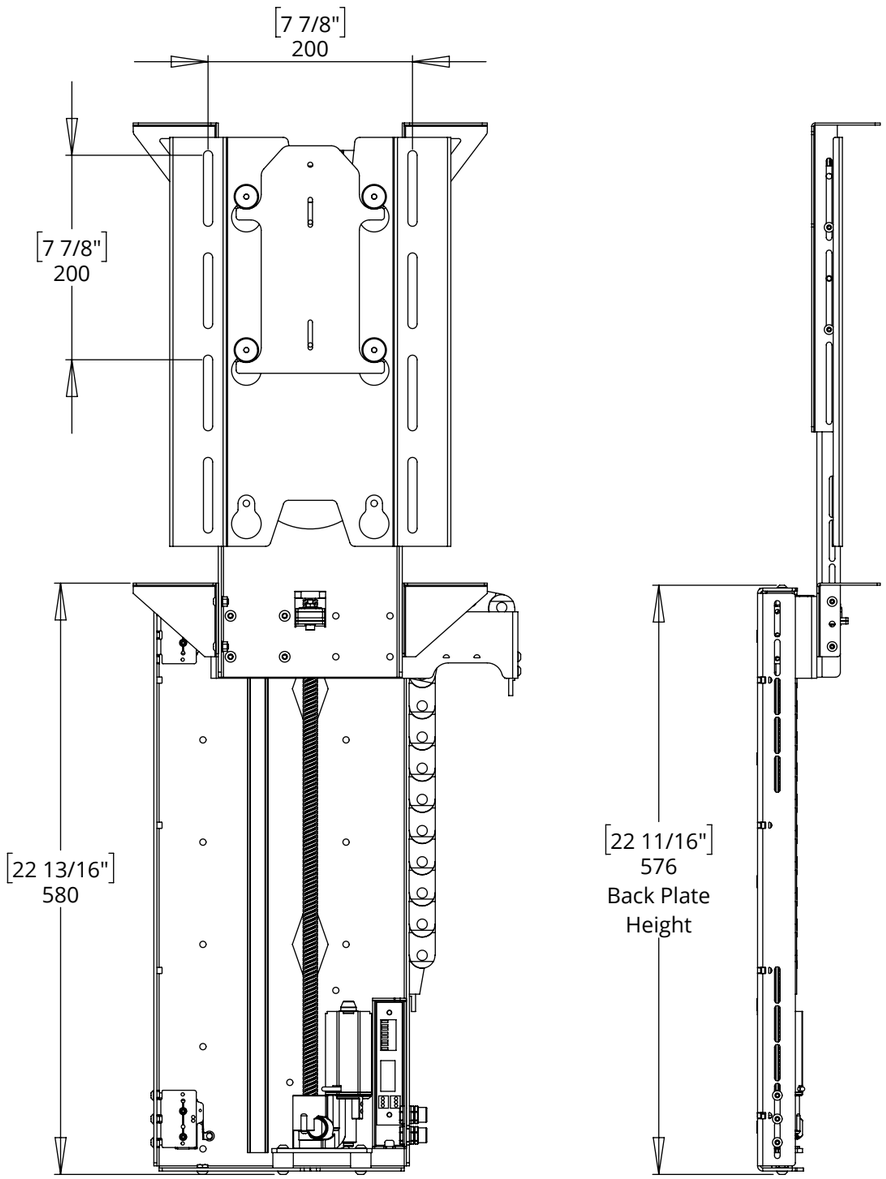

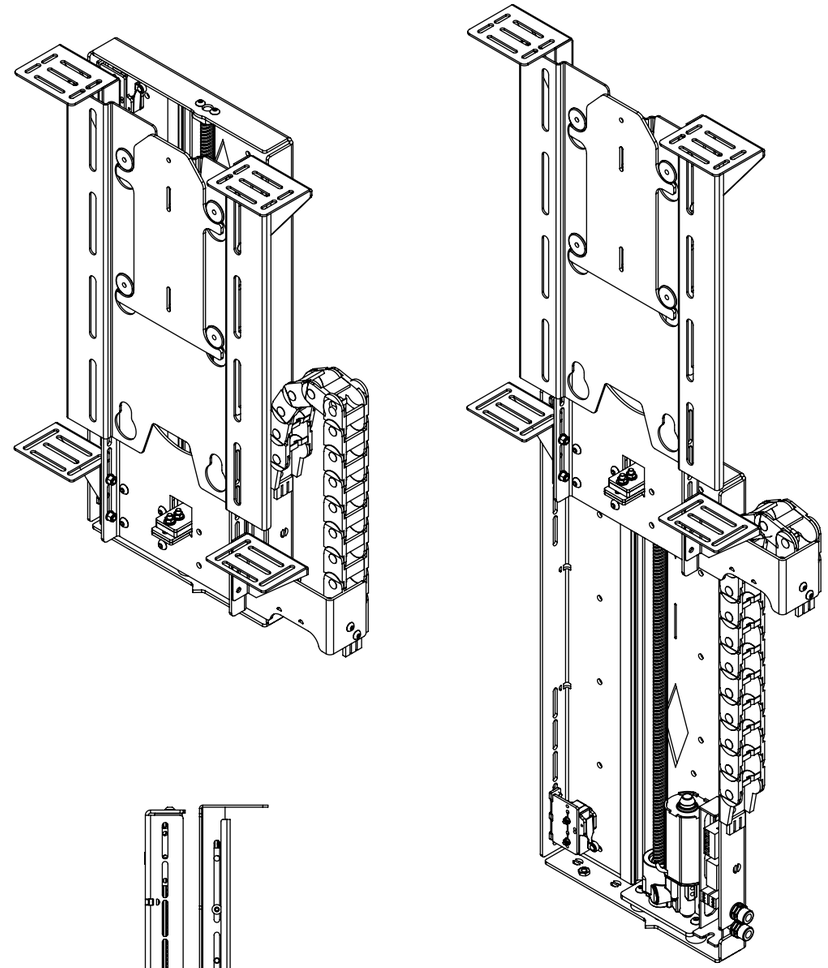

MECHANISM DOWN

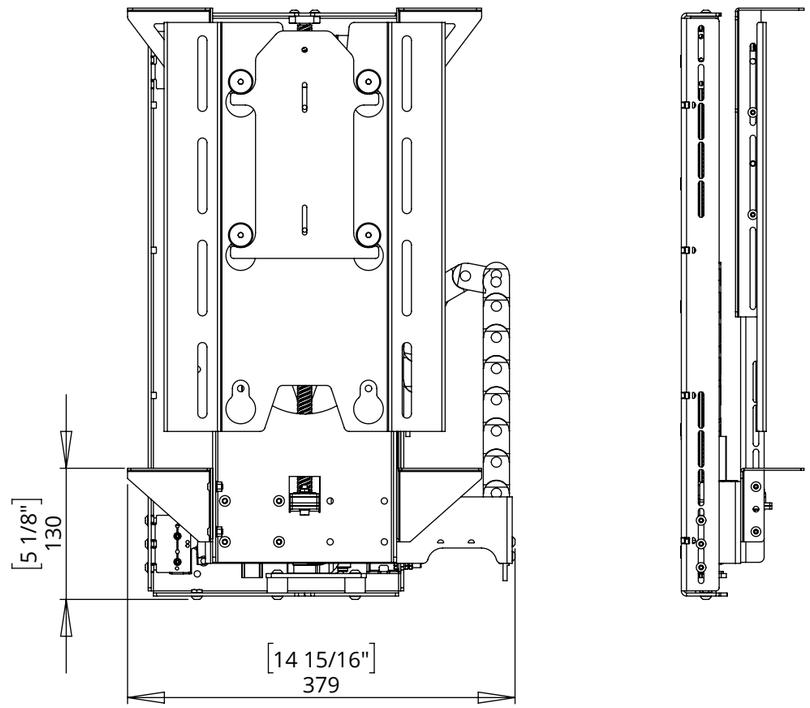

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

TECHNICAL SHEET
ISSUE 003
SHEET 11