

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181 www.**FUTUREAUTOMATION**.NET

fa future automation





SPECIFICATION	MEASUREMENTS		
Maximum Screen Height	800mm (31 1/2")		
Maximum Lifting Capacity	50Kg (110lb)		
Maximum Lifting Capacity (Marine)	30Kg (66lb)		
Internal Cabinet Height	950mm (37 3/8")		
Decibel Rating	52 dB		
Packaging Dimensions	1150 x 850 x 330mm (45 1/4" x 33 7/16 x 13")		
Shipping Weight	35Kg (77lb)		
Movement Type	Motorised		
Power Supply Required	110V - 240V AC		
Power Consumption	250 - 500W		
Power Consumption Standby	3W		
Mounting Patterns Supported	VESA 400, 300, 200 W x 400, 300, 200 H		
Control Options	IR Remote, RS232, Contact Closure, RF Available		
Product Options / Features	Specific B&O and Loewe mounts / adapters, Custom RAL paint finishes		
Package Contents	Mechanism, IR remote control, Push Flap Kit, Box Enclosure Kit		
Marine Suitable	Yes		


future automation




CABLE ROUTING


The LSM has an easily removable Mount Cover that cables from the screen can be routed underneath. Cables then travel through the centre of the Mount Boss and into the beam. Cables must be routed carefully to prevent any interference with the LSM beam as it operates.

Screen and Mechanism cables should be routed to a control box outside of the cabinet via an opening in the back of the cabinet or a conduit leading to the bottom.

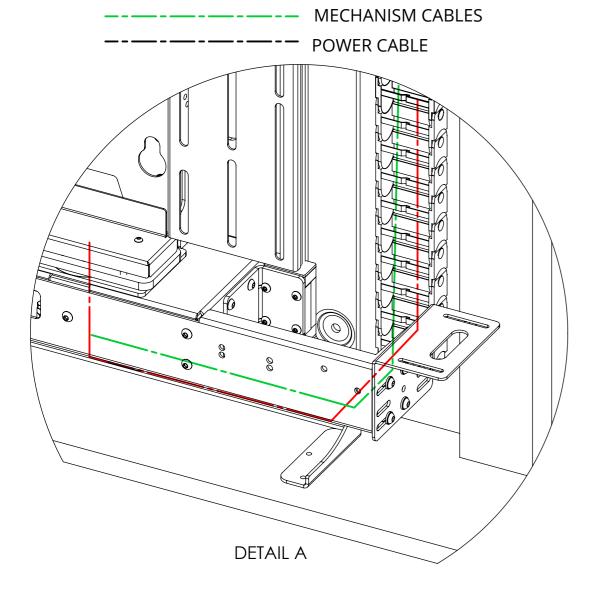


SCREEN CABLES

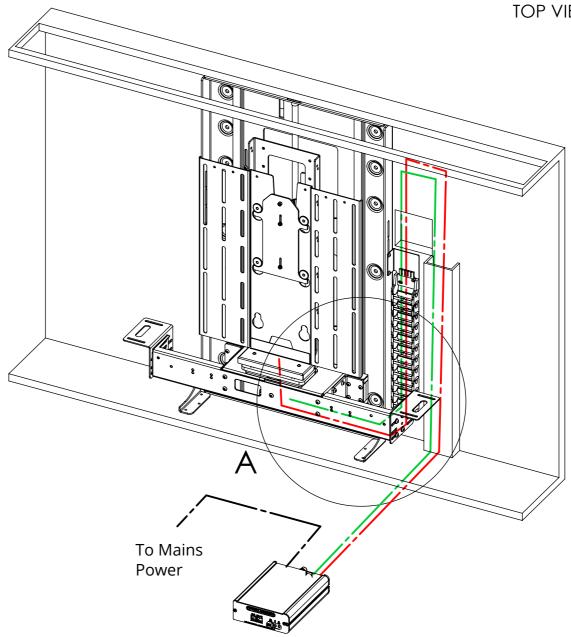






future automation

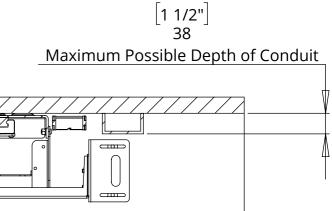





LSM-BE 6 - MECHANISM UP - IN CABINET

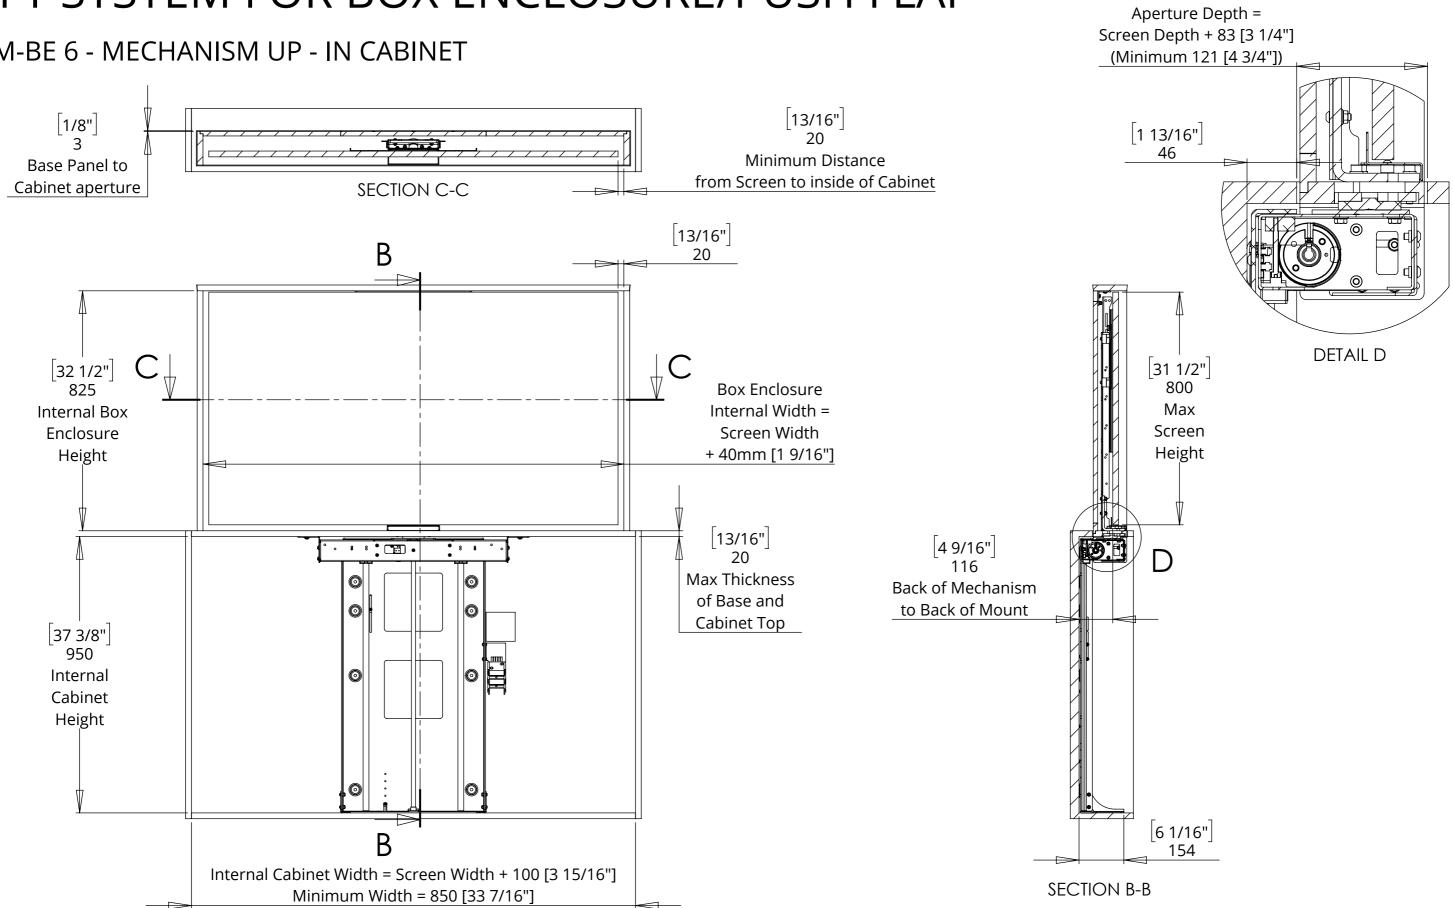

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181 WWW.FUTUREAUTOMATION.NET


future automation fa








Shown with tapered Box Enclosure Lid in square Cabinet Aperture. A tapered Cabinet Aperture can be used to improve the fit.

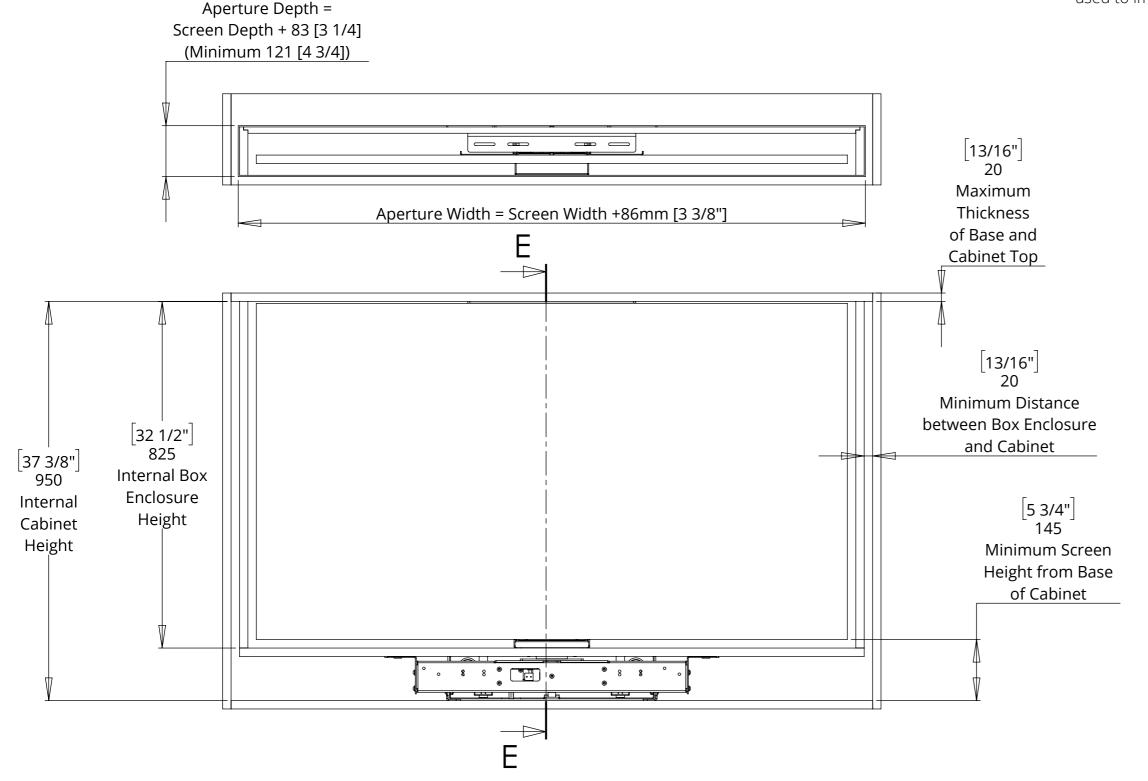

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181 www.**FUTUREAUTOMATION**.NET


future automation

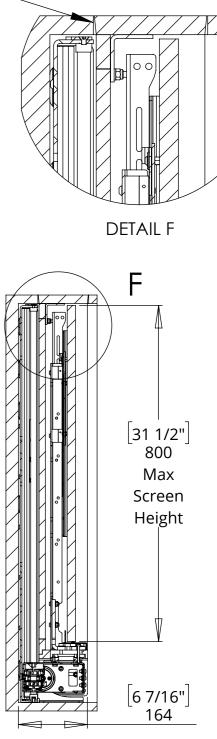

SECTION E-E

TECHNICAL SHEET ISSUE 013 SHEET 5

LSM-BE/PF 6 LIFT SYSTEM FOR BOX ENCLOSURE/PUSH FLAP BOX ENCLOSURE BASE PANEL AND LID DETAILS

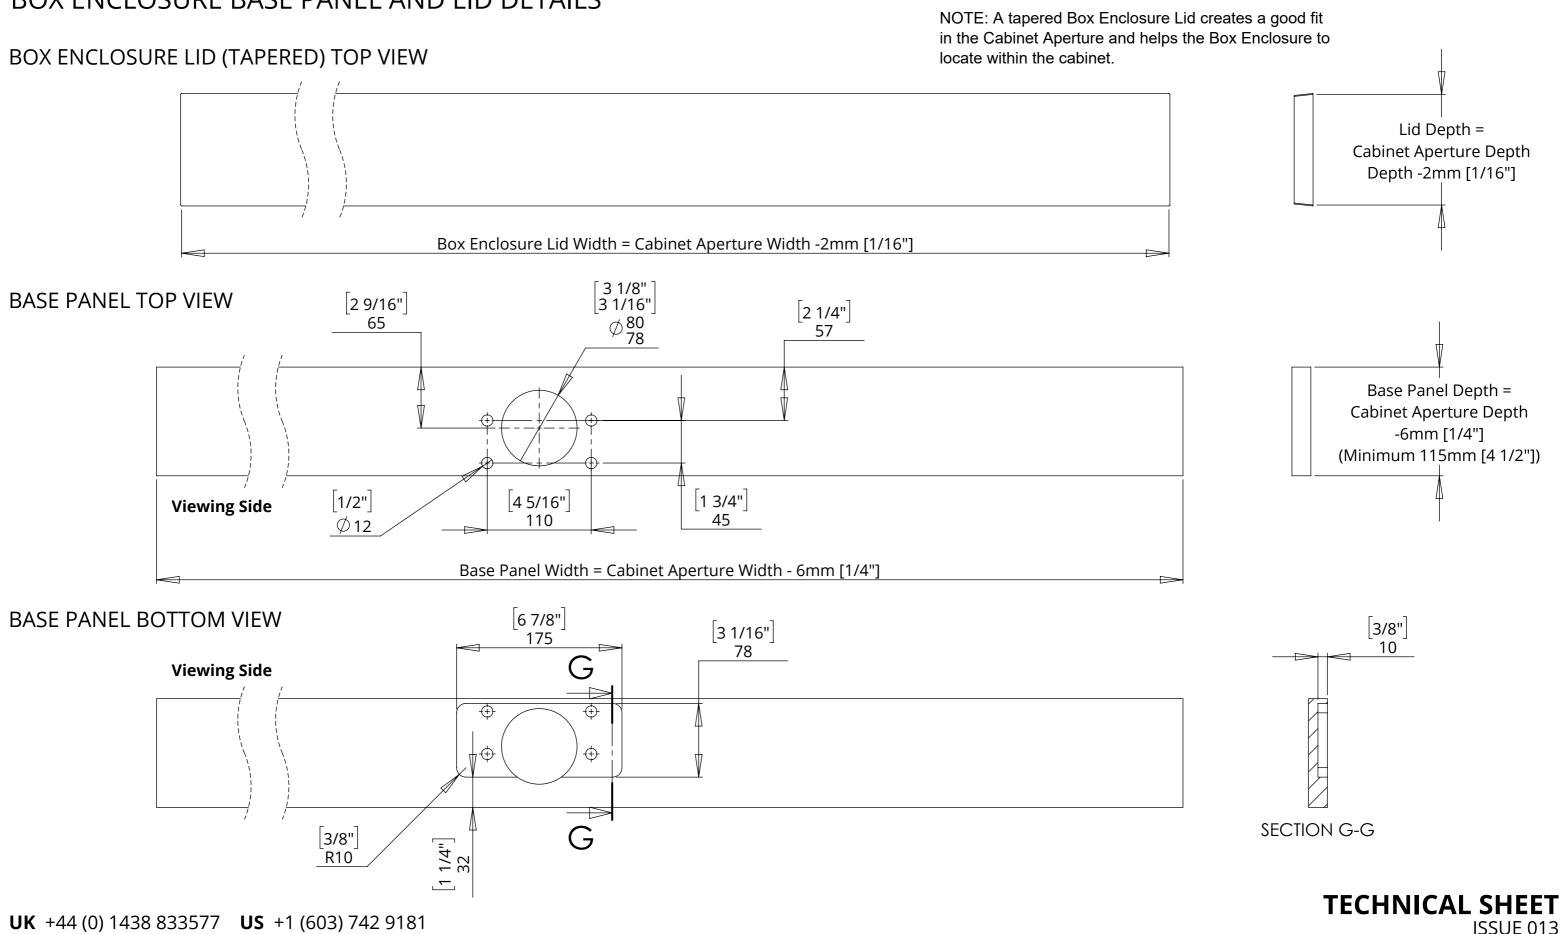

WWW.FUTUREAUTOMATION.NET

future automation


SHEET 6

LSM-PF 6 - MECHANISM UP - IN CABINET

SECTION I-I [7/8"] 23 1/8" Tan Clark Minimum Distance from Screen to inside of aperture Base Panel to Cabinet aperture Η \rightarrow 31 1/2" 17 4 9/16" 800 116 Max Screen Back of Height Mechanism to Mount [13/16"] * * • • 8 **8** 20 Max Thickness \odot 0 of Base and \odot \odot Cabinet Top 37 3/8" 950 OH Internal \odot Cabinet Height 0 O. \vdash 6 1/16" Η 154 **SECTION H-H** Internal Cabinet Width = Screen Width + 60 [2 3/8"] Minimum Width = 850 [33 7/16"]

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181 www.**FUTUREAUTOMATION**.NET


fa future automation

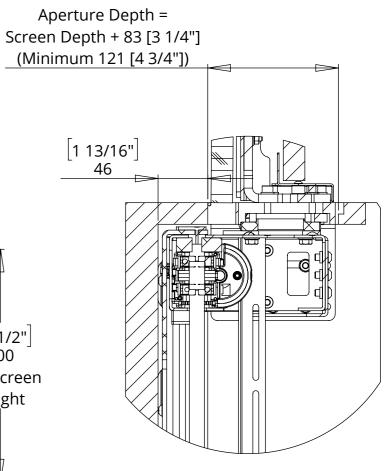

DETAIL J




LSM-PF 6 - MECHANISM DOWN - IN CABINET

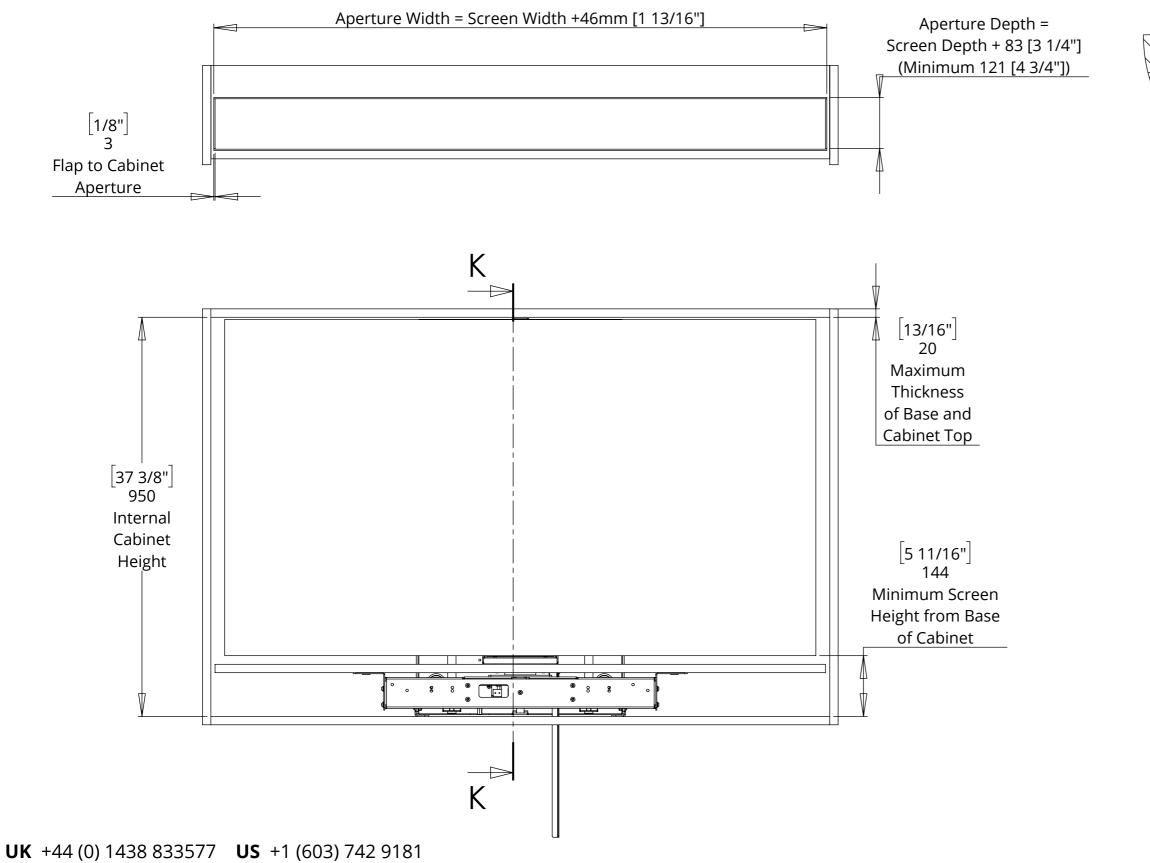

www.FUTUREAUTOMATION.NET

fa future automation

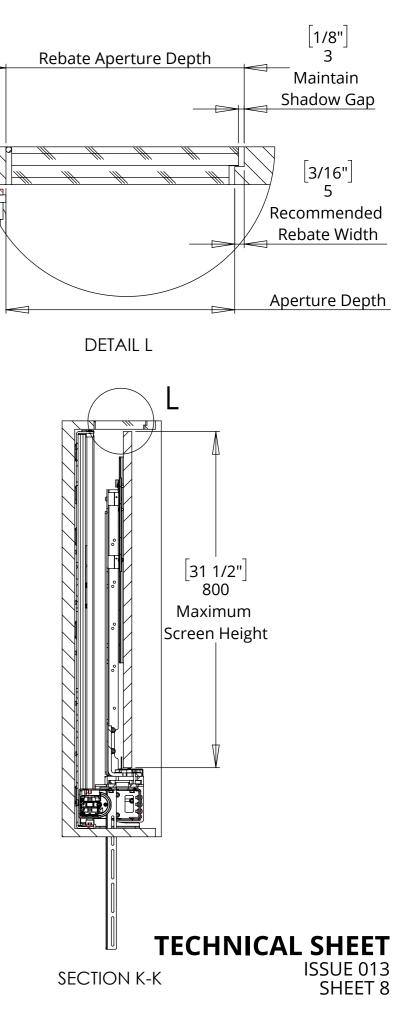



A step is required on the front of

front edge of the cabinet aperture


the flap to meet a step in the

PUSH FLAP BASE PANEL AND FLAP DETAILS

Flap depth dimensions are based on a 3mm thick piano hinge Required flap dimensions may vary dependant on the hinge used


FLAP PANEL - BOTTOM VIEW



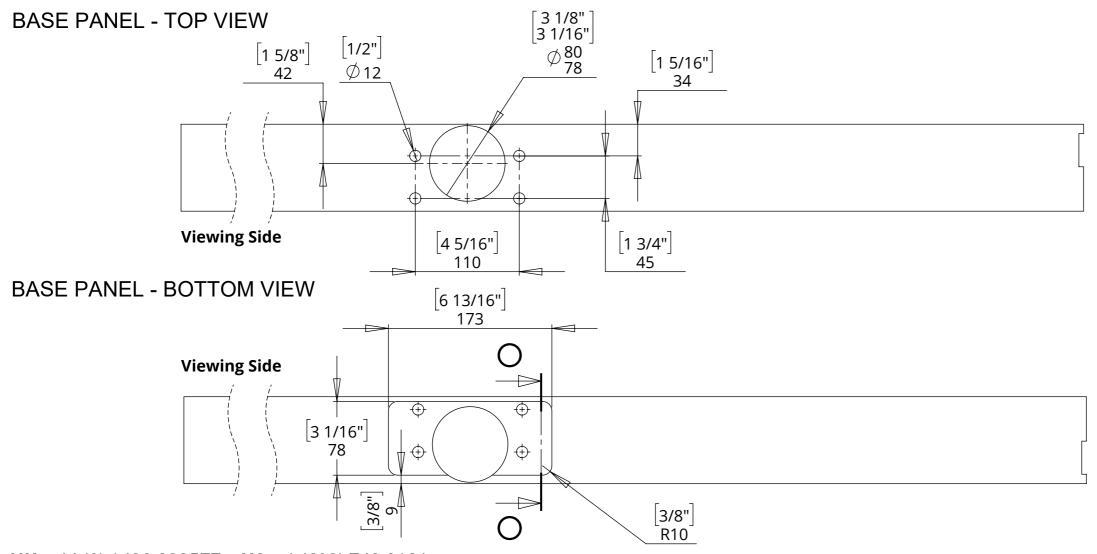


UK +44 (0) 1438 833577 **US** +1 (603) 742 9181 www.**FUTUREAUTOMATION**.NET

future automation

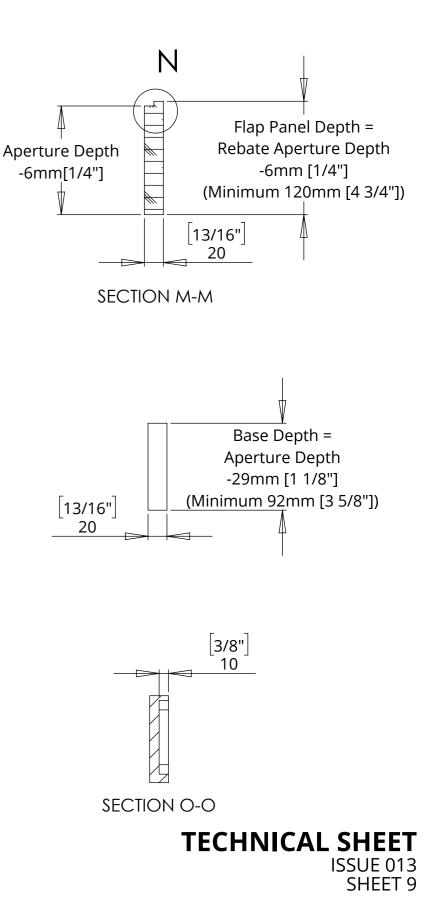

BOX ENCLOSURE POSITION ADJUSTMENT

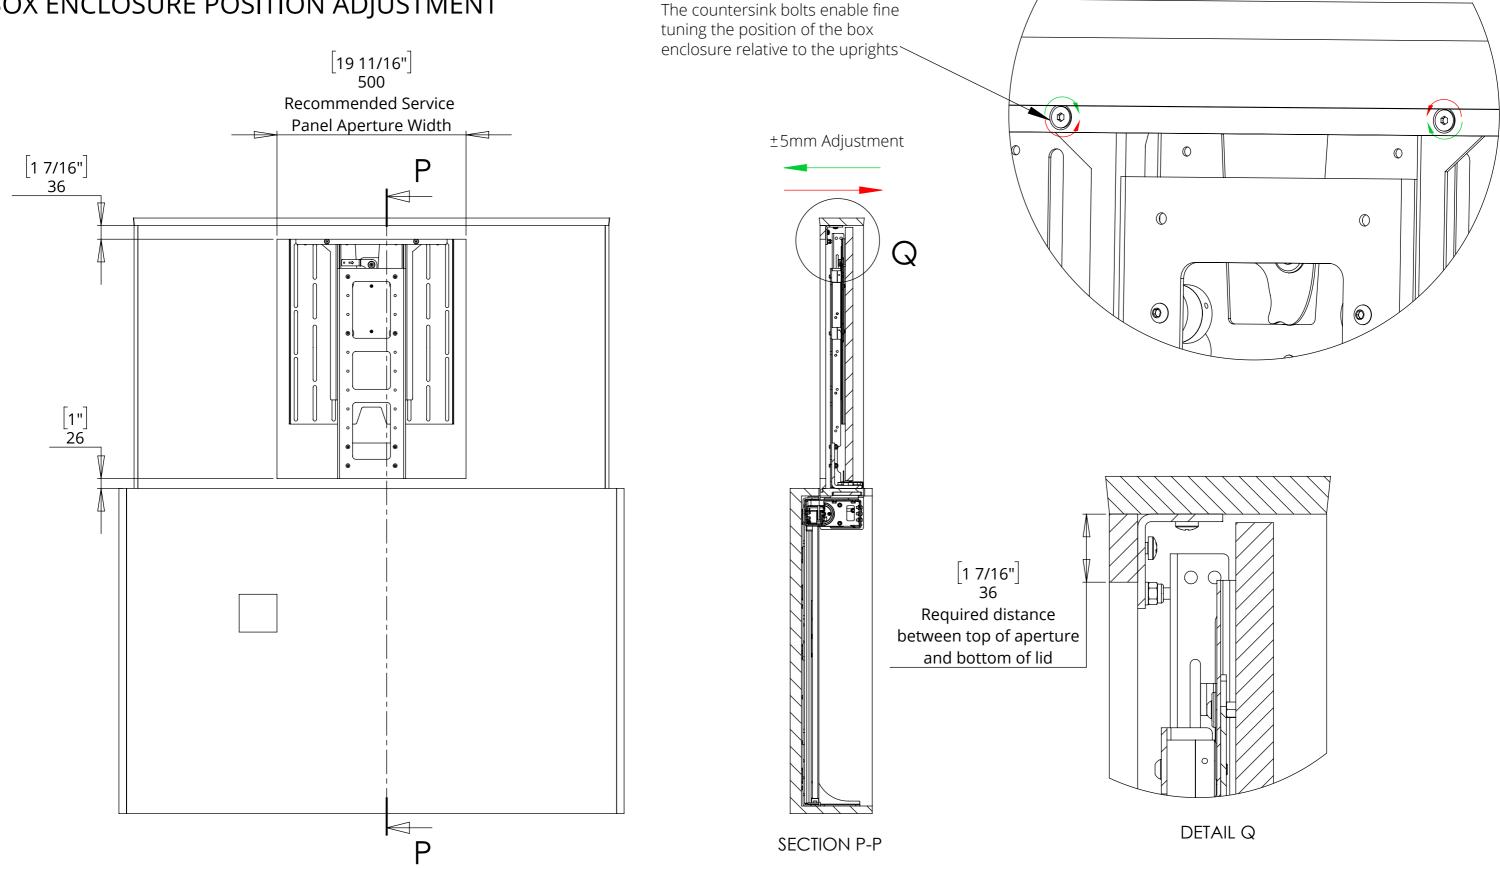

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181 WWW.FUTUREAUTOMATION.NET


future automation fa

TECHNICAL SHEET ISSUE 013 SHEET 10



A standard adjustable height VESA 400 mount is included. This is also compatible with VESA 300 and 200 mounting patterns

Separate VESA 300 and 200 mounts are available.

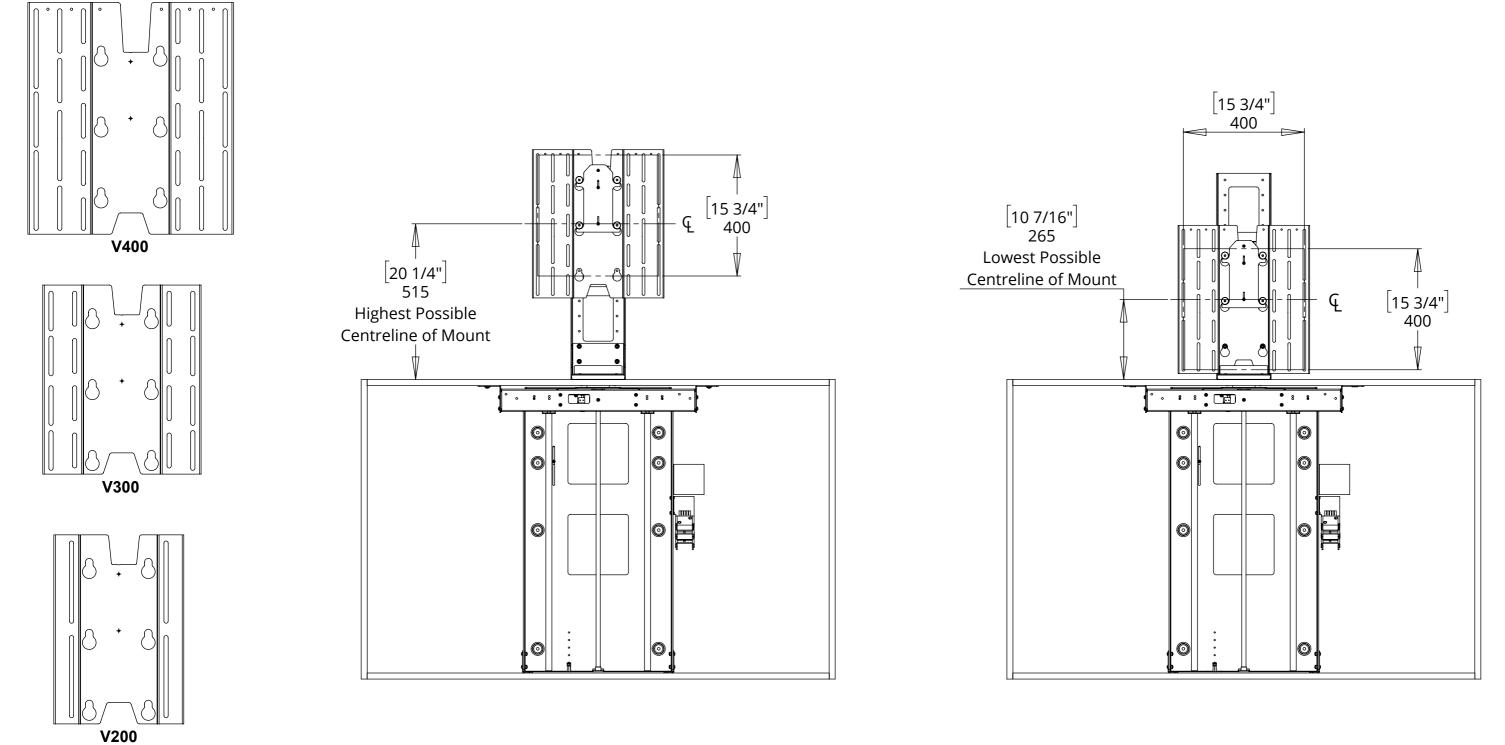


UK +44 (0) 1438 833577 **US** +1 (603) 742 9181 www.**FUTUREAUTOMATION**.NET

fa future automation

TECHNICAL SHEET ISSUE 013 SHEET 11


MECHANISM INSTALLTION OVERVIEW

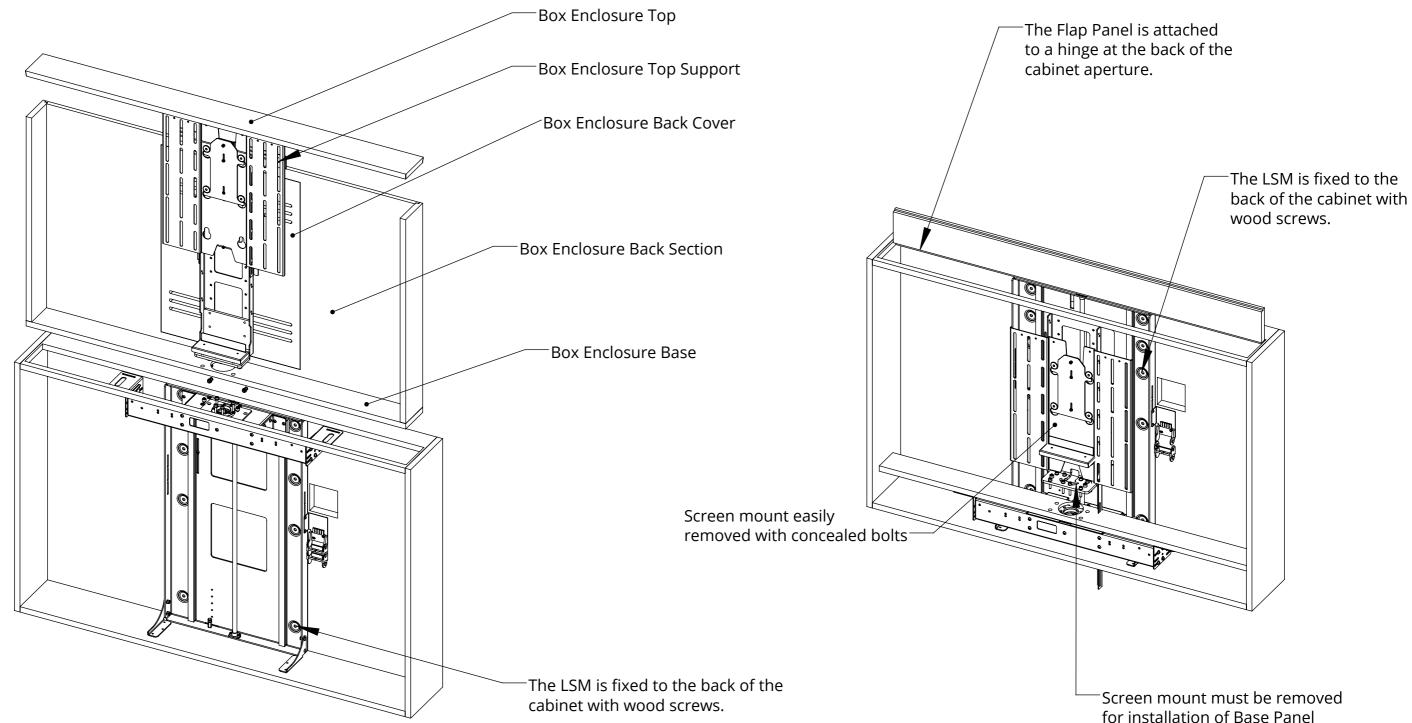

future automation fal



OVERALL MECHANISM DIMENSIONS

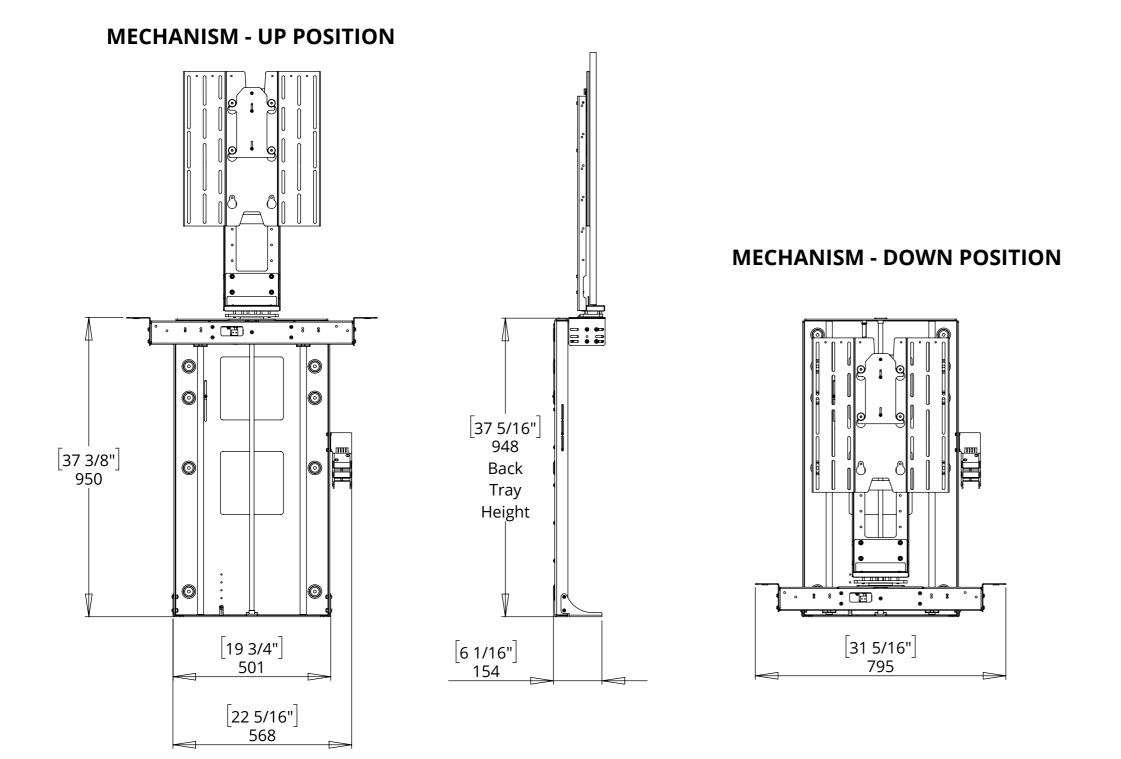

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181 www.**FUTUREAUTOMATION**.NET

fa future automation

