

fa future automation



SPECIFICATION	MEASUREMENTS	
Maximum Screen Height	910mm (35 13/16")	
Maximum Lifting Capacity	50Kg (110lb)	
Maximum Lifting Capacity (Marine)	30Kg (66lb)	
Internal Cabinet Height	1060mm (41 3/4")	
Decibel Rating	52 dB	
Packaging Dimensions	1250 x 850 x 330mm (49 3/16" x 33 7/16 x 13")	
Shipping Weight	35Kg (77lb)	
Movement Type	Motorised	
Power Supply Required	110V - 240V AC	
Power Consumption	250 - 500W	
Power Consumption Standby	3W	
Mounting Patterns Supported	VESA 400, 300, 200 W x 400, 300, 200 H	
Control Options	IR Remote, RS232, Contact Closure, RF Available	
Product Options / Features	Specific B&O and Loewe mounts / adapters, Custom RAL paint finishes	
Package Contents	nts Mechanism, IR remote control, Push Flap Kit, Box Enclosure Kit	
Marine Suitable	Yes	


a future automation





CABLE ROUTING

The LSM has an easily removable Mount Cover that cables from the screen can be routed underneath. Cables then travel through the centre of the Mount Boss and into the beam. Cables must be routed carefully to prevent any interference with the LSM beam as it operates.

Screen and Mechanism cables should be routed to a control box outside of the cabinet via an opening in the back of the cabinet or a conduit leading to the bottom.

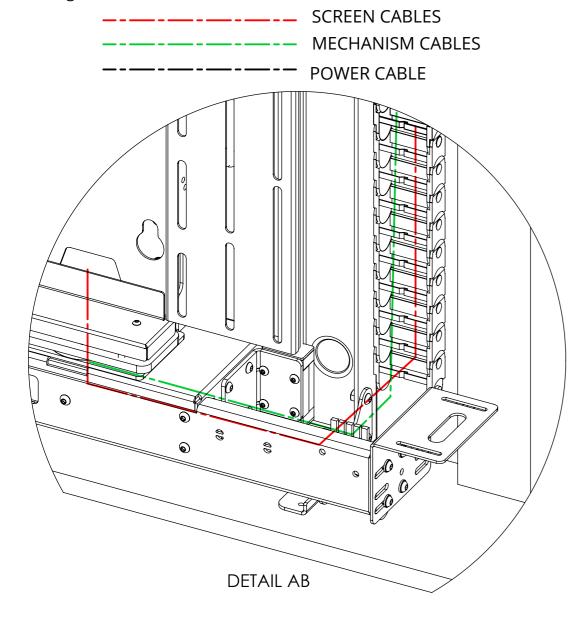

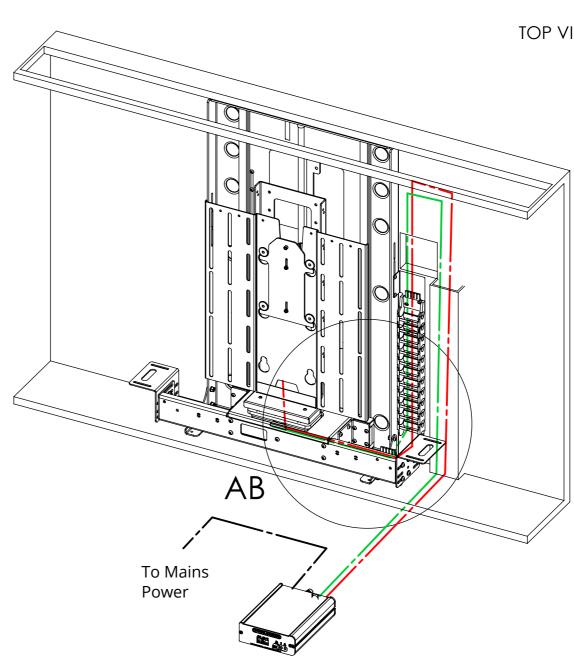

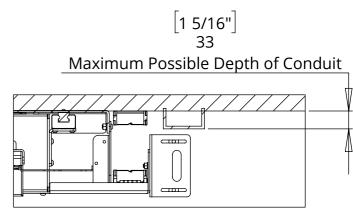




future automation





LSM-BE 7 - MECHANISM UP - IN CABINET

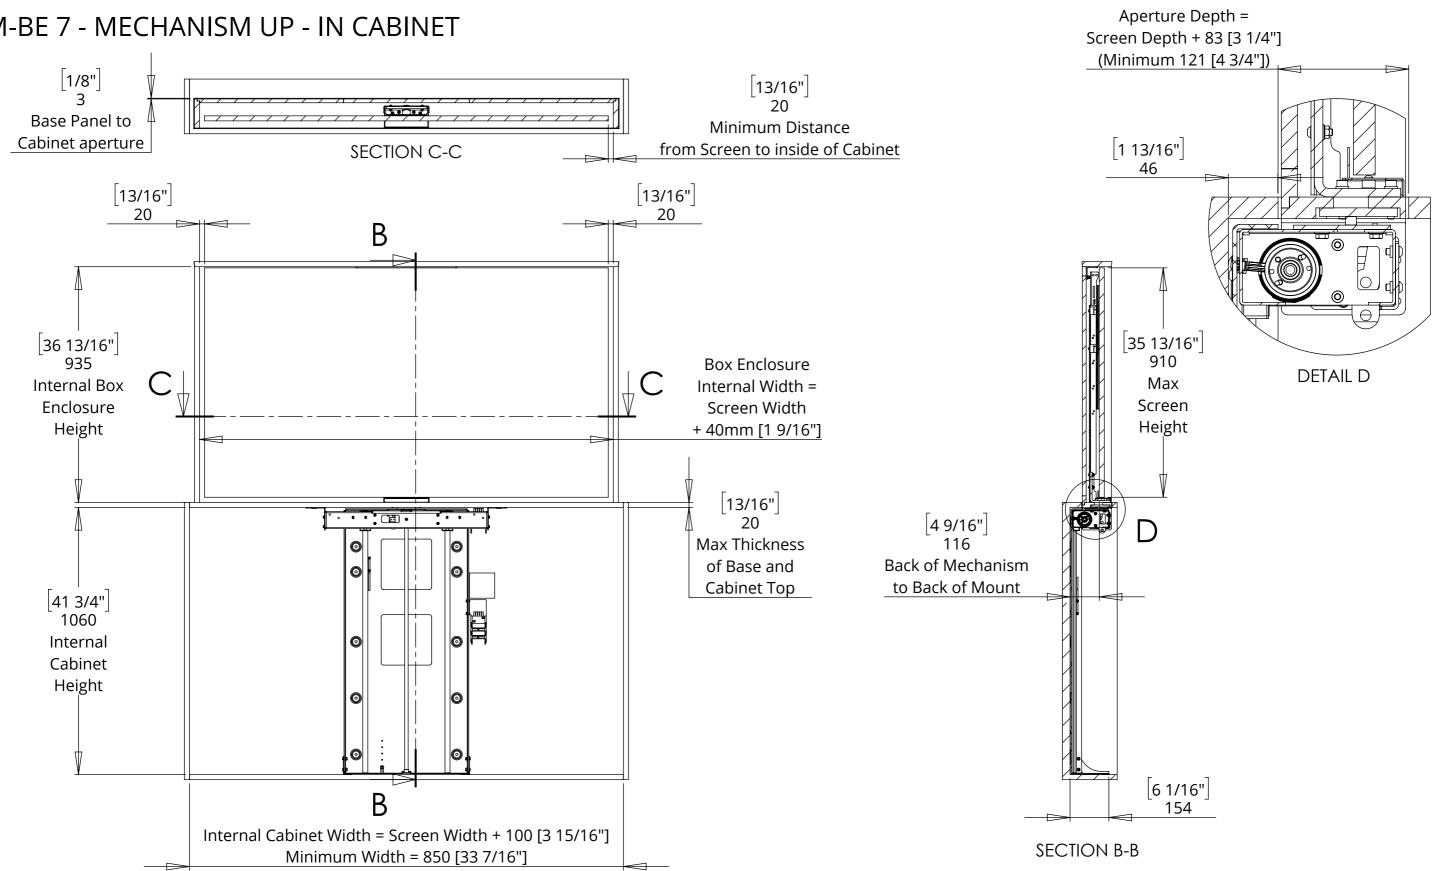


UK +44 (0) 1438 833577 **US** +1 (603) 742 9181 WWW.FUTUREAUTOMATION.NET

future automation



LSM-BE 7 - MECHANISM DOWN - IN CABINET


Shown with tapered Box Enclosure Lid in square Cabinet Aperture. A tapered Cabinet Aperture can be used to improve the fit.

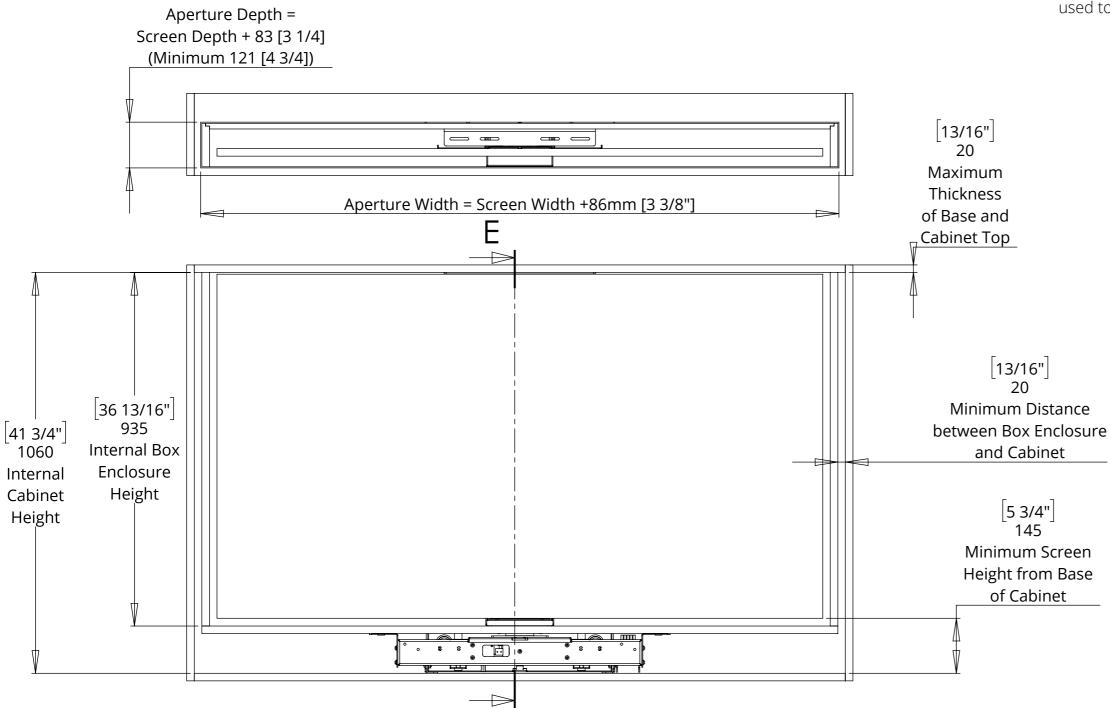

Е



future automation

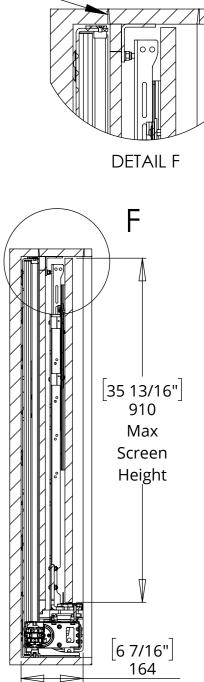

SECTION E-E


TECHNICAL SHEET ISSUE 013 SHEET 5




BOX ENCLOSURE BASE PANEL AND LID DETAILS


BOX ENCLOSURE LID (TAPERED) TOP VIEW

NOTE: A tapered Box Enclosure Lid creates a good fit in the Cabinet Aperture and helps the Box Enclosure to locate within the cabinet.

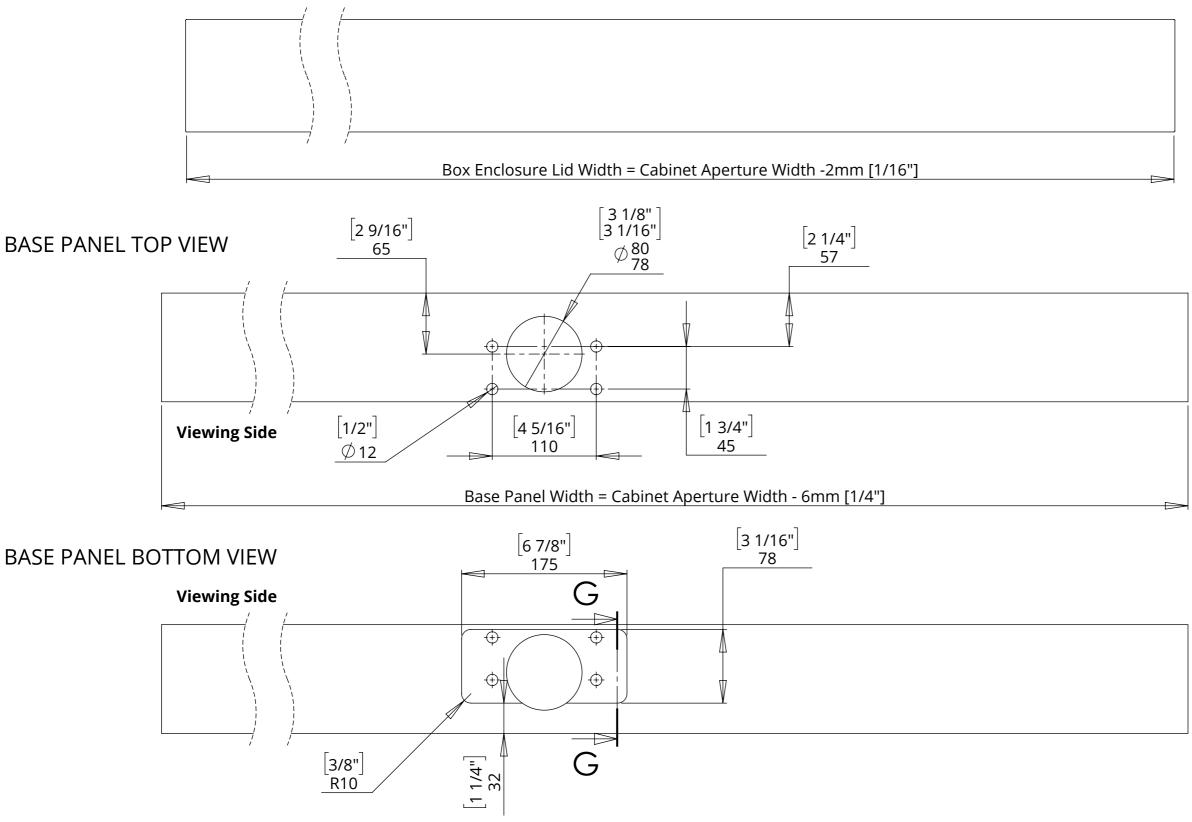


future automation



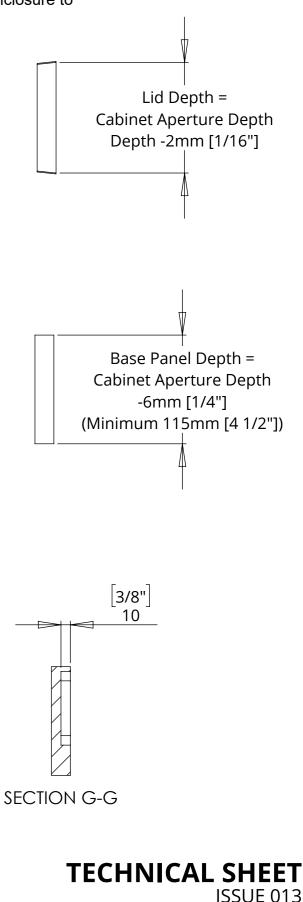


SHEET 6

LSM-PF 7 - MECHANISM UP - IN CABINET

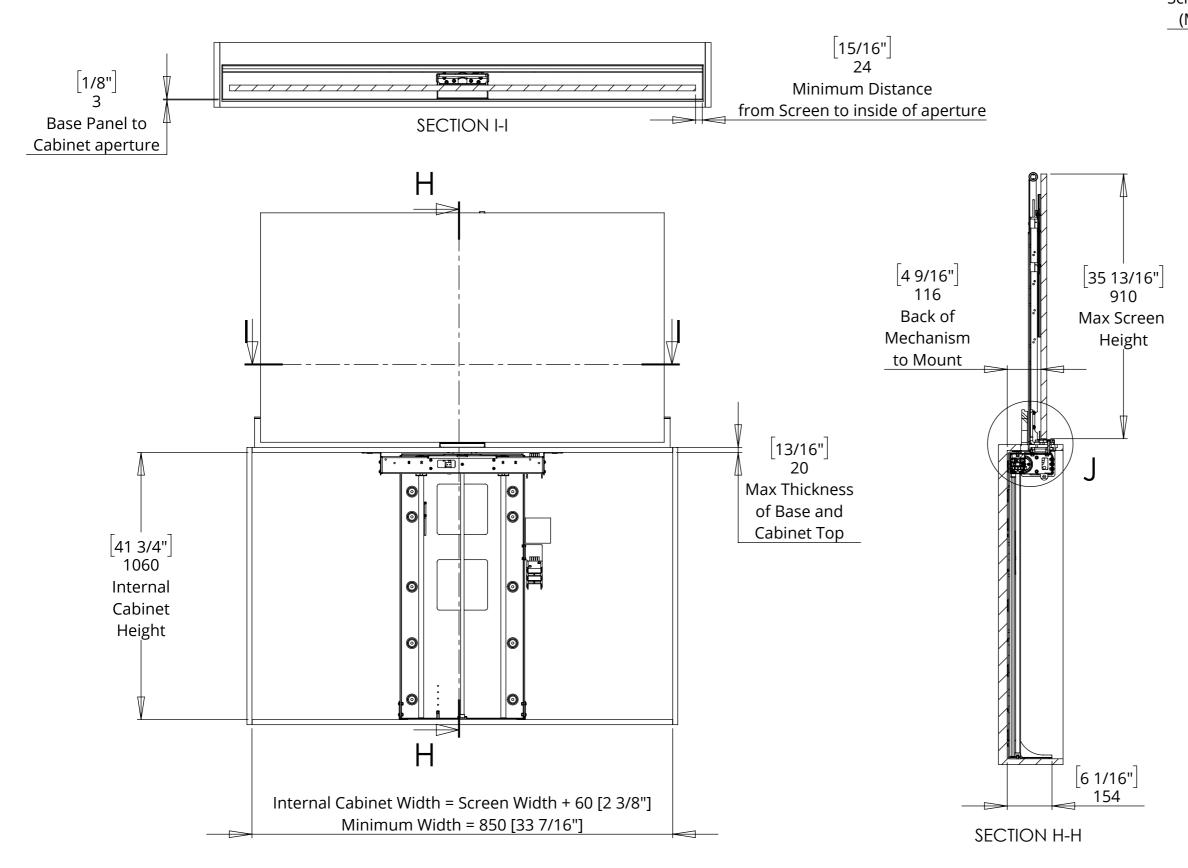

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181 www.**FUTUREAUTOMATION**.NET


fa future automation

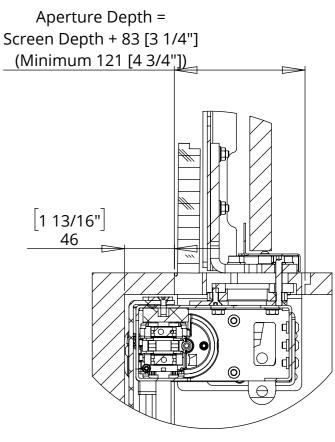

DETAIL J




LSM-PF 7 - MECHANISM DOWN - IN CABINET

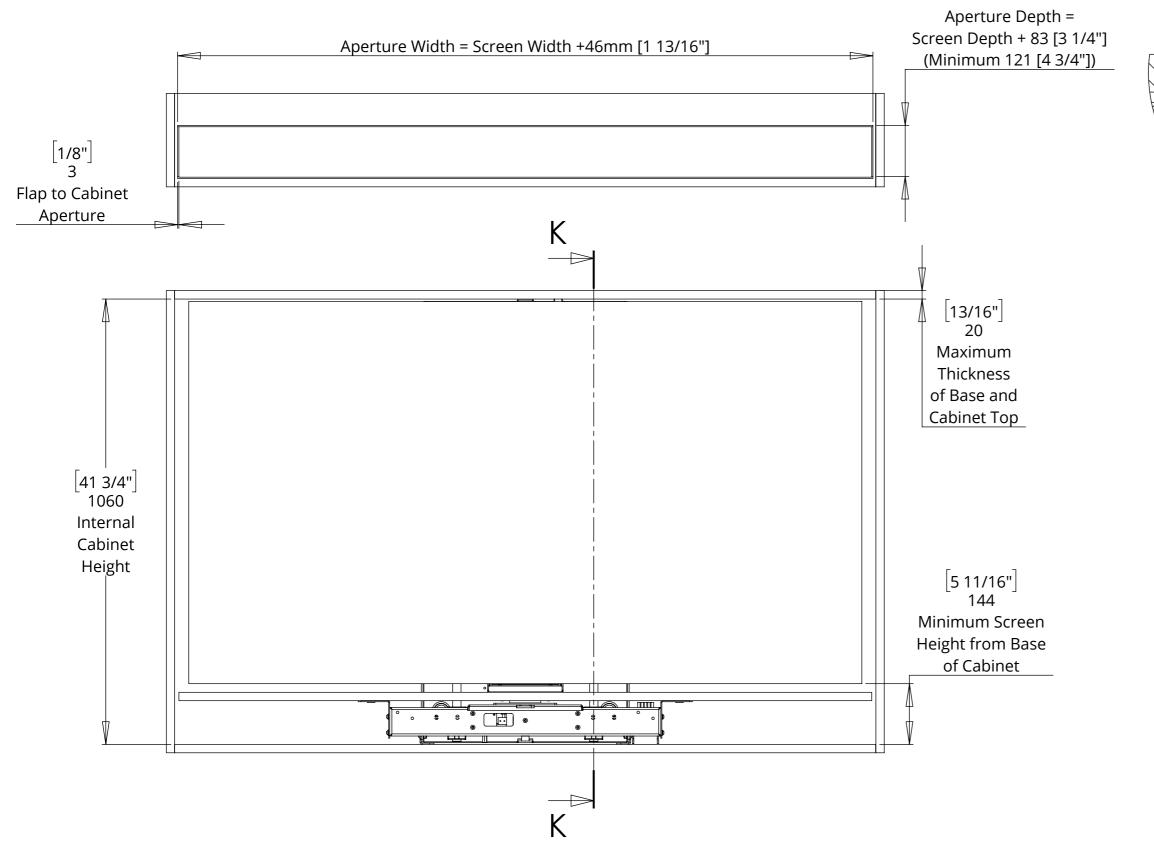

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181 www.**FUTUREAUTOMATION**.NET

fa future automation

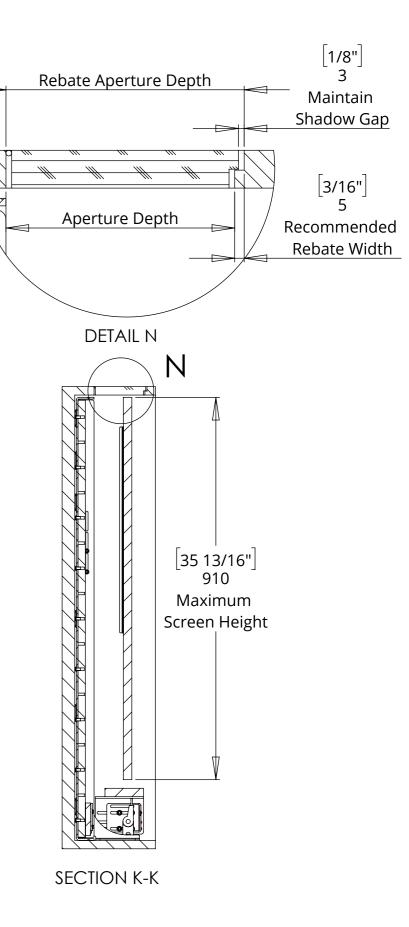





A step is required on the front of

front edge of the cabinet aperture


the flap to meet a step in the

PUSH FLAP BASE PANEL AND FLAP DETAILS

Flap depth dimensions are based on a 3mm thick piano hinge Required flap dimensions may vary dependant on the hinge used


FLAP PANEL - BOTTOM VIEW



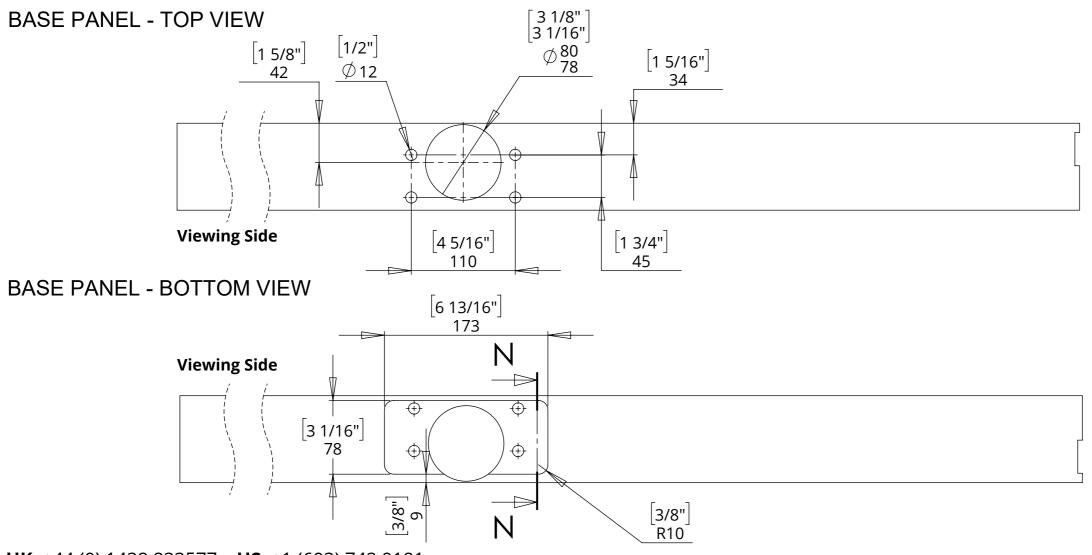


UK +44 (0) 1438 833577 **US** +1 (603) 742 9181 www.**FUTUREAUTOMATION**.NET

future automation

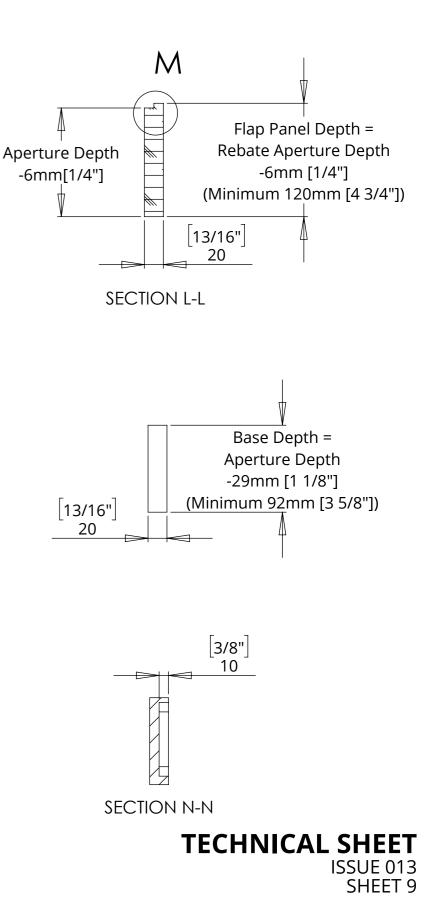

BOX ENCLOSURE POSITION ADJUSTMENT

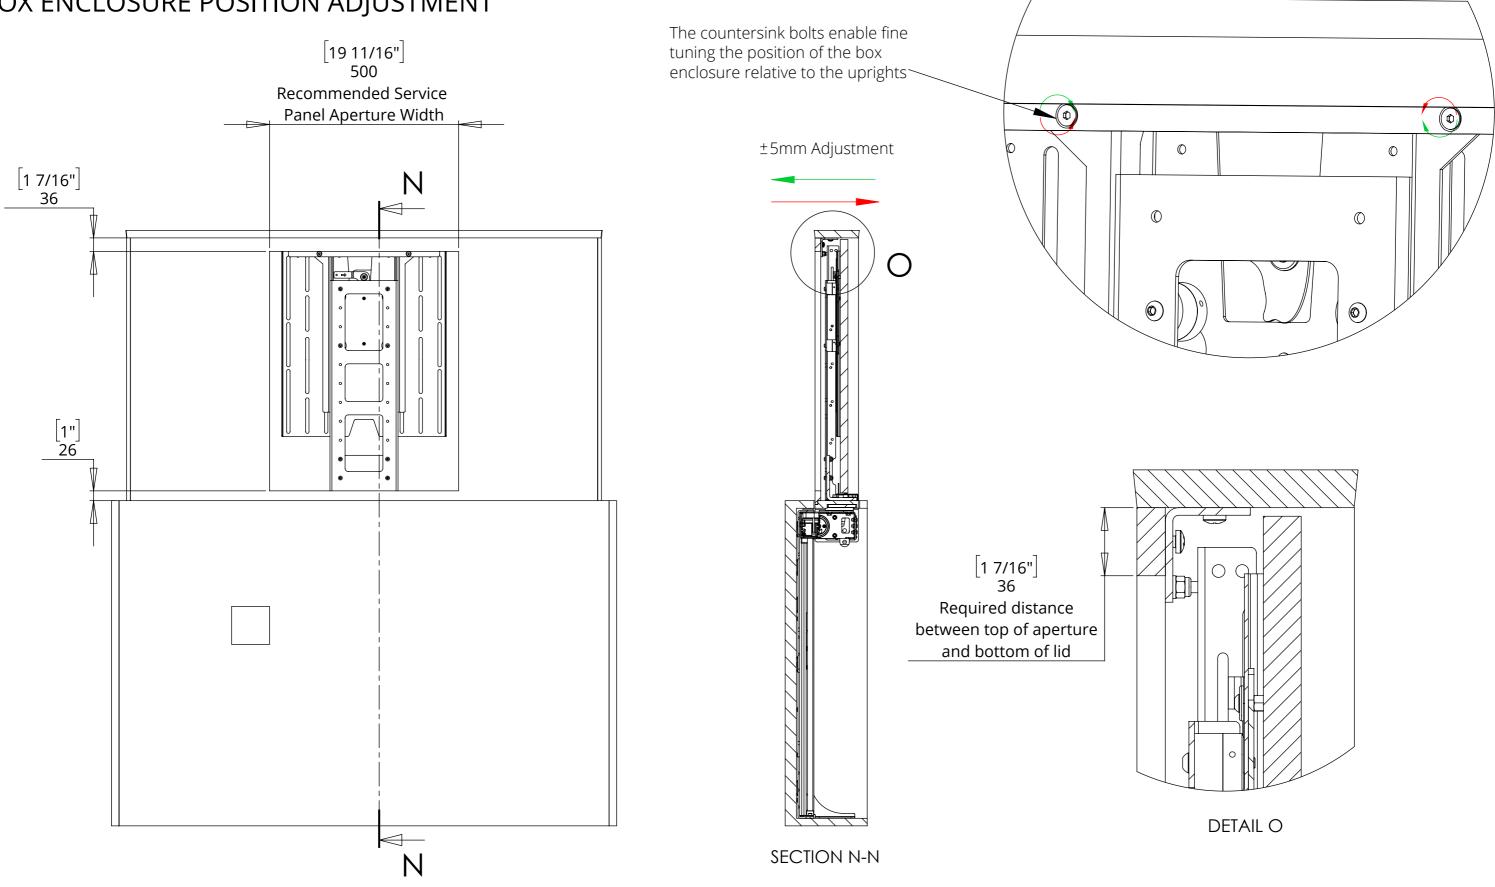

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181 WWW.FUTUREAUTOMATION.NET


future automation fa








A standard adjustable height VESA 400 mount is included. This is also compatible with VESA 300 and 200 mounting patterns

Separate VESA 300 and 200 mounts are available.

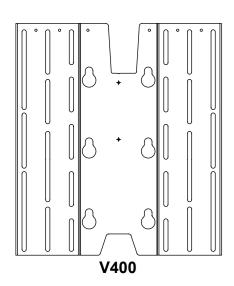






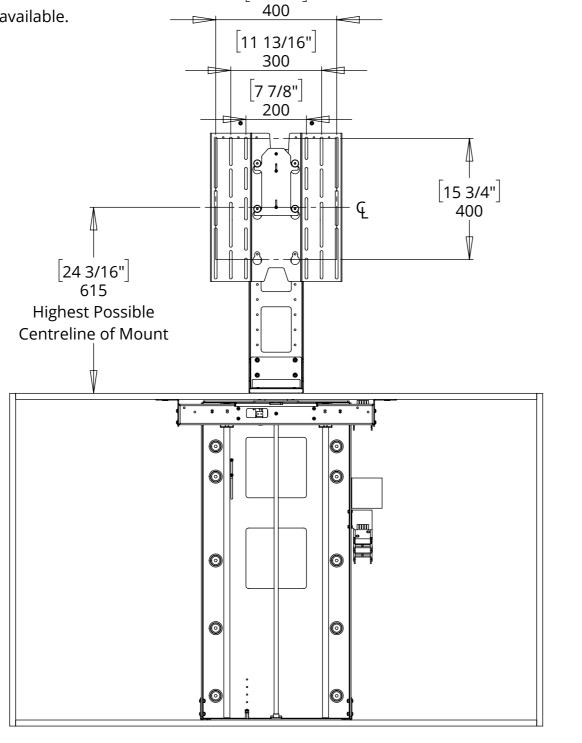

[15 3/4"]

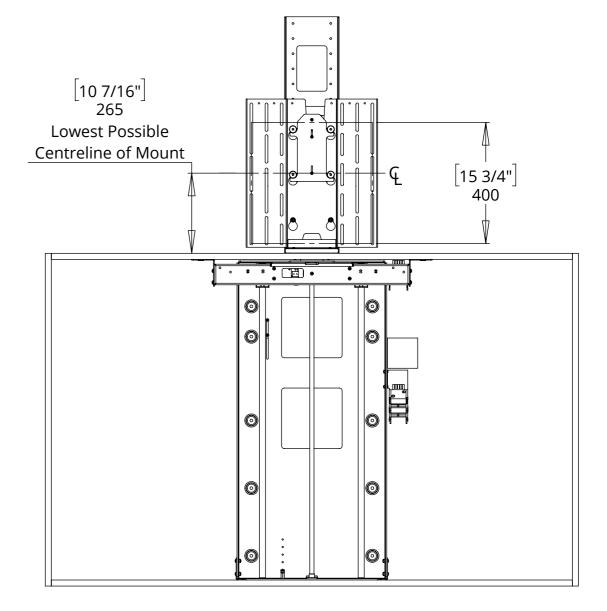


UK +44 (0) 1438 833577 **US** +1 (603) 742 9181 www.**FUTUREAUTOMATION**.NET



future automation

TECHNICAL SHEET ISSUE 013 SHEET 11

MECHANISM INSTALLTION OVERVIEW

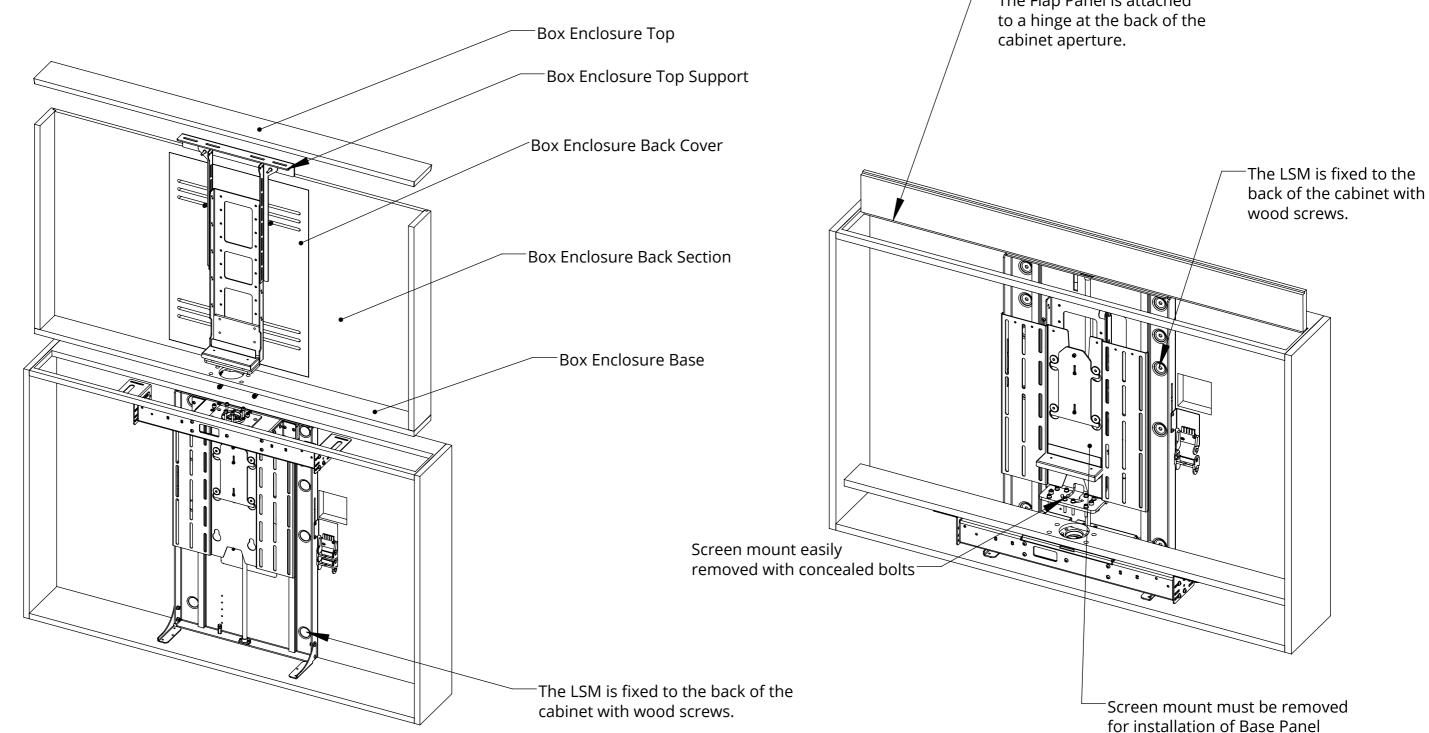


future automation fa

The Flap Panel is attached




OVERALL MECHANISM DIMENSIONS

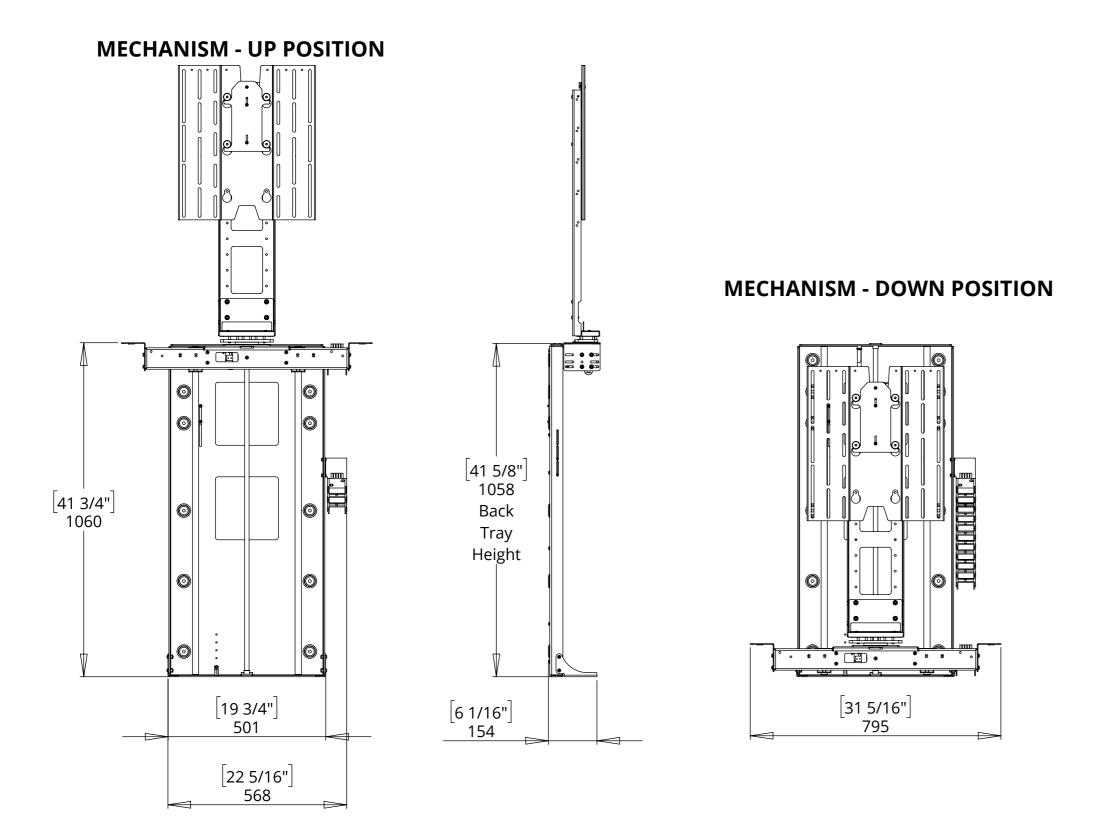

UK +44 (0) 1438 833577 US +1 (603) 742 9181 www.FUTUREAUTOMATION.NET

fa future automation

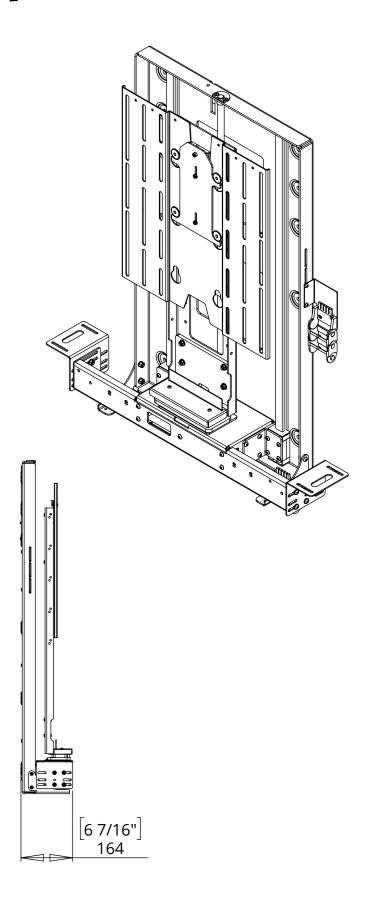

TECHNICAL SHEET ISSUE 013 SHEET 13