


PIC SP 3

PICTURE SPLIT MECHANISM



future automation

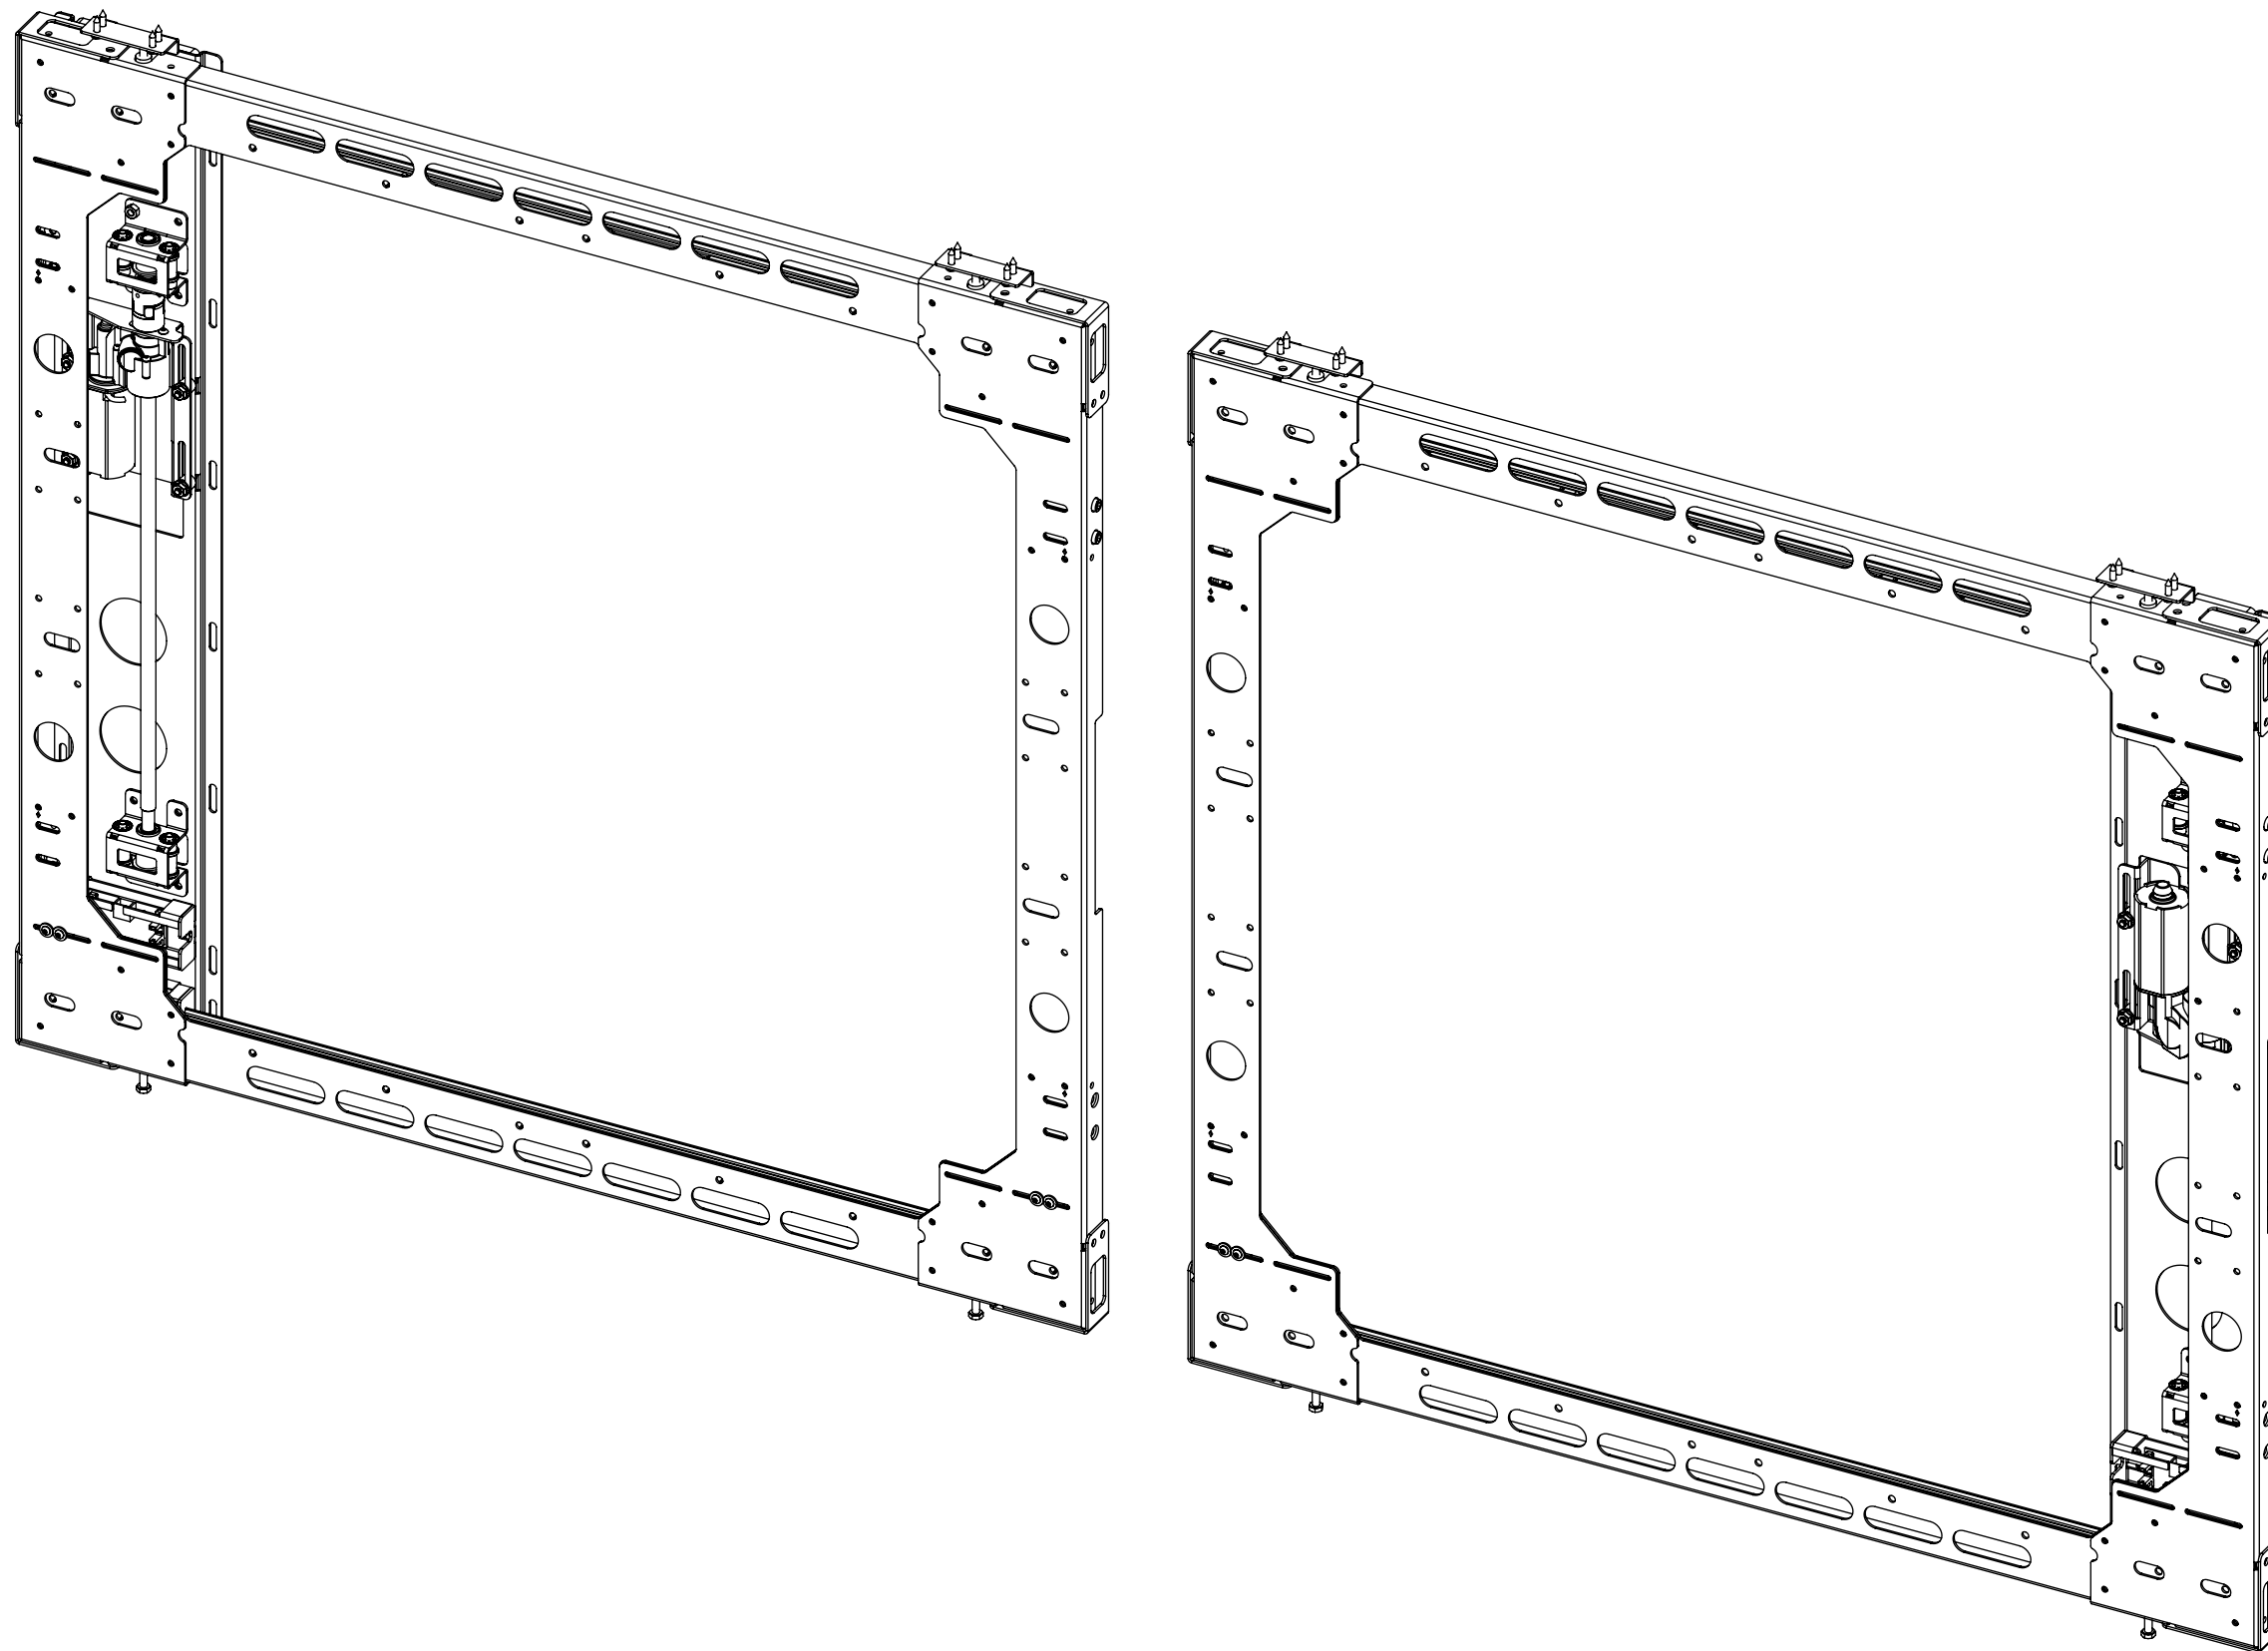

PIC SP 3

PICTURE SPLIT MECHANISM



future automation

SPECIFICATION	MEASUREMENTS
Maximum Screen Size	65" (1650mm)
Maximum Weight Capacity	15Kg (33lb) per Panel
Maximum Speed	120mm/s
Maximum Travel	1650mm (65.0")
Depth From Wall	50mm (2.0")
Product Weight	18.5Kg (40.8lb) per Mechanism
Packaging Dimensions	107cm x 103cm x 36cm (42.12" x 40.55" x 14.17")
Shipping Weight	64Kg
Movement Type	Motorised
Power Supply Required	110V - 240V AC
Power Consumption Max.	110W
Power Consumption Standby	3W
Control Options	IR Remote, RS232, Contact Closure
Product Options / Features	Custom RAL paint finishes
Package Contents	Mechanism, IR remote control
Marine Suitable	No

PIC SP 3

PICTURE SPLIT MECHANISM



future automation

RECESS DETAILS

CABLES:

During installation, cables between the two mechanisms shall be required to run to a suitable storage location; connecting to the control box (308[12.2] x 150[5.9] x 52[2.1]).

A nominal $\varnothing 40\text{mm}[1.6]$ cable entry/exit hole is recommended to provide suitable access for cable routing.


The control box shall need to be connected into a mains (13A) plug socket. An infrared receiver on a 1.5m[59.1] lead is also plugged into the control box.

PANELS:

The moving panels shall be 10mm[0.4] proud of the wall surface.

NOTE:

1650mm[65.0] is the widest recess this version of the mechanism can cover. This dimension can be reduced for small recesses but **not** increased.

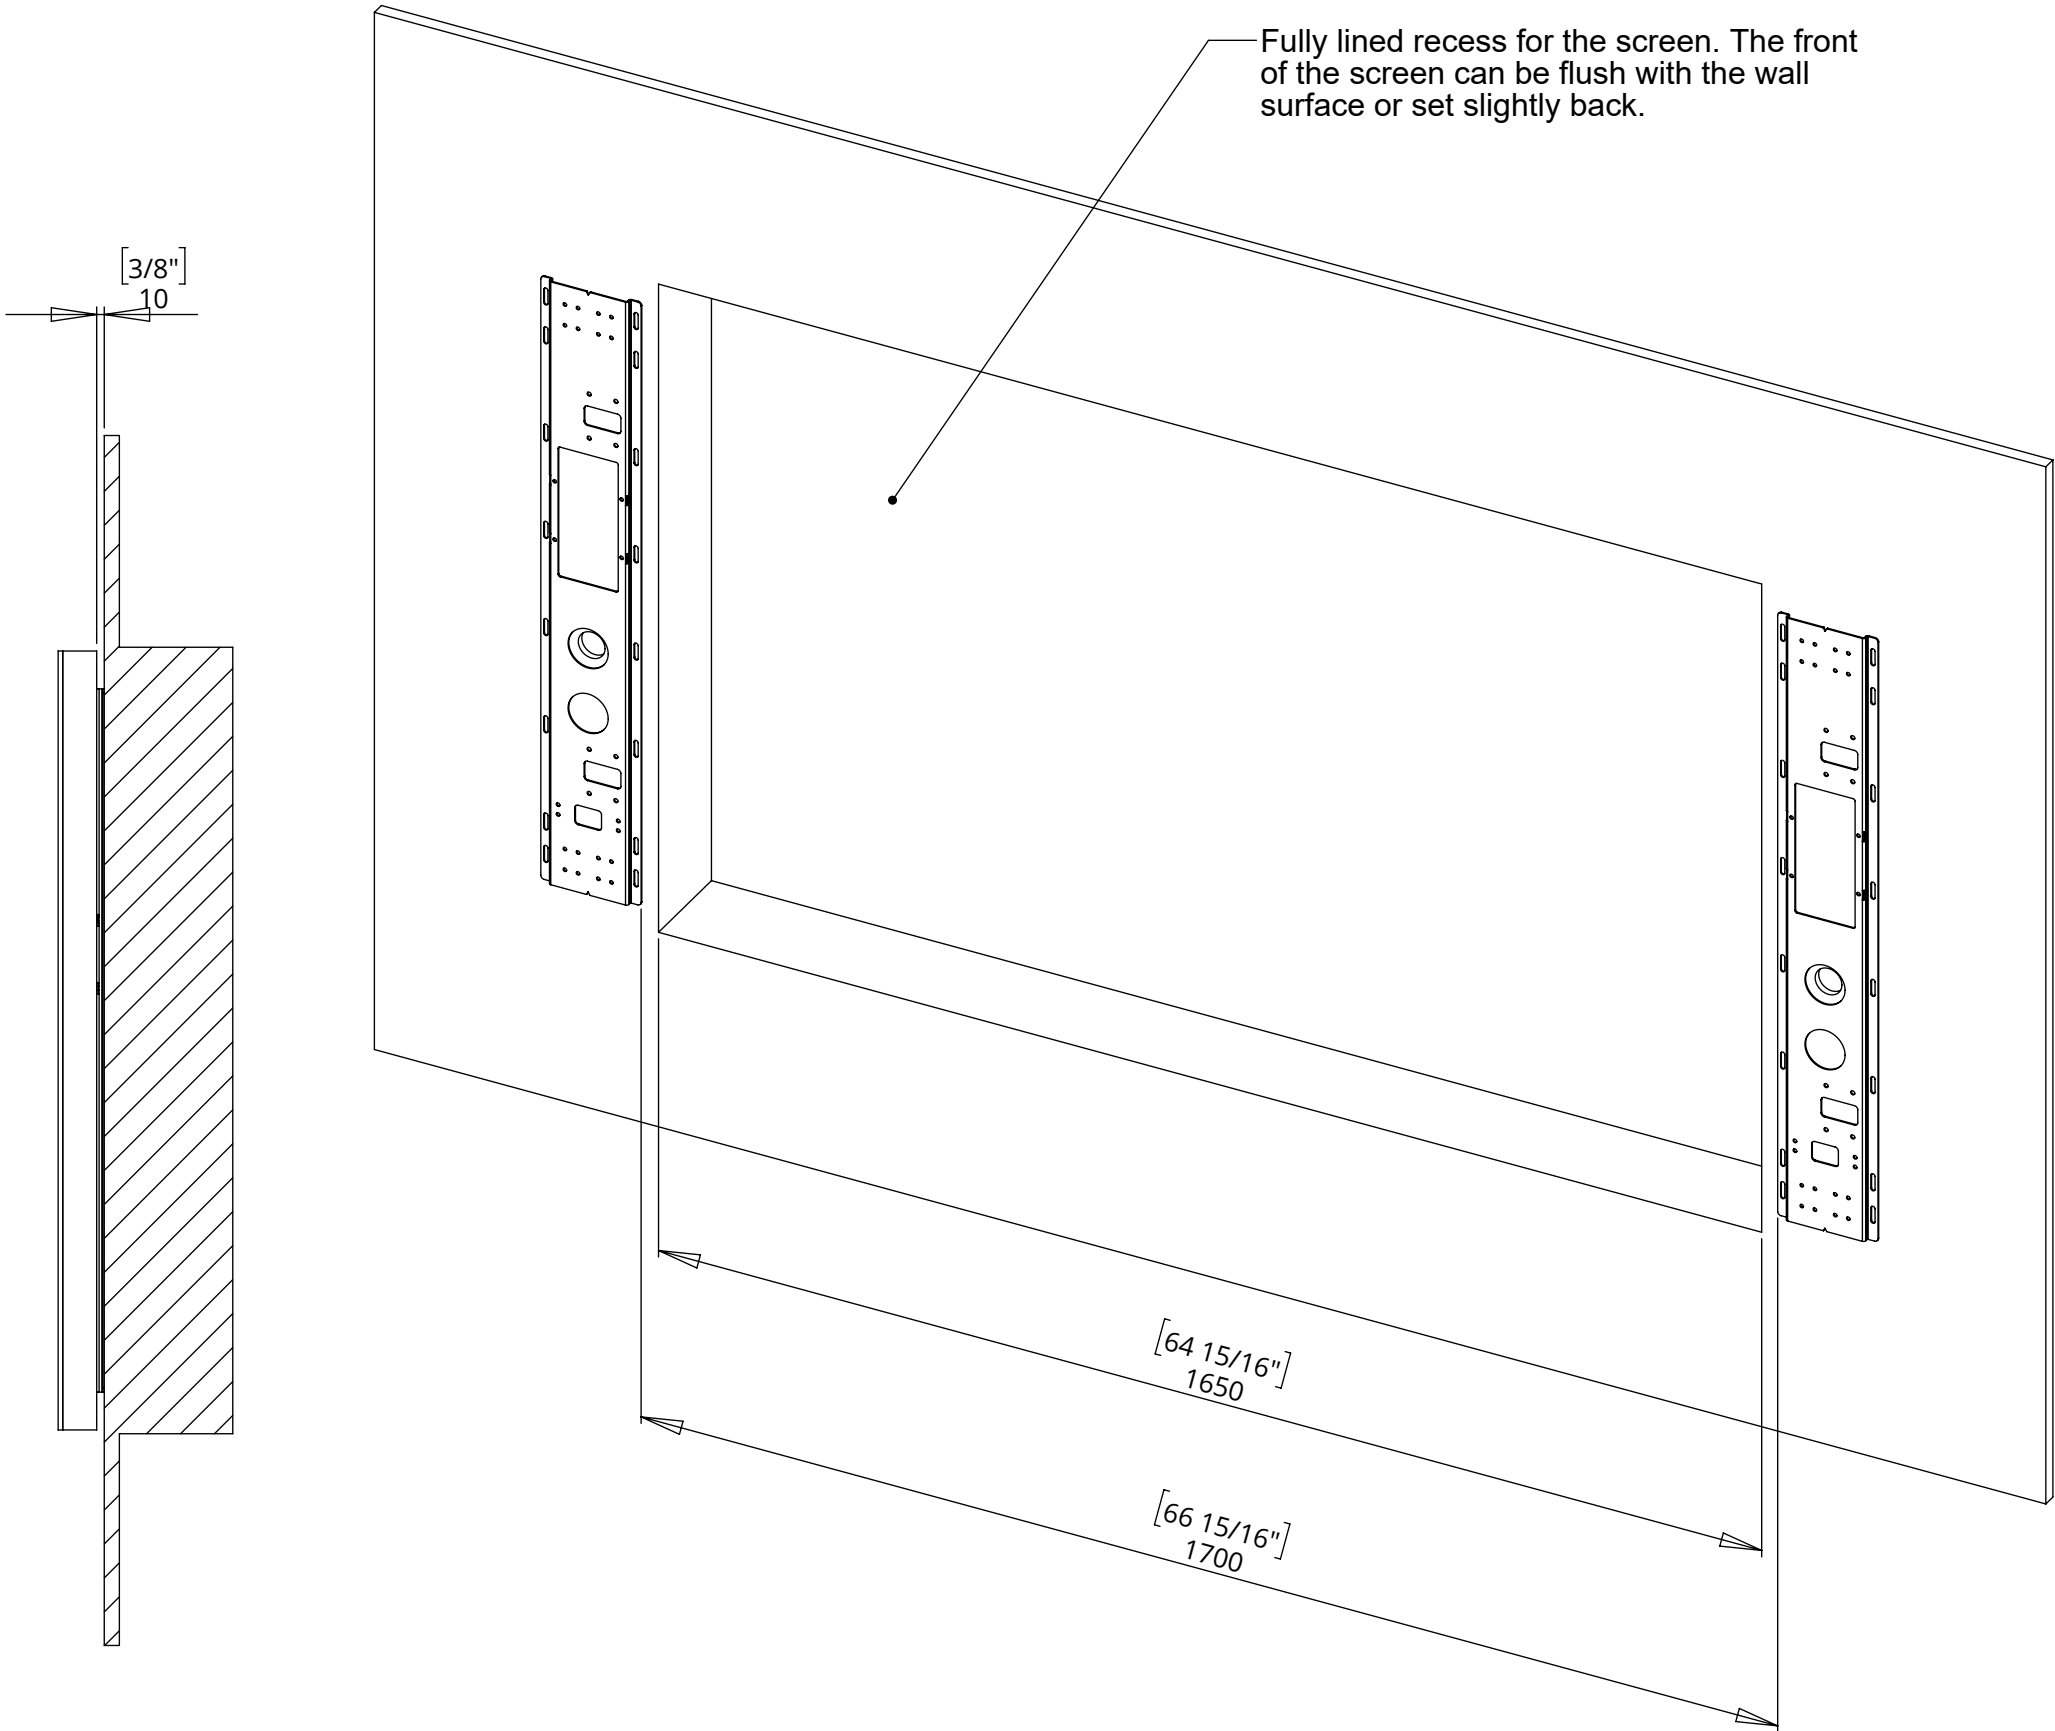

PIC SP 3

PICTURE SPLIT MECHANISM





future automation


PANEL DETAILS

These are suggested dimensions for the panels.


The panels must have an **internal depth of 45mm** to conceal the mechanism; as shown in DETAIL Q.

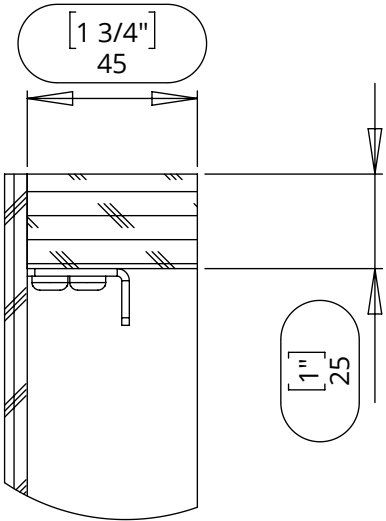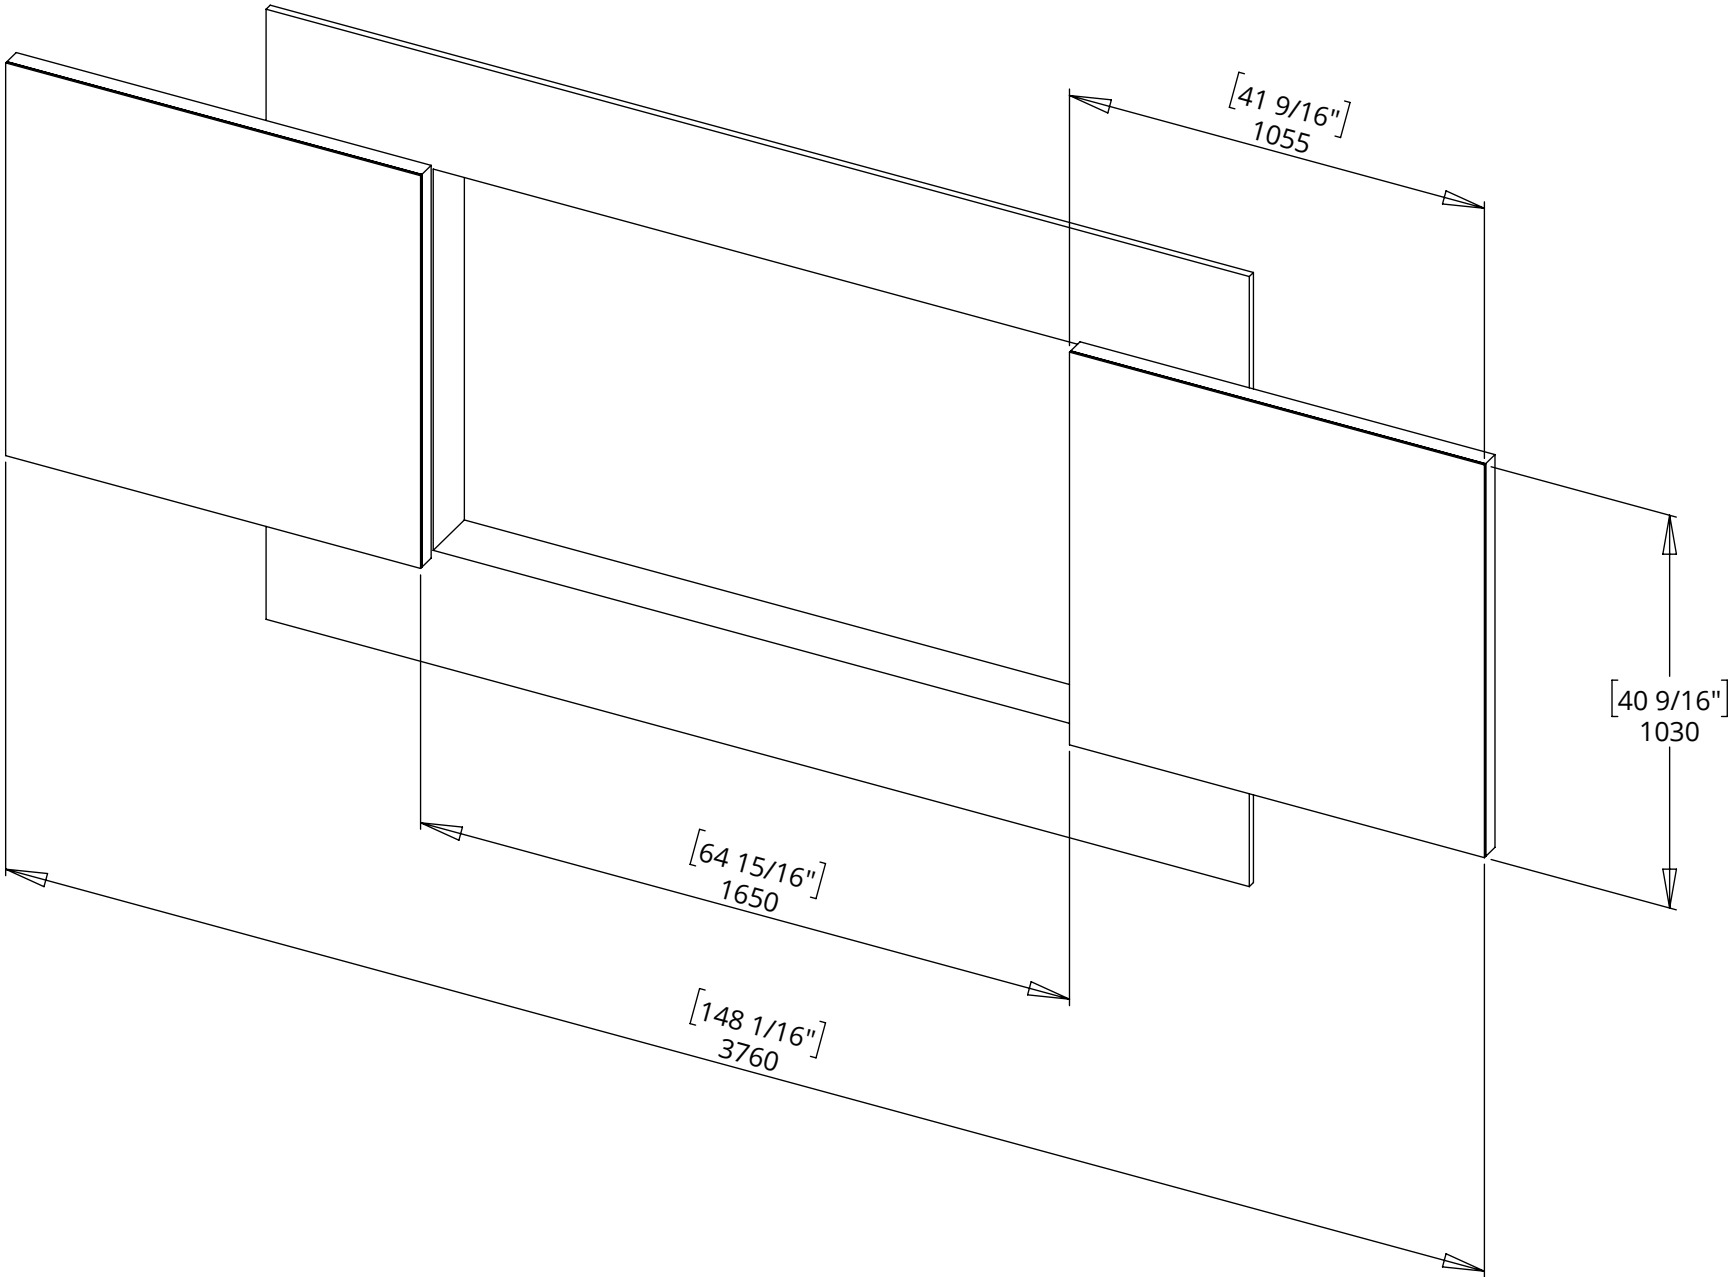

DETAIL Q
SCALE 1 : 2

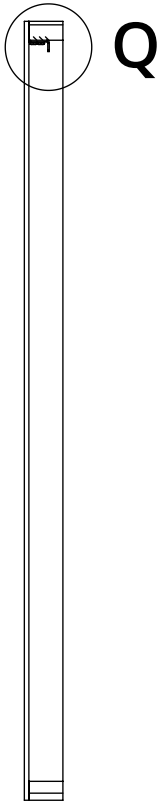

SECTION P-P
SCALE 1 : 10

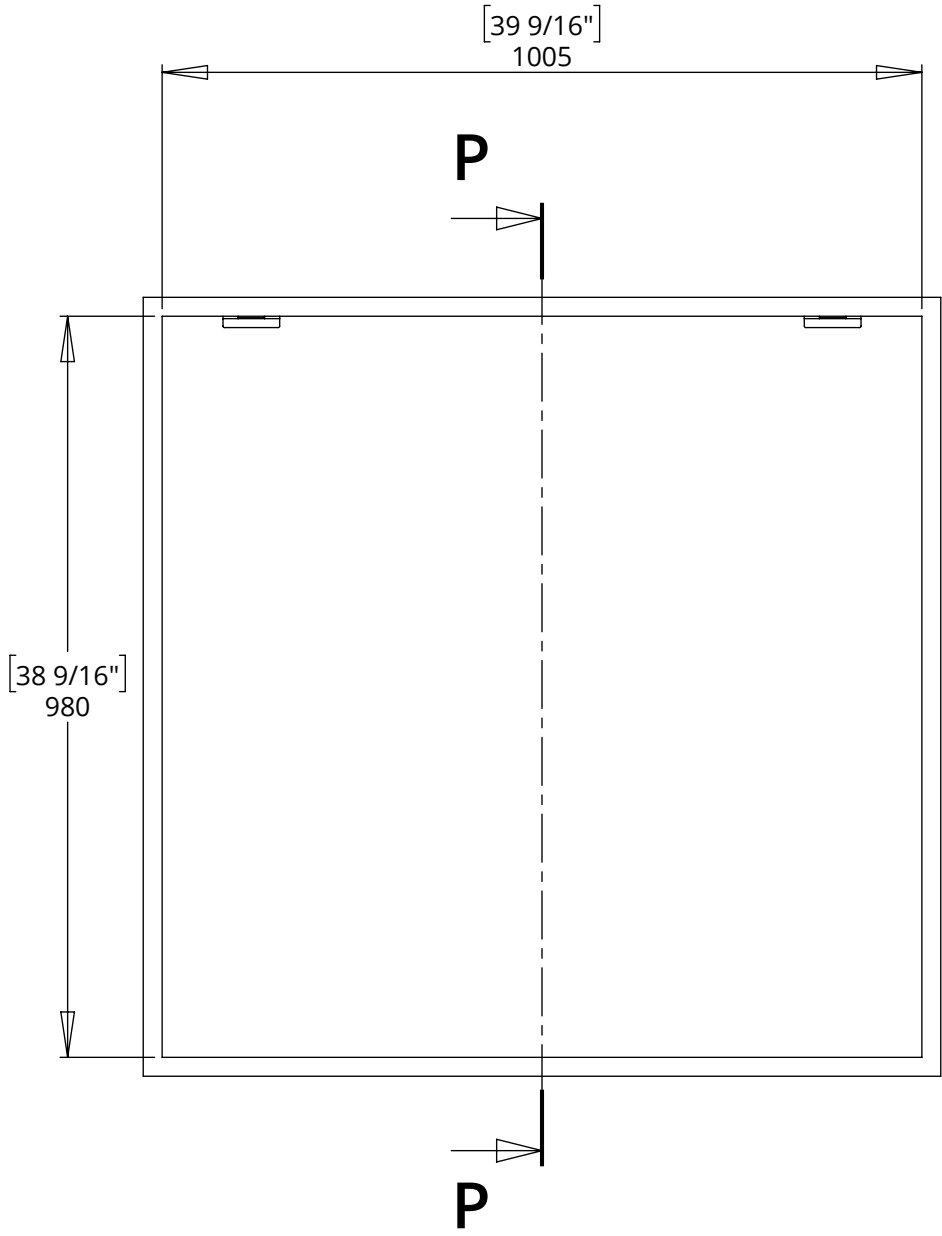


PIC SP 3

PICTURE SPLIT MECHANISM





future automation

PANEL MOUNTING DETAILS

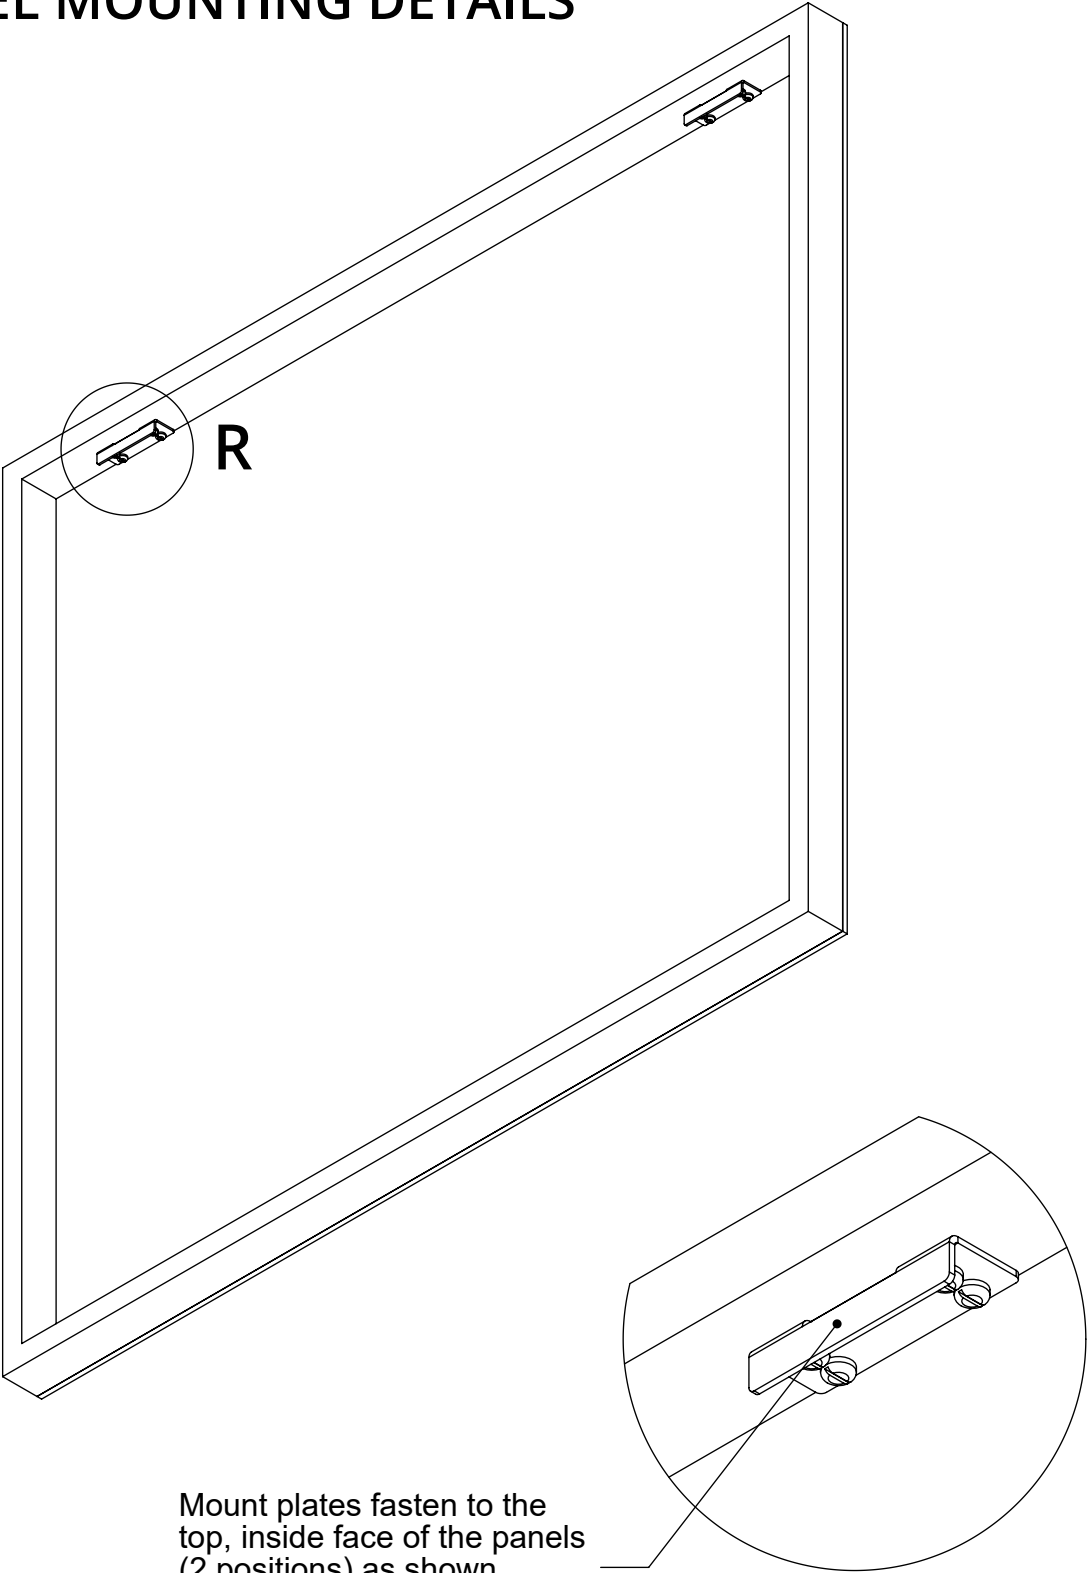


Mount plates fasten to the top, inside face of the panels (2 positions) as shown.

DETAIL R
SCALE 1 : 2

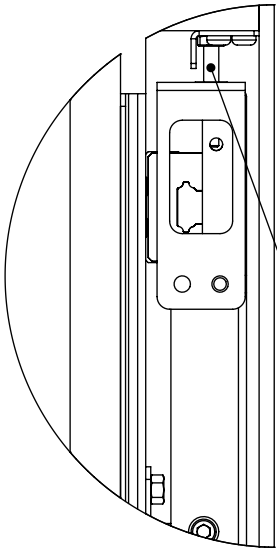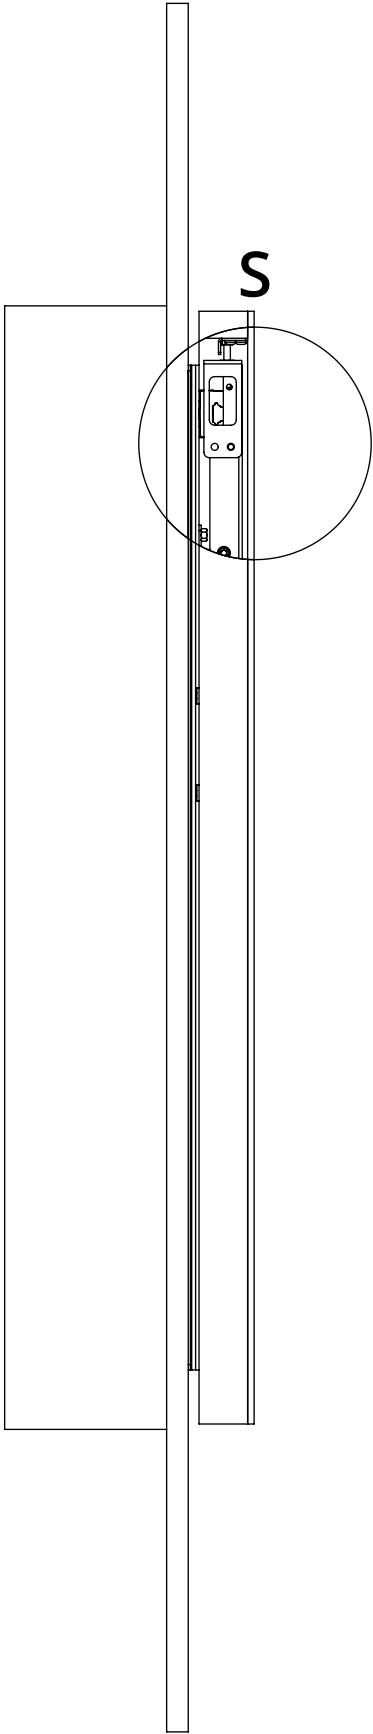

DETAIL S
SCALE 1 : 3

Panel mount plates hook onto two bolts. The height of the bolts can be adjusted to ensure the panels are level.

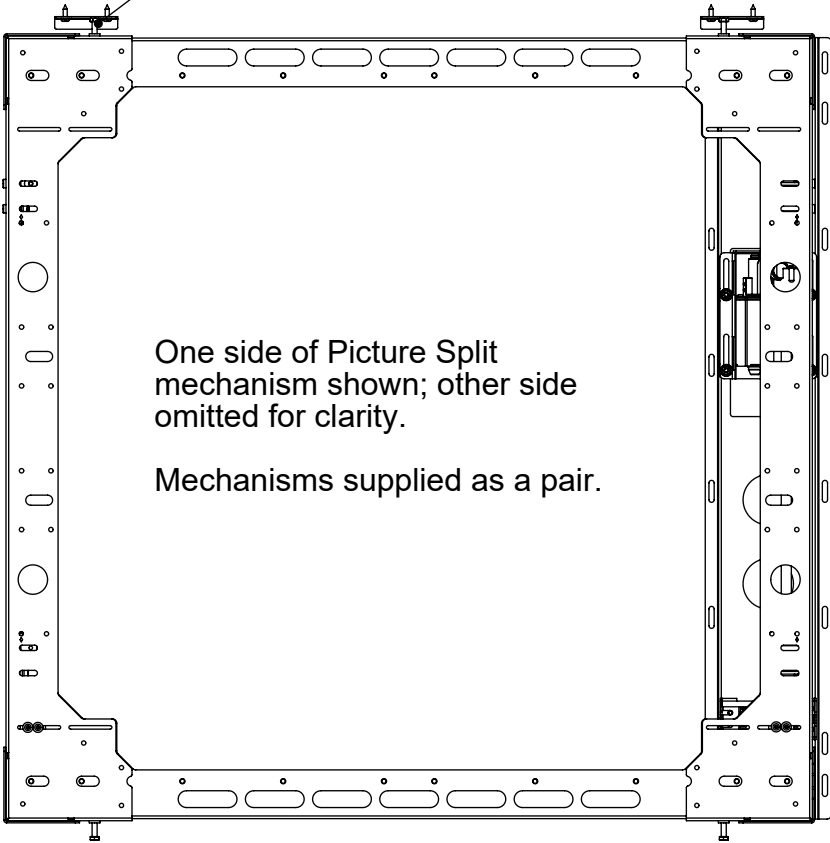

One side of Picture Split mechanism shown; other side omitted for clarity.

Mechanisms supplied as a pair.

PIC SP 3


PICTURE SPLIT MECHANISM



future automation

PANEL TRAVEL DETAILS

The maximum travel distance is 825 [32.5] per panel. This accommodates for the MAX recess width for the PIC SP 3(1650[65.0])

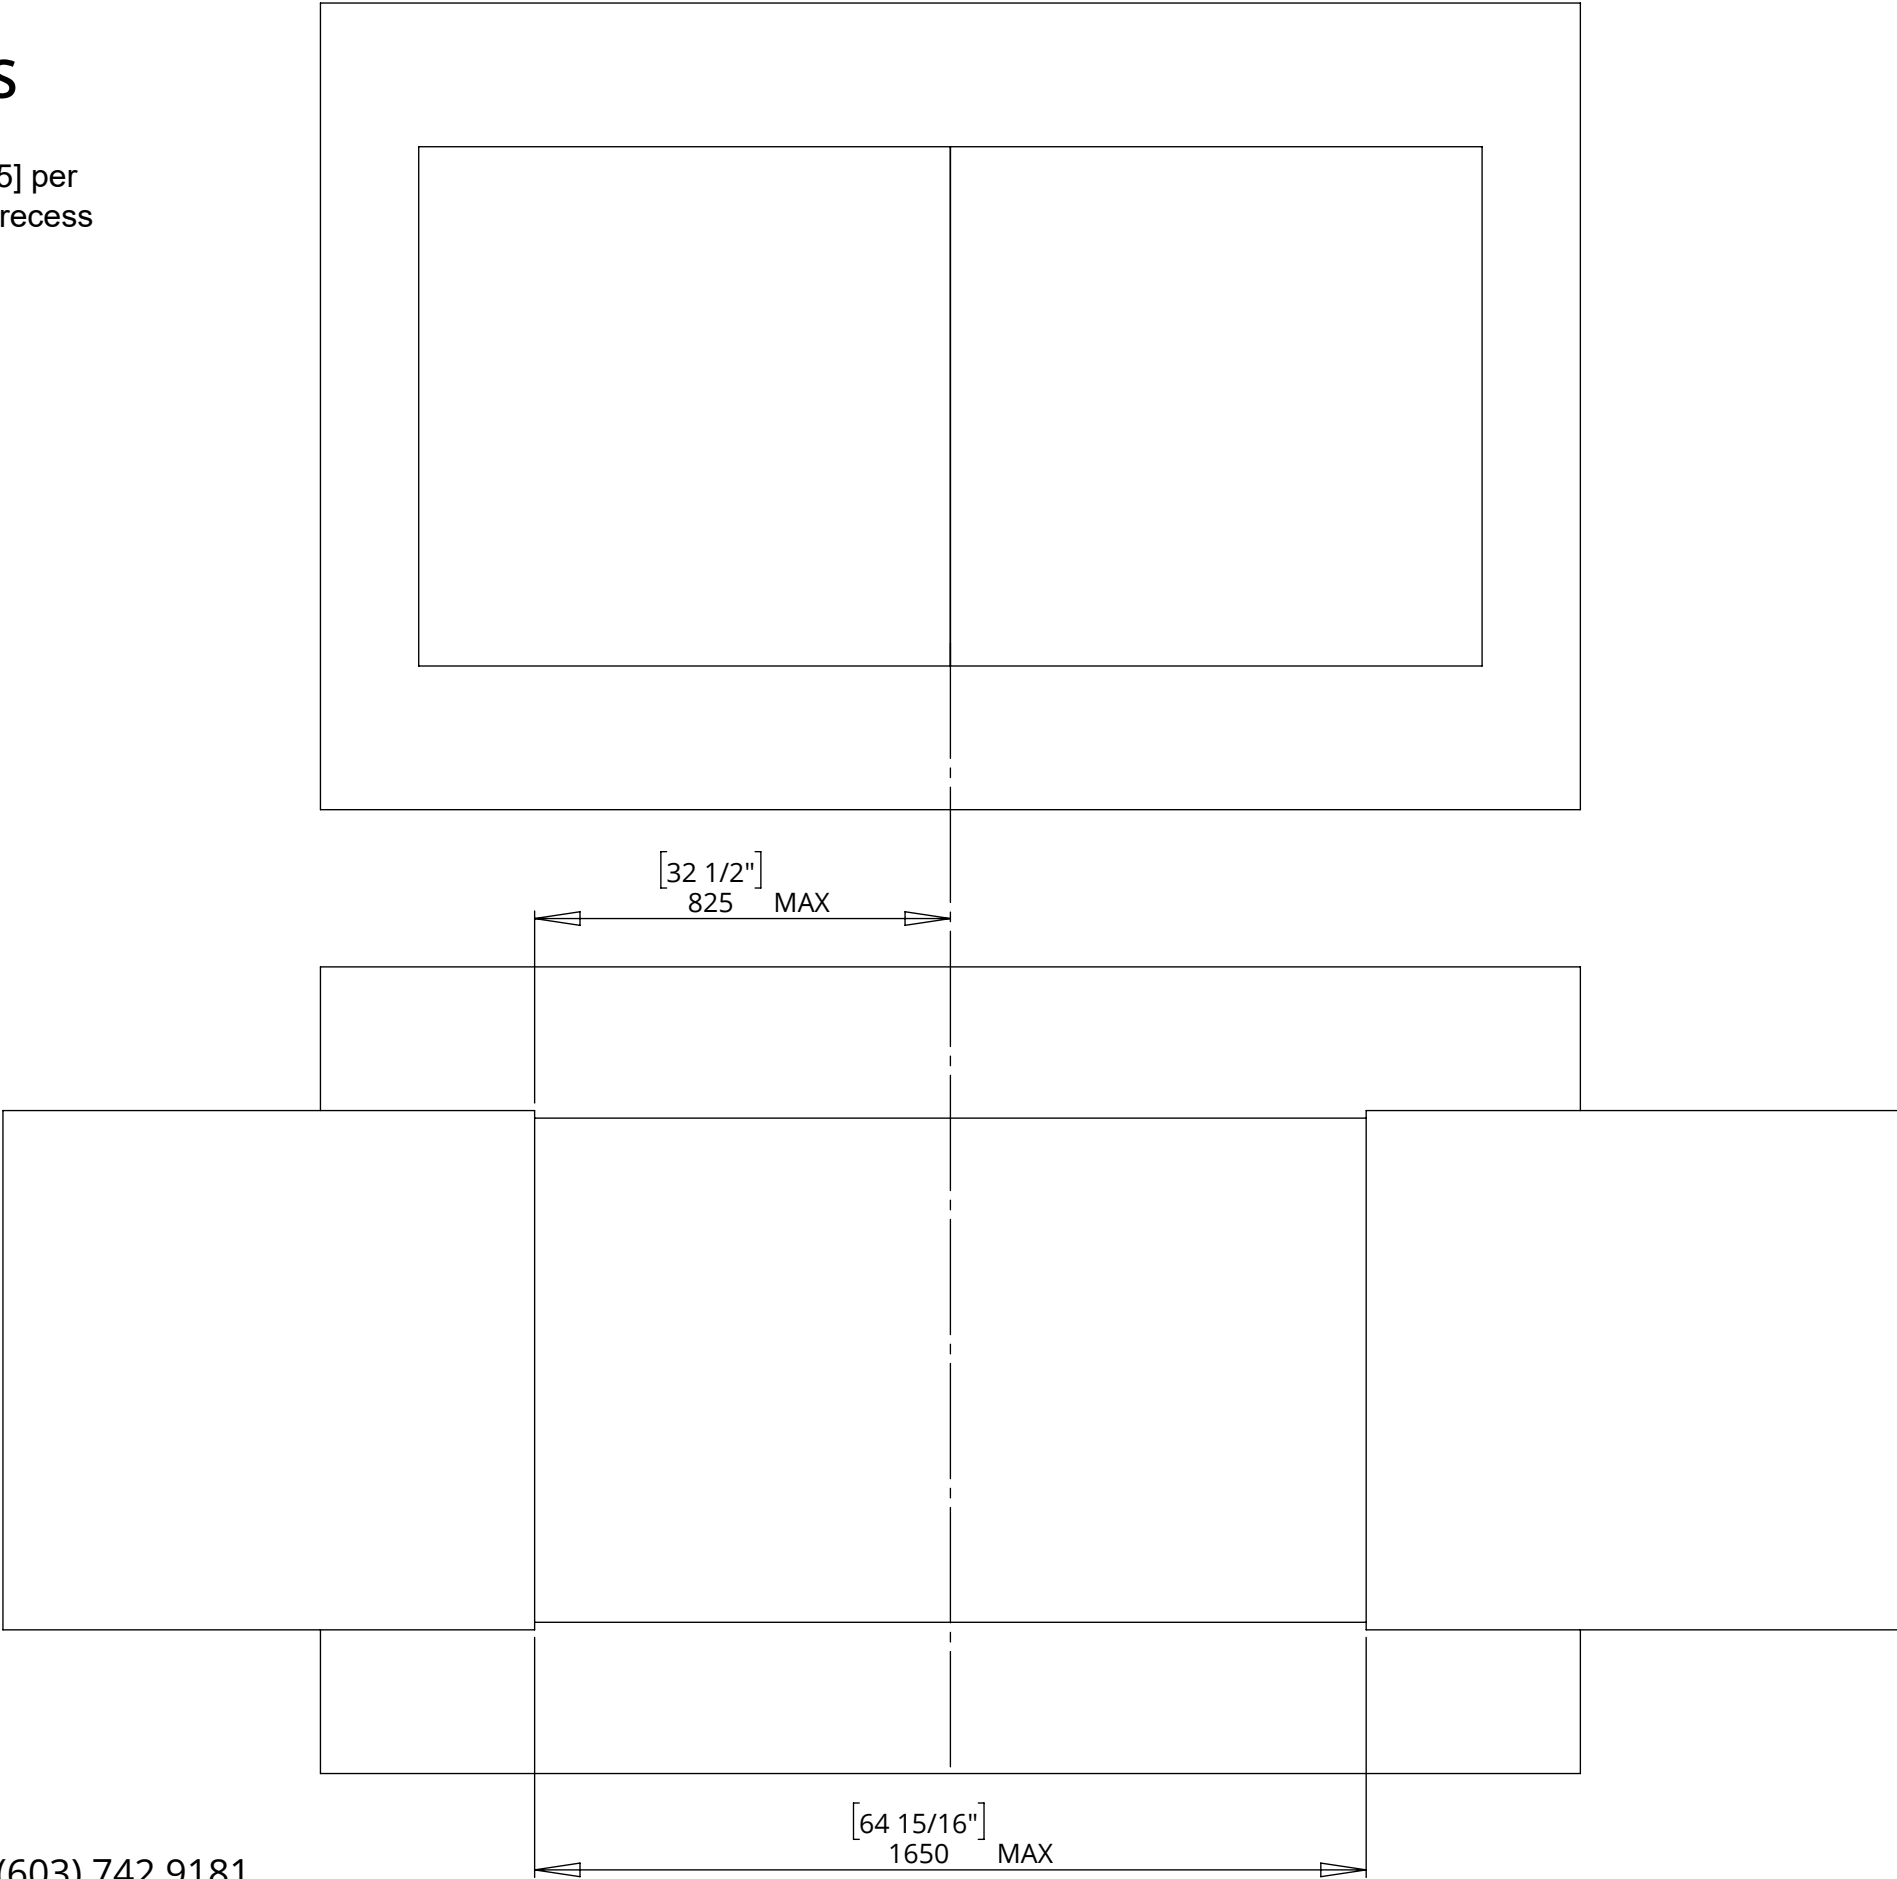

PIC SP 3


PICTURE SPLIT MECHANISM



future automation

MOUNTING DETAILS

These are suggested dimensions for positioning the mechanisms on the wall. The dimensions are based around the panel sizes stated on **Page 4**.

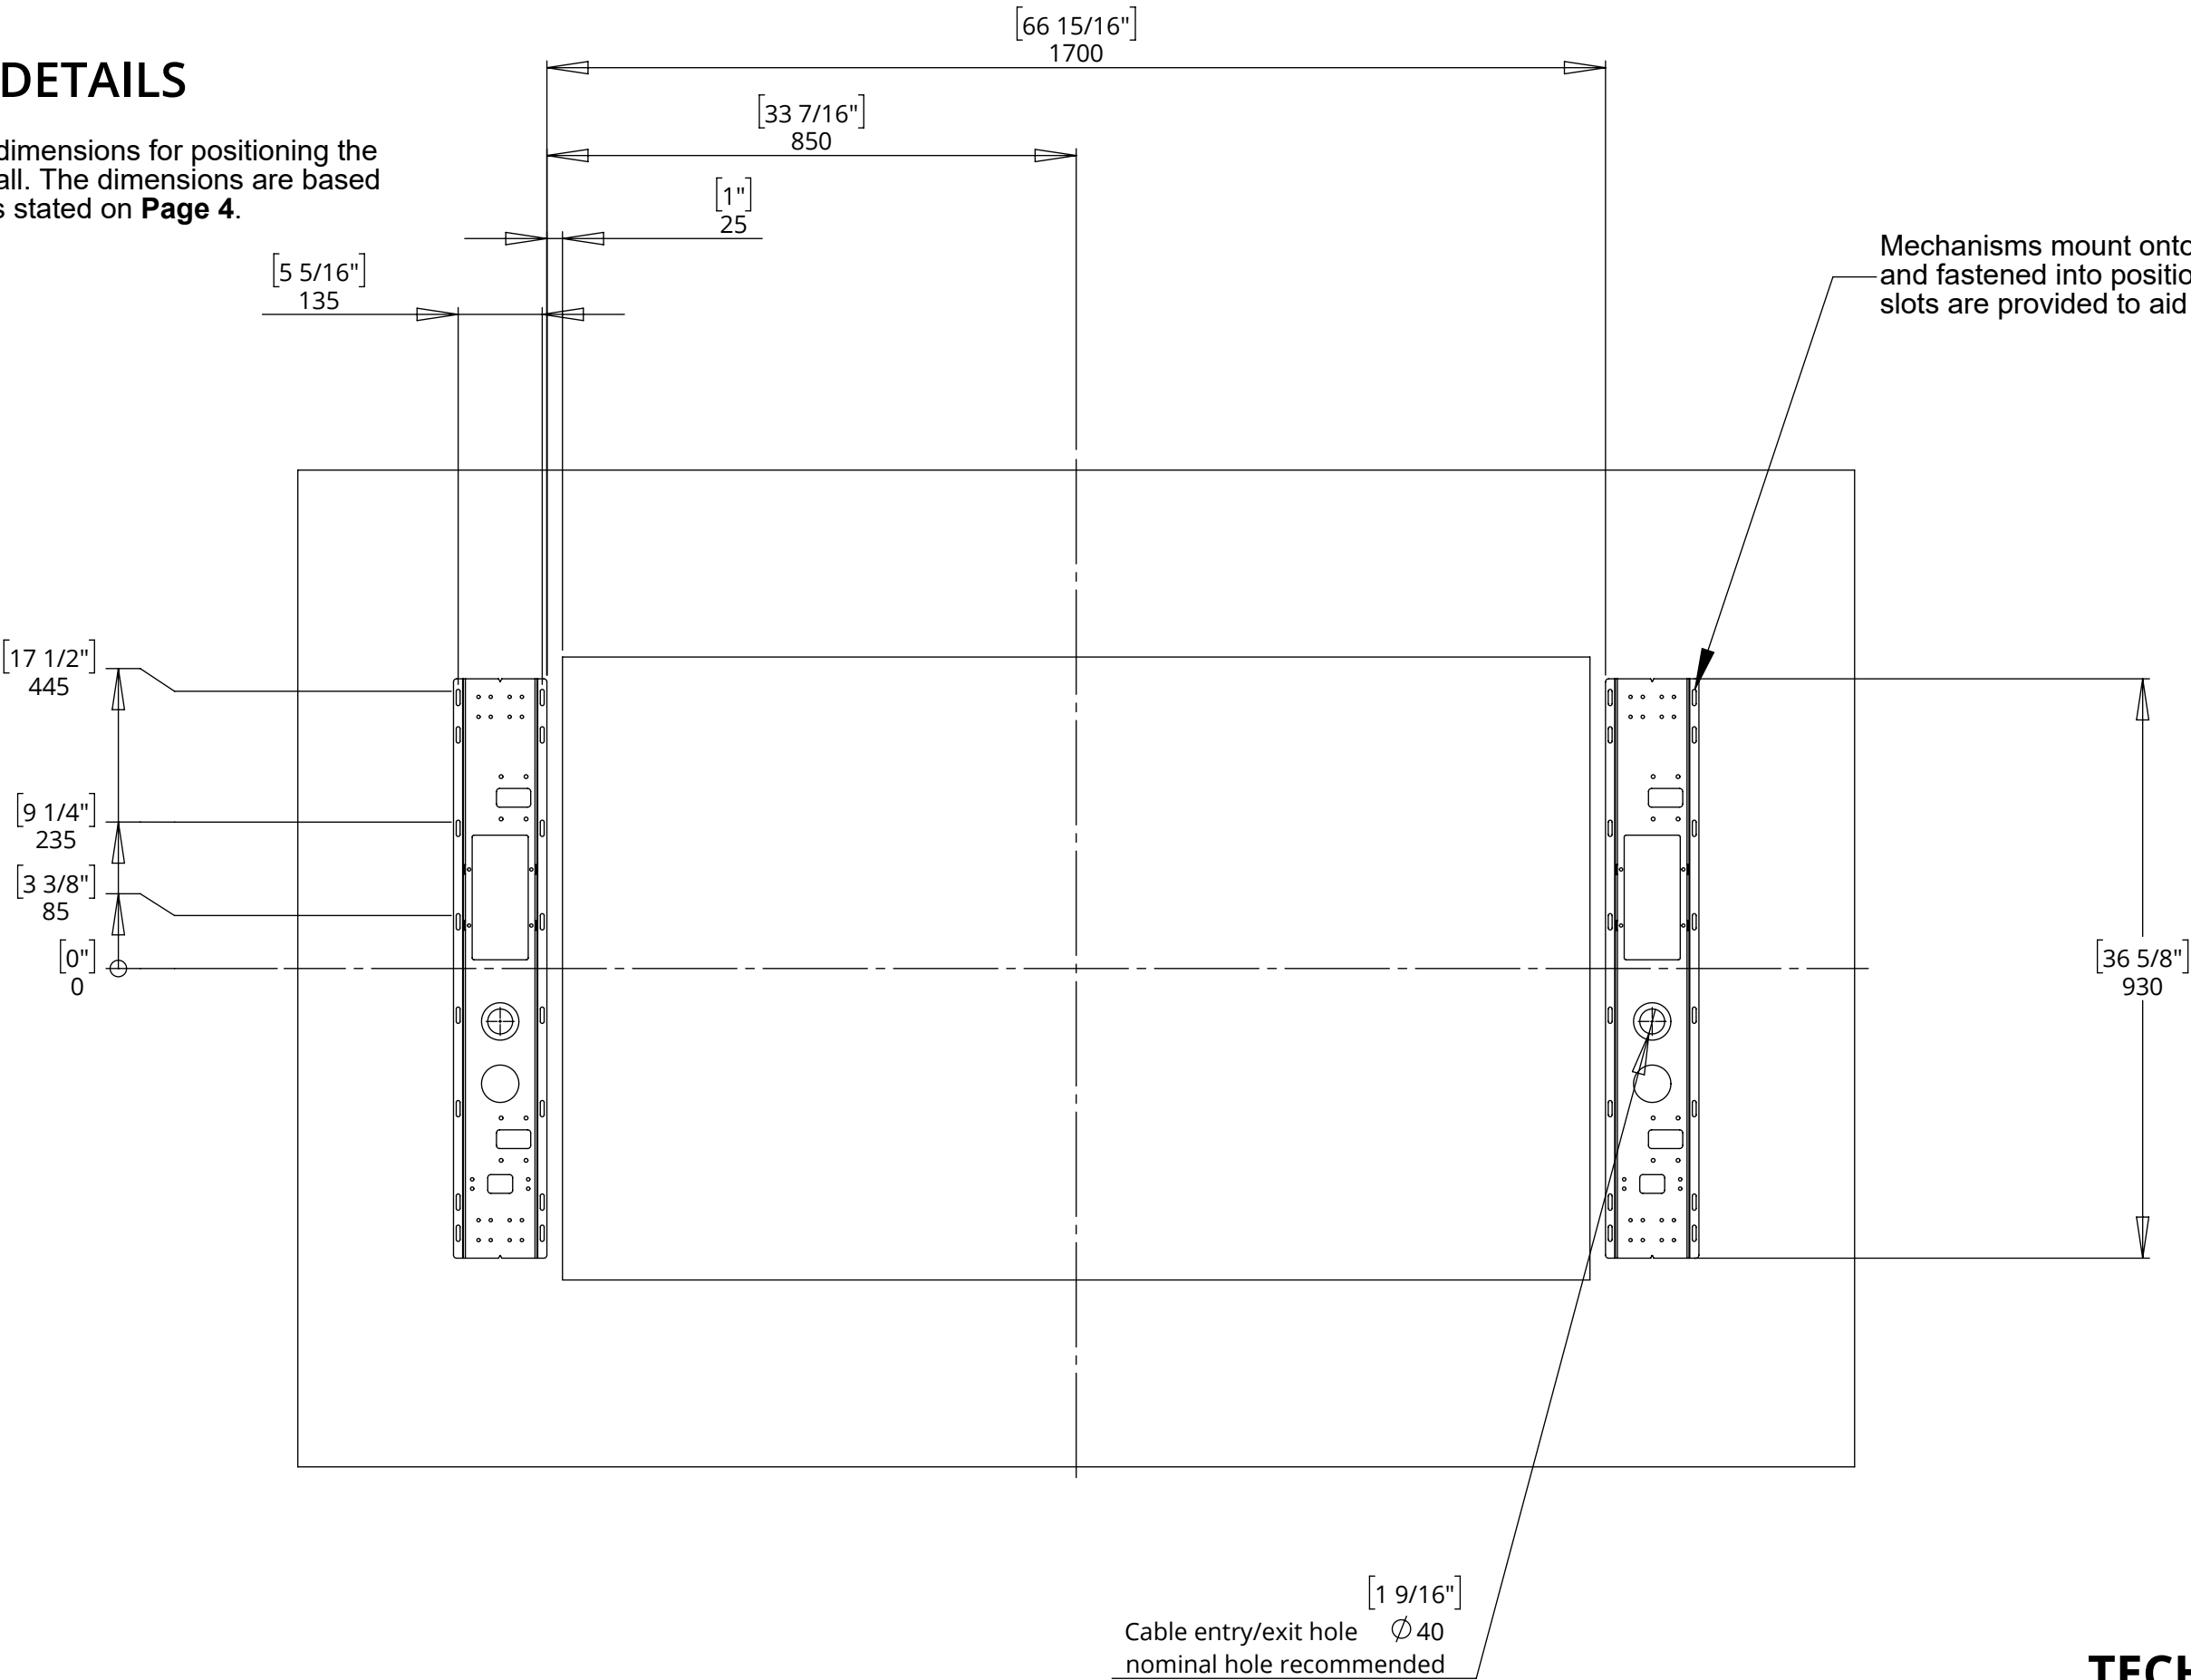

PIC SP 3

PICTURE SPLIT MECHANISM

CONTROL BOX DETAILS

- Power Supply Unit (PSU) will allow 110V or 240V AC input. The same PSU is used for EU or US mains supplies.
- Other than control cables, all cables terminate at the control board via standard phoenix connectors.
- Cable loom length supplied at approx. 4m [158"]. Loom can be extended to a maximum of approx. 10m [400"].
- Minimum cable bend radius 25mm [1"].

