



SPECIFICATION	MEASUREMENTS
Pole Outer Diameter	51mm (2")
Pole Inner Diameter	48mm (1.88")
Maximum Weight Capacity	35Kg (77lb)
Decibel Rating	44Db
Product Weight	Variable
Packaging Dimensions	Variable
Shipping Weight	Variable
Maximum Rotation	180° - Bi-directional
Adjustments	Pitch, Roll and Yaw are adjustable
Movement Type	Motorised
Power Supply Required	110V - 240V AC
Power Consumption Standby	3W
Cable Management	Through pole centre
Control Options	IR Remote, RS232, Contact Closure
Product Options / Features	Projector Specific mounts / adapters, Custom RAL paint finishes, Marine suitable version
Package Contents	Mechanism, IR remote control
Marine Suitable	No


future automation

MECHANISM MOUNTING OPTIONS

The mechanism is supplied with all necessary components for mounting between joists, on a flat platform between joists, or to suspend from a Unistrut arrangement above.

Telescopic Joist Mounting Brackets are attached as standard and must be removed for platform or unistrut mounting.


MOUNTING BETWEEN JOISTS

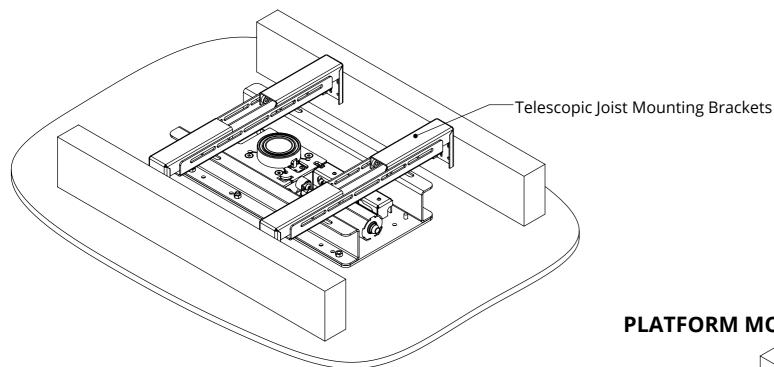

Slots in the top faces allow for M8 studding to be fixed between unistrut and mechanism

UNISTRUT MOUNTING

PLATFORM MOUNTING

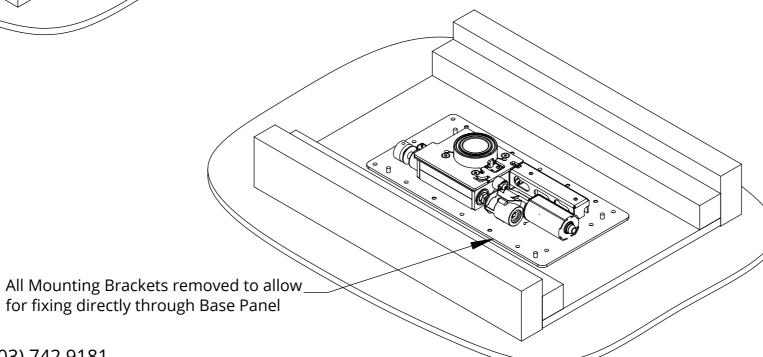

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181

WWW.FUTUREAUTOMATION.NET

TECHNICAL SHEET


fa future automation


CABLE MANAGEMENT

The PME's mounting allows for cables from the screen to be fed through the intergrated cable management. This allows the cables to be stowed tidily and safely within the mechanism.


The Mechanism Cable should be routed to the provided control box. This should be stored in an easily accessible location.

Projector Cables
 Mechanism Cables
 Power Cable
 Control Signal (RS232, IR, Contact Closure)

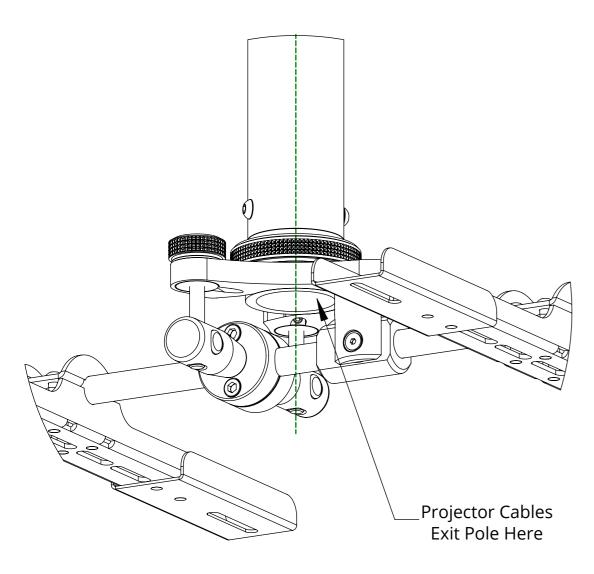

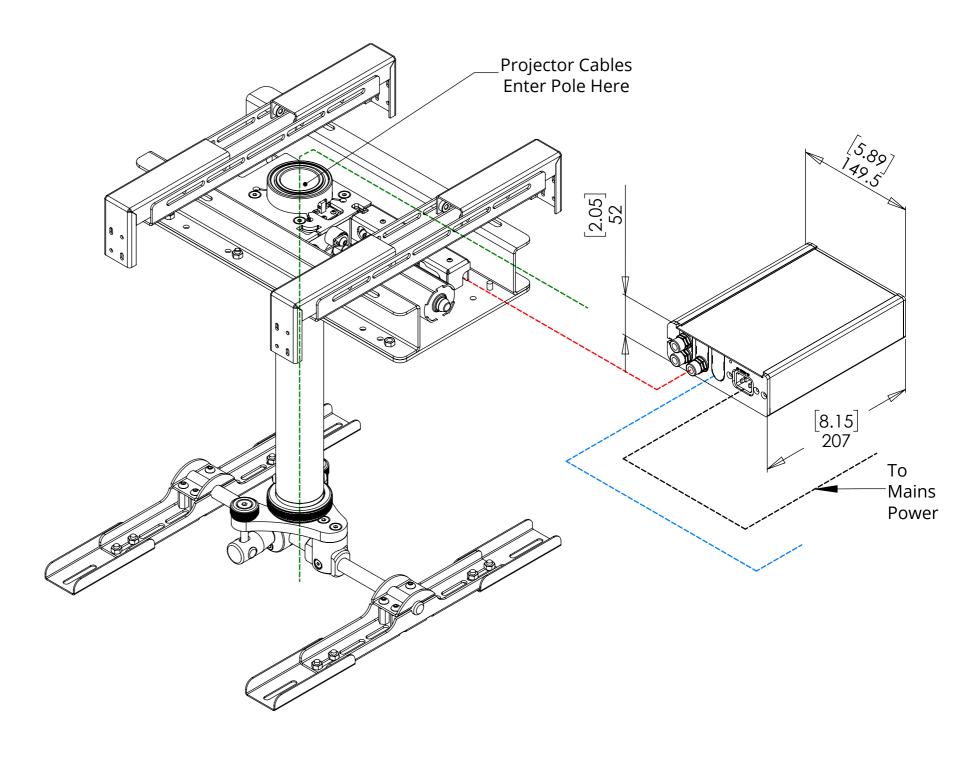




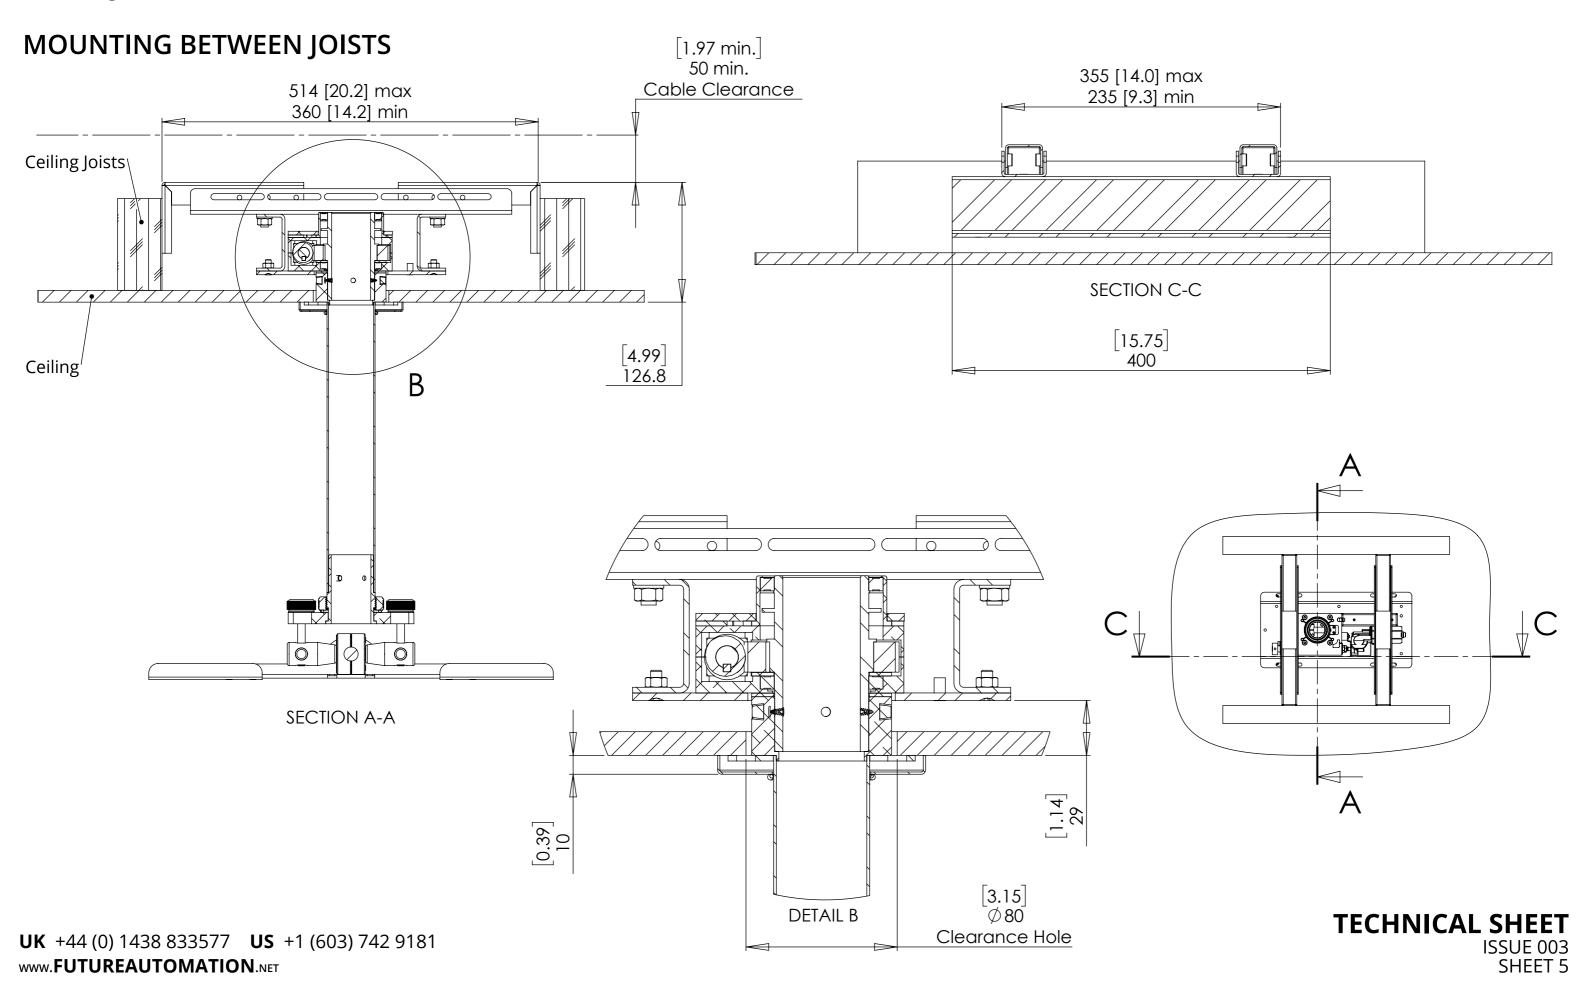




future automation

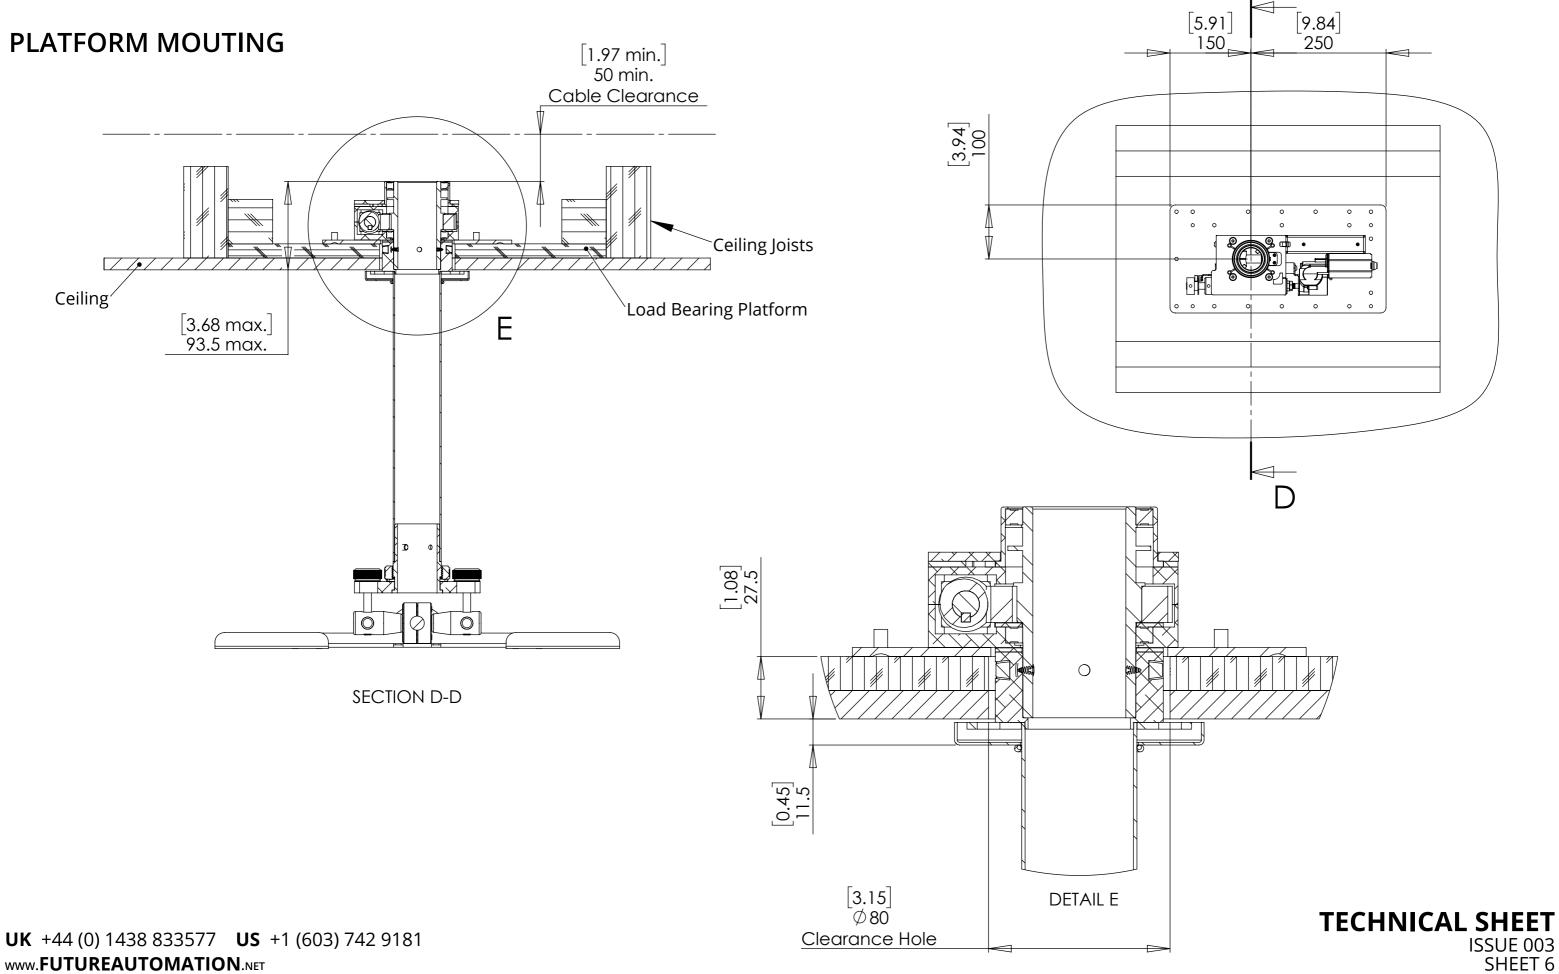

www.FUTUREAUTOMATION.NET

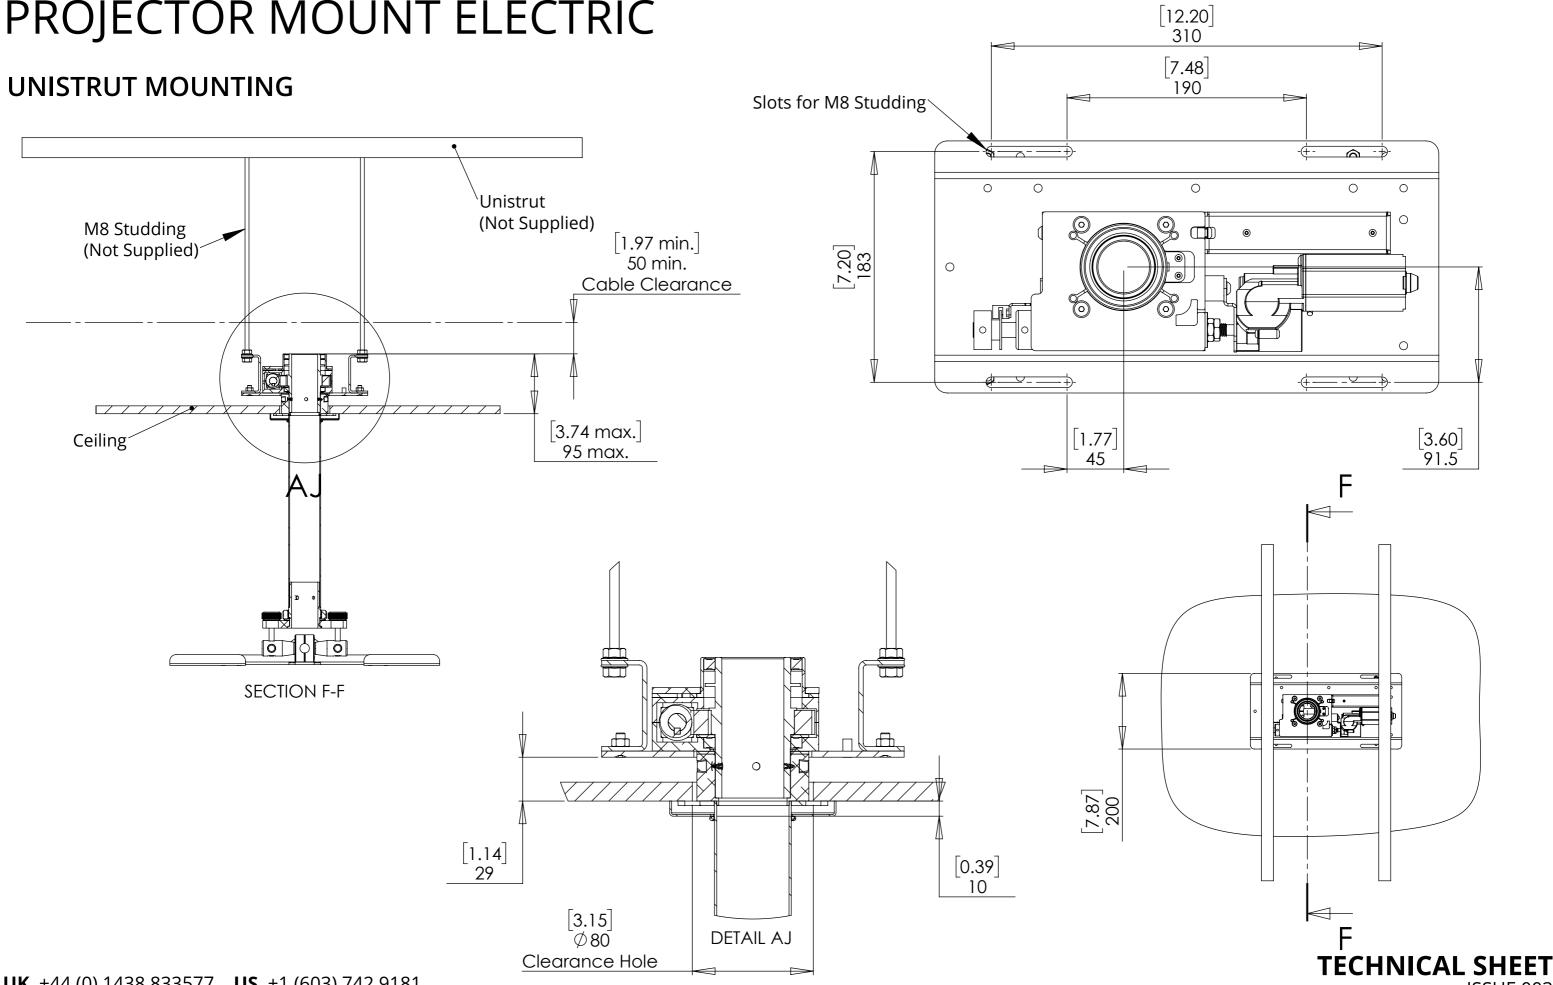

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181 www.**FUTUREAUTOMATION**.NET

ISSUE 003 SHEET 7

MECHANISM DIMENSIONS

