

The SubContractor Series Amplifier Back Panel


The SC-1250 back panel provides a host of hookup and configuration options, including multiple outputs, 12-volt trigger, IR repeater jack, RS-232 control port (Crestron Certified), and output up to two SC Series subs.



SPECIFICATIONS

Model	SC-1250 Amplifier
Amplifier (dual-mono)	3000 Watts Dynamic
Class D	1250 Watts RMS Power
High Pass Crossover	80Hz (6 dB/octave)
Low Pass Crossover	30Hz-160Hz, Defeatable, 24 dB/octave slope
Inputs	Line and Speaker Level
Outputs	Line Level, 80Hz up, Speaker Level for up to two subwoofers
Phase	0°, 90°, 180°, 270°
Dimensions (H/W/D) (Inc. feet & grille)	4.25" x 17.0" x 13.0" 11 cm x 43.2 cm x 33 cm ** Allow two extra inches in depth for wire connectors and power cable. ** Includes feet. Feet can be removed for rack mount use. Unit is approximately "two rack units" high.
Shipping Weight (approx.)	25 lbs. (11 kg)

The SubContractor Series Subwoofers — a sub for every situation.

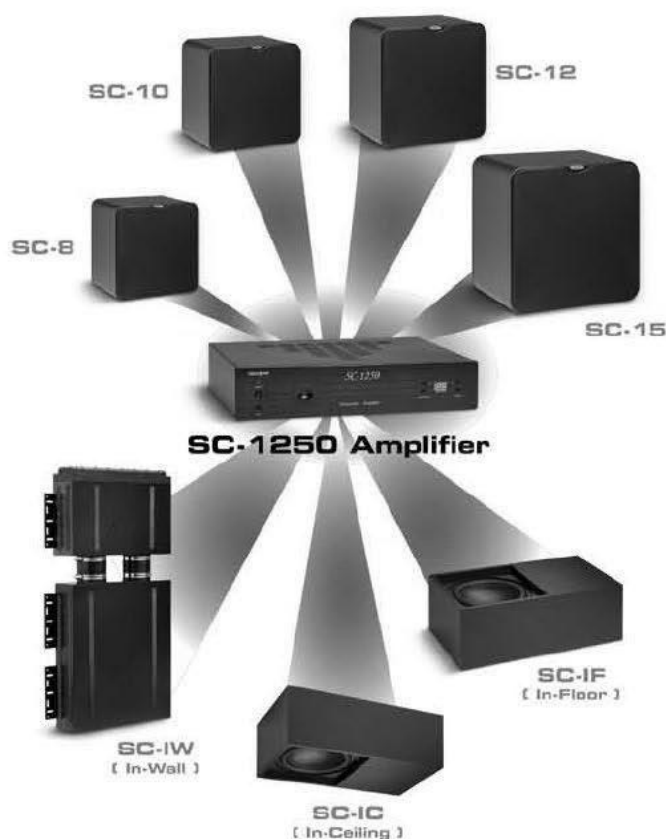

Copyright ©2009 Velodyne Acoustics, Inc. Specifications subject to change without notice. Other trademarks or registered trademarks are property of their respective owner. Nov 2009

VELODYNE ACOUSTICS, INC.

345 Digital Drive
Morgan Hill, CA 95037
408.465.2800

www.velodyne.com

