


WIRING

1. Attach the speaker cables to the speaker cable terminals located on the back of the IOS speaker.
2. Connect the speaker cable while ensuring proper polarity with the amplifier, + to + (red) and – to – (black).
3. Also ensure that the right channel of the amplifier is connected to the right speaker and left channel to the left speaker.



Speaker Cable Terminals

PLACEMENT

Outdoor Installations


1. When mounting the IOS speakers outdoors, the eaves of the roof provide an ideal location as they reduce the exposure of constant direct sunlight and precipitation.
2. If installing speakers on a boat, the wheelhouse provides the best location for the same reasons.

Indoor Installations

1. When placing the IOS speakers on a wall or bookshelf, we recommend that they are mounted at ear level or slightly higher.
2. The usual listening area should be no closer to the speakers than the distance between the speakers themselves.

MOUNTING

1. The IOS speaker is supplied with a U shaped wall mounting bracket that can be installed vertically or horizontally.
2. Use screws, bolts or anchors (not included) that are capable of supporting the weight of the speaker to mount the bracket.
3. Once the wall mounting bracket is securely fastened, insert thumbscrews through bracket into the speaker.
4. Rotate the speaker to desired position and tighten the thumbscrews.
5. There are two M6 inserts located on the back of the speaker for other types of mounting brackets.
6. Make sure to select a bracket capable of supporting the weight of the speaker.

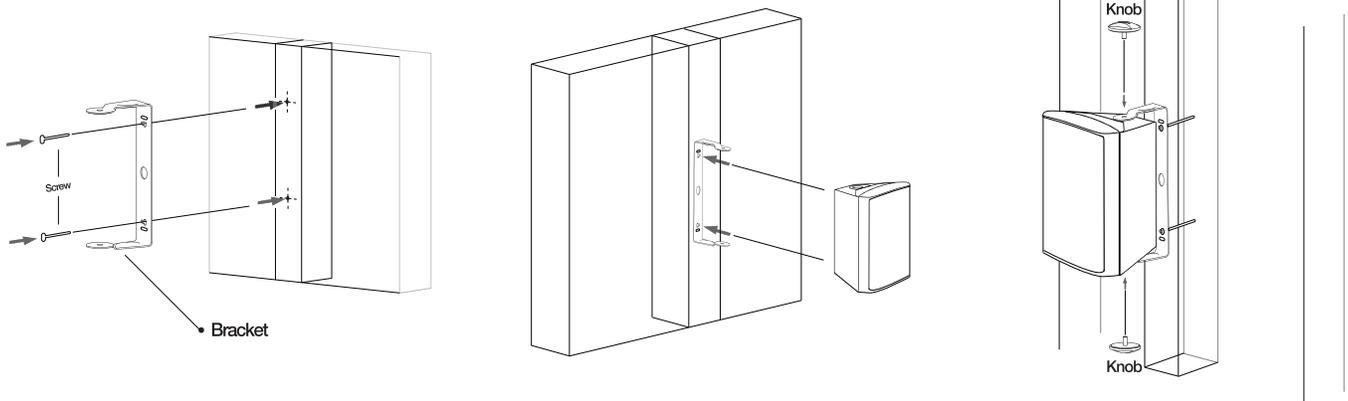

ADJUSTMENTS

1. Depending on the listening area, you may find the sound more pleasing by pointing the tweeters towards the listening area.
2. If additional treble is desired, carefully remove the grille and gently push at the edge of the tweeter to point the tweeter in the desired location. **CAUTION:** Touching the tweeter dome may result in damage to the tweeter.

LIMITED LIFETIME WARRANTY

Vanguard Dynamics warrants to the original retail purchaser only that this Vanguard Dynamics product will be free from defects in materials and workmanship, provided the speaker was purchased from a Vanguard Dynamics Authorized Dealer. Defective products must be shipped, together with proof of purchase, prepaid insured to the Vanguard Dynamics Authorized Dealer from whom they were purchased, or to the Vanguard Dynamics factory at the address listed on this installation instruction manual. Freight collect shipments will be refused. It is preferable to ship this product in the original shipping container to lessen the chance of transit damage. In any case, the risk of loss or damage in transit is to be borne by the purchaser. If, upon examination at the Factory or Vanguard Dynamics Authorized Dealer, it is determined that the unit was defective in materials or workmanship at any time during this warranty period, Vanguard Dynamics or the Vanguard Dynamics Authorized Dealer will, at its option, repair or replace this product at no additional charge, except as set forth below. If this model is no longer available and can not be repaired effectively, Vanguard Dynamics, at its sole option, may replace the unit with a current model of equal or greater value. In some cases where a new model is substituted, a modification to the mounting surface may be required. If mounting surface modification is required, Vanguard Dynamics assumes no responsibility or liability for such modification. All replaced parts and product become the property of Vanguard Dynamics Products replaced or repaired under this Warranty will be returned to the original retail purchaser, within a reasonable time, freight prepaid.

This Warranty does not include service or parts to repair damage caused by accident, disaster, misuse, abuse, negligence, inadequate packing or shipping procedures, commercial use, voltage inputs in excess of the rated maximum of the unit, or service, repair or modification of the product which has not been authorized or approved by Vanguard Dynamics. This Warranty also excludes normal cosmetic deterioration caused by environmental conditions. This warranty will be void if the Serial Number on the product has been removed, tampered with or defaced.

This Warranty is in lieu of all other expressed warranties. If the product is defective in materials or workmanship as warranted above, the purchaser's sole remedy shall be repair or replacement as provided above. In no event will Vanguard Dynamics be liable for any incidental or consequential damages arising out of the use or inability to use the product, even if Vanguard Dynamics or a Vanguard Dynamics Authorized Dealer has been advised of the possibility of such damages, or for any claim by any other party. Some states do not allow the exclusion or limitation of consequential damages, so the above limitation and exclusion may not apply.

All implied warranties on the product are limited to the duration of this expressed Warranty. Some states do not allow limitation on the length of an implied warranty. If the original retail purchaser resides in such a state, this limitation does not apply. In our attempt to constantly improve our products, features and specifications are subject to change without notice.

